

JCS60 U.S. PTO
01/11/99

PETERS VERNY JONES & BIKSA, LLP

ATTORNEYS AT LAW

PATENTS, TRADEMARKS AND COPYRIGHTS

385 SHERMAN AVENUE • SUITE 6 • PALO ALTO, CA 94306-1840

TEL: (650) 324-1677 • TELEX: 292-672 • FAX: (650) 324-1678

JCS60 U.S. PTC
09/228821
01/11/99

THE COMMISSIONER OF PATENTS AND TRADEMARKS
Washington, D.C. 20231

Case Docket No. 3596.02-1 (HMP)

EL221763202US

Sir:

"Express Mail mailing label number EL221763202US

Date of Deposit January 11, 1999

I hereby certify that this correspondence is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Commissioner of Patents and Trademarks, Washington, D.C. 20231.

Joel Dager
(Name of person mailing paper or fee)

Joel Dager 1/11/99
(Signature of person mailing paper or fee)

Transmitted herewith for filing is the continuation-in-part patent application from: U.S. Serial No. 60/071,181, filed 12 January 1998; Serial No. 60/079,686, filed 27 March 1998 and Serial No. 60/093,305 filed 17 July 1998

Inventors: Deborah Wenzel

For: COMPOSITION AS AN ADDITIVE TO CREATE CLEAR STABLE SOLUTIONS AND MICROEMULSIONS WITH A COMBUSTIBLE LIQUID FUEL TO IMPROVE COMBUSTION

Enclosed are:

- (1) Transmittal Letter, in duplicate;
- (2) 83 Sheets of Description, 18 Sheets of Claims, 2 Sheets of Abstract: Total of 103 sheets of specification
- (3) 10 Sheets of formal drawings (Figures 1 through 19) color
- (4) Copy of Previously Filed Small Entity Statement;
- (5) Signed Declaration and Power of Attorney
- (6) A check in the amount of \$461.00
- (7) Postcard

FILING FEE CALCULATION - CLAIMS AS FILED					(5) BASIC FEE	
(1) FOR		(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	SMALL	OTHER
TOTAL CLAIMS	SMALL	20-20	9	\$9.00	\$ 380.00	760.00
	OTHER			\$18.00	\$ 81.00	
INDEP. CLAIMS	SMALL	3	0	\$39.00	\$ 0	
	OTHER			\$78.00		
TOTAL FILING FEE →					\$ 461.00	

Our check in the amount of \$461.00 includes:

- [X] \$461.00 for the Filing Fee.
[] \$40.00 for filing of the Assignment;
[X] The Commissioner is hereby authorized to charge any additional fees which may be required under 37 CFR 1.16, or credit any overpayment to Account No. 16-1331.

Date: January 11, 1999

Howard M. Peters
HOWARD M. PETERS, (REG. NO. 29,202)

Applicant or Patentee: DEBORAH WENZEL

Atty.'s Docket No.: 3596.02-1 (hmp)

Serial No.:

Date Filed: January 11, 1999

For: COMPOSITION AS AN ADDITIVE TO CREATE CLEAR STABLE SOLUTIONS AND MICROEMULSION WITH A COMBUSTIBLE LIQUID FUEL TO IMPROVE COMBUSTION

**DECLARATION CLAIMING SMALL ENTITY STATUS
[37 C.F.R. 1.9(f) and 1.27(b)] - INDEPENDENT INVENTOR**

As a below named inventor, I hereby declare that I qualify as an independent inventor defined in 37 C.F.R. 1.9(c) for purposes of paying reduced fees under section 41(a) and (b) of Title 35, United States Code, to the U.S. Patent and Trademark Office with regard to the invention entitled COMPOSITION AS AN ADDITIVE TO CREATE CLEAR STABLE SOLUTIONS AND MICROEULSIONS WITH A COMBUSTIBLE LIQUID FUEL TO IMPROVE COMBUSTION described in

☐ the specification filed herewith
☒ application serial no. _____, filed January 11 1999
☐ patent no. _____, issued _____

I have not assigned, granted, conveyed or licensed and am under no obligation under contract or law to assign, grant, convey, or license, any rights in the invention to any person who could not be classified as an independent inventor under 37 C.F.R. 1.9(c) if that person had made the invention, or to any concern which would not qualify as a small business concern under 37 C.F.R. 1.9(d), or a nonprofit organization under 37 C.F.R. 1.9(e).

Each person, concern or organization to which I have assigned, granted, conveyed, or licensed or am under an obligation under contract or law to assign, grant, convey, or license any rights in the invention is listed below:

☒ no such person, concern, or organization
☐ persons, concerns or organization listed below*

NAME _____

ADDRESS _____
☐ INDIVIDUAL ☐ SMALL BUSINESS CONCERN ☐ NONPROFIT ORGANIZATION


NAME _____

ADDRESS _____
☐ INDIVIDUAL ☐ SMALL BUSINESS CONCERN ☐ NONPROFIT ORGANIZATION

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 C.F.R. 1.28(b)).

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

DEBORAH WENZEL 534 Ashbury Street, San Francisco, California 94117
NAME OF INVENTOR


Signature of Inventor

January 11, 1999
Date

COMPOSITION AS AN ADDITIVE TO CREATE CLEAR
STABLE SOLUTIONS AND MICROEMULSIONS WITH A
COMBUSTIBLE LIQUID FUEL TO IMPROVE COMBUSTION

BACKGROUND OF THE INVENTION

5 Related Applications

This application is a continuation-in-part application of U.S. Serial No. 60/071,181, filed January 12, 1998; U.S. Serial No. 60/079,686, filed March 27, 1998; and U.S. Serial No. 60/093,305, filed July 17, 1998, all of which are incorporated herein by reference in their entirety.

10 Field of the Invention

The present invention concerns a novel composition of ingredients which are used as an additive to a combustible liquid fuel to produce a clear stable solutions or microemulsions with the fuel. The additive meets or exceeds liquid property specification requirements of the combustible fuel and greatly improves the overall
15 combustion of the fuel while reducing significantly unwanted smoke, particulates, toxic gases, noxious gases and the like. Specifically the additive composition includes one or more of the following: aqueous or anhydrous water-soluble alcohols and includes optionally one or more of the following: water-insoluble alcohols; ethoxylated alcohols; and fatty acids partially neutralized with a volatile source of basic nitrogen,
20 while specifically limiting the use of ethylene oxides and specifically excluding conventionally used glycerine, esterification products, metals, non-biodegradable solvents, and certain other components.

Description of Related Art

Much research, effort and time have been expended to produce fuel
25 compositions for internal combustion engines which show significant decreases upon combustion of toxic exhaust gases or vapors, particulates, smoke, and the like without sacrifice of engine performance or efficiency.

It is currently known by those skilled in the art that the introduction of oxygenators into fossil fuels contributes to better burning and the reduction of toxic
30 exhaust emissions. Ethanol is one such oxygenator which, when used with gasoline for instance, reduces toxic emissions.

A problem, however, is that ethanol attracts water and will separate from gasoline in the presence of certain amounts of water condensation. Another problem is

that ethanol is generally denatured using methanol, which exacerbates the problem of water separation and produces unacceptable solvency levels, such that ethanol/methanol/gasoline mixtures cannot be transported through existing pipelines.

5 The present invention solves the problem of water condensation in the presence of ethanol/gasoline mixtures by creating clear microemulsions that are bio-degradeable, do not separate, and actually make use of small amounts of water for superior combustion temperatures. The present invention also solves the problem of solvency levels of ethanol/gasoline mixtures by utilizing components that meet storage and shipping requirements for gasoline.

10 Another problem associated with using ethanol as an oxygenator is that ethanol, as well as methanol and other water-soluble alcohols, will not mix at all with less refined fossil fuels, such as Diesel fuel or other distillate fuels like kerosene.

The present invention makes it possible to introduce ethanol into Diesel and other distillate fuels, forming bio-degradable clear, stable solutions and microemulsions
15 that will absorb water condensation for optimal combustion temperatures and uses other water-soluble alcohols for their oxygenating properties.

There are many components which when mixed together form emulsions with liquid hydrocarbons, fuels, refined renewable resources (vegetable oils) and the like. However, most mixtures of components do not meet the present set of fuel storage and
20 combustion regulations and engine performance parameters.

These requirements include, for example:

A fuel/additive composition must form a clear, stable, water-in-oil microemulsion where water and water-soluble components are very finely dispersed throughout the continuous phase which must be the oil phase.

25 In order for efficient combustion to occur, the flame front in the combustion chamber must contact oil first to maintain optimum combustion temperature. The presence of any water at all will reduce combustion temperature. The presence of an optimal amount of water and water-soluble alcohol inside the oil droplet (in the micelle of the micro-emulsion) produces balanced, optimal fuel/oxygen ratios and combustion
30 temperatures where carbon present is more completely burned.

When this slightly reduced but still high level of heat reaches the extremely fine water droplet, the water is transformed into steam. The expansion of liquid water to steam (at a ratio of 1:600) also produces power of its own, which further enhances

engine performance.

On the other hand, an oil-in-water emulsion will not perform in the same way. With water as the continuous phase, water contacts the flame front first. The water diminishes or puts the fire out, and then the smoldering flame contacts oil. The results of this incomplete combustion are extremely high hydrocarbon (unburned fuel), particulates, smoke, etc. emissions and significantly reduced power. Nitrogen oxides are usually reduced; however, that is because the temperature of combustion is also reduced below any efficiency level.

Diesel engines are particularly suited to fuel/additive combustion enhancement. Compression ignition engines rely on the heat of compression to produce combustion of fuel; however, it is the compression and expansion of air that is the important power dynamic which makes Diesel engines highly effective.

Fuel/additive power enhancement works on the same principle. At the top of the compression stroke, a small amount of fuel/alcohol/water mixture ignites and explodes. The fuel burns, and now both air and steam expand together to produce power.

Fuel/additive combustion enhancement is made possible by the presence of increased oxygen levels provided by water-soluble alcohols and water. An optimal fuel:oxygen ratio is produced allowing for the complete combustion of available carbon.

The same principle works in a gasoline, spark-ignited engine. As spark-ignited engines are designed, power comes only from the expansion of the explosion of gasoline which is limited compared to the power produced by the compression and expansion of air. The fuel/additive gives these relatively low-efficiency engines the benefit of the water to steam expansion as well as improved oxygenation for more complete burning of carbon.

Even though they produce much greater power levels, the emissions problem associated with Diesel engines has always been difficult to solve. Diesel fuel is usually too rich in hydrocarbons to maintain the delicate balance required for optimal power and complete burning of carbon. Without modification, Diesel fuel burns incompletely. Diesel fuel contains too much carbon in relation to the amount of available oxygen and for what it has to accomplish in the split second before the piston starts moving away from its highest compression (heat) point.

The addition of certain oils, alcohols, and water produce an efficient combination and combustion is extremely enhanced. Vegetable-based components and most alcohols have slightly lower cetane (BTU) value than other fuels. However, water and water-soluble alcohols increase available oxygen and maintain optimal
5 temperatures in the combustion chamber so that essentially all available carbon is burned and utilized for power, rather than being emitted as carbon particles in exhaust smoke. At the same time, water enhances power through expansion as steam and cleans engine parts with its detergent properties.

Although some of the following components may be useful in producing clear,
10 stable microemulsions, they cannot be included in a formulation intended for use as a fuel in an internal combustion engine.

The U.S. Environmental Protection Agency (EPA) specifically rules against fuel compositions with sulphur, aromatic hydrocarbons, and metals of any kind because of the resulting detrimental emissions byproducts. To meet EPA and California (CA) Air
15 Resources Board (CARB) standards only the elements carbon, hydrogen, oxygen, or nitrogen (CHON) can be included.

For instance, sodium or potassium salts in the presence of fatty acids also form a microemulsion, but do not fall into the CHON classification, and also cannot be used because of excessive corrosive properties.

20 Even among possible components that fall within the CHON classification, many are still unsuitable for the intended use. For example, ethylene oxides enhance microemulsion stability, but impede combustion, and can be used only in very limited amounts.

Even among possible CHON components that show promising combustion
25 qualities, many are still unsuitable for optimum performance. For an additive composition to be useful it must meet these qualifications:

1. It must be stable at high and low temperatures.
2. It must maintain a viscosity similar to fossil fuel in all temperature and pressure conditions.
- 30 3. It must not damage engine or fuel system parts.
4. It must be usable with little or no retrofit of engine or fuel system parts.
5. It must maintain a power level suitable to its particular application.
6. It must show an improvement in engine performance or emissions and

preferably both.

7. It must not increase nitrogen oxides or hydrocarbon or carbon monoxide emissions.

Methyl esters are often used as a fossil fuel additive; however, glycerides must be removed during the esterification process, reducing and even eliminating, cost effectiveness. Gelling problems hamper their use, especially at low temperatures, and typically, methyl esters have been producing about a 5% increase in nitrogen oxides in older engines, making them unusable as far as the EPA and its regulations is concerned.

Another fuel additive is a water emulsion using naptha as its base fuel. The purpose is to reduce NOx emissions. The composition uses as much as 40-50% water. Not only does an extra fuel tank need to be installed to carry the added liquid, hydrocarbon emissions (incomplete combustion) increase dramatically as the combustion flame front hits water. NOx emissions are also reduced, but that is because there is essentially insufficient combustion to cause a nitrogen/oxygen reaction.

Another fuel additive is methyltetrahydrofuran which is currently under study as a possible additive to introduce ethanol into Diesel fuel. However, methyl-tetrahydrofuran is a highly aggressive solvent known to attack and dissolve various metals, creating a high probability for damage to engine parts if used as a fuel in existing engines.

Another fuel additive is methyl tertiary butyl ether (MTBE) which successfully improves combustion characteristics of gasoline. However, MTBE is currently under investigation by the EPA, having been shown to be a toxic groundwater contaminant. As a result, its use is banned in several states.

Some prior research in the field includes, but is not limited to:

E. Wenzel et al. in U.S. Patent 3,608,530 and 5,025,759 disclose a compression ignition (Diesel) engine having paired opposed cylinders and a lever system interconnecting the pistons of the opposed power cycle cylinders with each other and with a crank shaft. Together, the long-stroke opposed-cylinders and smooth rotary type connection to the crankshaft produce optimal combustion efficiency and optimally balanced mechanical efficiency. However, even in this efficiently designed engine, standard Diesel fuel will produce unacceptable levels of emissions and by-products under current and planned EPA regulations. On the other hand, the present invention described herein below discloses a stable fuel composition for reducing Diesel fuel

emissions as well as incorporating components derived from renewable resources to augment dwindling fossil fuel supplies.

E. Wenzel et al. in U.S. Patent 4,083,698 disclose a clear stable liquid fuel composition for internal combustion engines. The fuel composition comprises a water-in-oil (w/o) emulsion of (a) a hydrocarbon fuel, (b) water, (c) a water-soluble alcohol and a combination of surface active agents, which are stable emulsions over a wide range of temperatures. However, in all described aspects, a non-ionic surfactant is a necessary component of the additive. In all described aspects this non-ionic surfactant includes an ethylene, polyethylene, polyoxyethylene and/or polyoxypropylene addition product.

A. W. Schwab et al. in U.S. Patent 4,451,267 disclose microemulsions for vegetable oil and aqueous alcohol with a trialkylamines surfactant as an alternative fuel for Diesel engines.

A. W. Schwab et al. in U.S. Patent 4,526, 586 disclose microemulsions from vegetable oil and aqueous alcohols with 1-butanol and optionally trialkylamines as an alternative fuel for Diesel engines. There is no disclosure in U.S. Patent 4,451,267 or 4,526,586 in which the vegetable oil emulsion is mixed with hydrocarbon fuels to form a water in oil (w/o) microemulsion with a hydrocarbon fuel.

W. Fridreich et al. in U.S. Patent 4,732,576 disclose a motor fuel and fuel oil emulsions using an organic salt as an emulsifier. Specific amine polyether diacid salts are a necessary component of the additive.

J.W. Foresberg et al. in U.S. Patent 5,360,458 disclose water-oil emulsions comprising water, oil, and a minor emulsifying amount of the reaction product of at least one saturated or unsaturated aliphatic monocarboxylic acid of about 12 to 24 carbon atoms. In all aspects, at least one acid of the general formula $C_{19}H_nCOOH$ wherein n is between about 27 and 31 and having a phenanthrene nucleus and at least one amine are present as necessary components. In all aspects an aromatic hydrocarbon is a necessary component of the additive.

S.G. Schon et al. in U.S. Patent 5,004,479 disclose stable microemulsion fuel compositions which comprise (a) a hydrocarbon fuel such as Diesel fuel, jet fuel, gasoline, fuel oil, etc.; (b) water; and (c) a cosurfactant combination of methanol and a fatty acid which is partially neutralized by a nitrogenous base. In all aspects of U.S. Patent 5,004,479, methanol is the only alcohol present. Some U.S. Patents of

general background interest include:

4,406,519 and 4,451,265.

Other references of general background interest include:

J.J. Donnelly, Jr. and H.M. White, "Water and Alcohol Use in Automotive
5 Diesel Engines" DOE/DX/50286-4 published September 1985.

A.L. Compere et al., "Microemulsion Fuels: Development and Use" ORNL
TM-9603, published March 1985.

W.D. Weatherford, Jr. et al., AFLRL Reports 111, 13, 145, U.S. Army Fuels
and Lubricants Research Laboratory.

10 None of these patents, references, or articles teach or suggest the present
invention.

All patents, patent applications, articles, references, standards, etc. cited herein
are incorporated by reference in their entirety.

In spite of the present state of the art, a need still exists for improved
15 fuel/additive compositions which:

1. do improve combustion and reduce or eliminate smoke, particulates and
noxious gases;
2. do not damage engine or fuel system parts;
3. are usable with little or no retrofit of engine or fuel system parts;
- 20 4. are usable in varying proportions according to the requirements of
various applications;
5. meet federal EPA and state Air Resources Board standards; and
6. make use of renewable and readily available resources to partially or
fully replace fossil-based fuels.

25 The present invention provides such a range of improved compositions.

SUMMARY OF THE INVENTION

The present invention relates to an additive composition for a combustible fuel,
which is also used as a fuel composition, to utilize readily available and renewable
resources, to improve liquid combustible fuel properties, reduce undesirable elements such
30 as sulphur, aromatic hydrocarbons, and glycerine from the content of the fuel, produce
improved combustion, and to reduce visible smoke, particulates and other noxious
emissions production of the combusted fuel, which additive or fuel composition comprises:
a. one or more alcohols selected from the group consisting of water-soluble alcohols:

(i) having between about 1 and 2 carbon atoms, selected from the group consisting of methanol and ethanol in an anhydrous state or as a 0.5-36% aqueous solution by volume,

(ii) having between about 3 and 5 carbon atoms, selected from the group consisting of propanol, iso-propanol, butanol, and pentanol by volume or combinations of (a)(i) and (a)(ii); and

optionally one or more of the following:

b. one or more alcohols selected from the group consisting of:

(i) straight or branched chain, saturated or unsaturated alcohols, which are clear and liquid at room temperature, and having between about 6 and 12 carbon atoms, or

(ii) straight- or branched-chain, saturated or unsaturated long-chain fatty alcohols, which are solid at room temperature, having from between about 13 and 18 carbon atoms, or combinations of b(i) and (b)(ii);


c. one or more ethoxylated alcohols selected from the group consisting of alcohols having between 6 and 18 carbon atoms, where the ethylene oxide add-on is less than 5 moles (units);

d. a fatty acid of the structure $R-(C=O)-OH$, wherein R is selected from alkyl, alkenyl or alkynyl having between about 10 to 24 carbon atoms, with

e. a source of nitrogen in an anhydrous state or as an aqueous solution selected from the group consisting of the ammonia, hydrazine, alkyl hydrazine, dialkyl hydrazine, urea, ethanolamine, monoalkyl ethanolamine, and dialkyl ethanolamine wherein alkyl is independently selected from methyl, ethyl, n-propyl or isopropyl, wherein trialkylamines are excluded;

wherein components a and one or more of b, c, d, and e, when combined with mixing with combustible fuel form a clear, stable microemulsion having a viscosity similar to that of the liquid combustible fuel, and where the ratio of combustible fuel: additive ranges from about 99:1 to 0:100 by volume;

wherein said additive/fuel composition excludes ethylene glycol, glycerine, polyethylene, polypropylene, aromatic organic compounds, sulfur, sulfur compounds, metals, metal compounds, compounds of phenanthrene, and emulsifiers of the general formula:

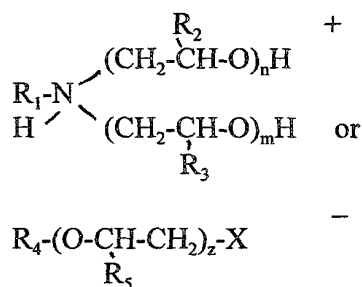

- 10 wherein R_1 and R_4 each independently is a saturated or unsaturated, straight-chain or branched hydrocarbon aliphatic radical each of 4 to 24 carbon atoms (e.g., alkyl or alkenyl) or R_4 is alkylphenyl of 1 to 18 carbon atoms in the optionally branched alkyl chain or H; R_2 , R_3 and R_5 each independently represent a methyl group or H, n plus m is an integer from 1 to 20; z is an integer from 0 to 15; and X is -COO(-) or $\text{-OCH}_2\text{COO(-)}$,
 15 wherein, substituents R_2 , R_3 and R_5 are the same or different in different monomer units of each chain, and optionally other organic diacids are excluded.

In another aspect, the present invention relates to an additive composition for a refined combustible fuel, such as gasoline, to utilize readily available and renewable resources, improve liquid fuel properties, and produce improved fuel performance and
 20 combustion, which additive/fuel comprises a composition, which additive/fuel comprises a composition of components:

- a) one or more alcohols selected from the group consisting of water-soluble alcohols having between about 1 and 2 carbon atoms as defined herein in (a)(i) in an anhydrous state or as a 0.5-5% aqueous solution;
- 25 b) one or more alcohols selected from the group consisting of water-soluble alcohols having between about 3 and 5 carbon atoms as defined herein in (a)(ii)

wherein components a and b, are present in a:b ratios from about 80:20 and 99:1, wherein components a and b, when combined with mixing with the refined combustible
 30 fuel, such as gasoline, form a clear stable solution or microemulsion having a viscosity similar to that of the liquid fossil fuel and where the ratio of combustible fuel: additive ranges from about 99:1 to 1:99.

In another aspect, the present invention relates to an additive composition for a refined combustible fuel, such as gasoline, to utilize readily available and renewable
 35 resources, improve liquid fuel properties, and produce improved fuel performance and

combustion, which additive/fuel comprises a composition, which additive/fuel comprises a composition of components:

- a) one or more alcohols selected from the group consisting of water-soluble alcohols having between about 1 and 2 carbon atoms as defined herein in a(i) in an anhydrous state or as a 0.5-5% aqueous solution; and preferably a 0.5-1% aqueous ethanol;
- b) one or more alcohols selected from the group consisting of water-soluble alcohols having between about 3 and 5 carbon atoms as defined herein in (a)(ii); and preferably iso-propanol:

wherein components a and b, are present in a:b ratios from about 80:20 and 99:1, and more preferably in a:b ratios range from 90:10 and 95:5 by volume wherein components a and b, when combined with mixing with the combustible fuel form a clear, stable microemulsion having a viscosity similar to that of the liquid combustible fuel, and where the ratio of combustible fuel; additive ranges from about 99:1 to 1:99 and more preferably between about 80:20 and 99:1, and more preferably between about 90:10 and 95:5 by volume.

In another aspect, the present invention relates to an additive composition for a combustible fuel to utilize readily available and renewable resources and produce improved fuel performance and combustion, which additive or fuel comprises a composition of components:

- a. one or more alcohols selected from the group consisting of water-soluble alcohols having between about 1 and 5 carbon atoms as defined herein in an anhydrous state or as a 0.5-20% aqueous solution;
- b. one or more alcohols selected from the group consisting of clear, liquid saturated or unsaturated, straight- or branched-chain, alcohols having between about 6 and 12 carbon atoms,

wherein components a and b, are present in a:b ratios ranging from about 3:1 and 1:3, wherein components a and b, when combined with mixing with combustible fuel form a clear, stable microemulsion having a viscosity similar to that of the liquid combustible fuel, and where the ratio of combustible fuel: additive ranges from about 99:1 to 1:99 by volume.

In another aspect, the present invention relates to an additive composition for a

combustible fuel to utilize readily available and renewable resources and produce improved fuel performance and combustion, which additive or fuel comprises a composition of components:

a. one or more alcohols selected from the group consisting of water-soluble alcohols having between about 1 and 5 carbon atoms as defined herein in an anhydrous state or as a 0.5-20% aqueous solution; more preferably an anhydrous or about 5% aqueous ethanol denatured with methanol and most preferably an anhydrous or about 5% aqueous ethanol denatured with iso-propanol, butanol or combinations thereof;

b. one or more alcohols selected from the group consisting of saturated or unsaturated, straight- or branched-chain alcohols having from between about 6 and 18 carbon atoms, more preferably between about 6 and 12 carbon atoms, and most preferably between about 8 and 10 carbon atoms; and

wherein components a and b, are present in a:b ratios ranging from about 3:1 by volume and 1:3, and more preferably in a:b ratios ranging from 3:1 and 1:1 by volume wherein components a and b, when combined with mixing with the combustible fuel form a clear, stable microemulsion having a viscosity similar to that of the liquid combustible fuel, and where the ratio of combustible fuel: additive ranges from about 99:1 to 1:99 and more preferably between about 80:20 and 99:1 and more preferably between about 90:10 and 95:5 by volume.

In another aspect, the present invention relates to an additive composition for a combustible fuel, to utilize readily available and renewable resources and produce improved fuel performance and combustion, which additive or fuel comprises a composition of components:

a. one or more alcohols selected from the group consisting of water-soluble alcohols having between about 1 and 5 carbon atoms as defined herein, in an anhydrous state or as a 0.5-20% aqueous solution; and

b. one or more alcohols selected from the group consisting of clear, liquid saturated or unsaturated, straight- or branched-chain alcohols having from between about 6 and 12 carbon atoms; and

c. one or more alcohols selected from the group consisting of ethoxylated alcohols having between about 6 and 18 carbon atoms, where the ethylene oxide add-on is less than 5 moles;

wherein components a, b, and c are present in a:b:c ratios ranging from about 4:1:1

and 1:4:4 by volume, wherein components a, b, and c when combined with mixing with the combustible fuel, form a clear, stable microemulsion having a viscosity similar to that of the liquid combustible fuel, and where the ratio of combustible fuel: additive ranges from about 99:1 to 1:99 by volume.

5 In another aspect, the present invention relates to an additive composition for a combustible fuel, to utilize readily available and renewable resources and produce improved fuel performance and combustion, which additive or fuel comprises a composition of components:

a. one or more alcohols selected from the group consisting of water-soluble
10 alcohols having between about 1 and 5 carbon atoms as defined herein in an anhydrous state or as a 0.5-20% aqueous solution; more preferably an anhydrous or 5-10% aqueous ethanol denatured with methanol and most preferably an anhydrous or 5-10% aqueous ethanol denatured with iso-propanol, butanol or combinations thereof;

b. one or more alcohols selected from the group consisting of saturated or
15 unsaturated, straight- or branched-chain alcohols having from between about 6 and 18 carbon atoms, more preferably between about 6 and 12 carbon atoms, and most preferably between about 8 and 10 carbon atoms; and

c. one or more alcohols selected from the group consisting of ethoxylated
20 alcohols having between about 6 and 18 carbon atoms, preferably between about 12 and 16 carbon atoms, where the ethylene oxide add-on is less than 5 moles and preferably 3 moles;

wherein components a, b, and c are present in a:b:c ratios ranging from about 4:1:1 and 1:4:4 by volume, and more preferably between about 4:1:1 and 4:2:1 by volume wherein components a, b, and c when combined with mixing with combustible fuel, form
25 a clear, stable microemulsion having a viscosity similar to that of the liquid fossil fuel, and where the ratio of combustible fuel:additive ranges from about 99:1 to 1:99 and more preferably between about 80:20 and 99:1, and most preferably between about 90:10 and 95:5 by volume.

In another aspect, the present invention relates to an additive composition for a
30 combustible fuel to utilize readily available and renewable resources and produce improved fuel performance and combustion, which additive or fuel comprises a composition of components:

a. one or more alcohols selected from the group consisting of water-soluble

alcohols having between about 1 and 5 carbon atoms as defined herein in an anhydrous state or as a 0.5 to 20% aqueous solution; and

- b. one or more alcohols selected from the group consisting of ethoxylated alcohols having between about 6 and 18 carbon atoms, where the ethylene oxide add-on is less than 5 moles;

wherein components a and b are present in a:b ratios ranging from between 3:1 and 1:2 by volume, wherein components a and b when combined with mixing with the combustible fuel form a clear, stable microemulsion having a viscosity similar to that of the liquid combustible fuel, and where the ratio of combustible fuel: additive ranges from about 99:1 to 1:99 by volume.

In another aspect, the present invention relates to an additive composition for a combustible fuel to utilize readily available and renewable resources and produce improved fuel performance and combustion, which additive or fuel comprises a composition of components:

- a. one or more alcohols selected from the group consisting of water-soluble alcohols having between about 1 and 5 carbon atoms as defined herein in an anhydrous state or as a 0.5-20% aqueous solution; more preferably an anhydrous or 5-10% aqueous ethanol denatured with methanol and most preferably an anhydrous or 5-10% aqueous ethanol denatured with iso-propanol butanol or combinations thereof;

- b. one or more alcohols selected from the group consisting of ethoxylated alcohols having between about 6 and 18 carbon atoms, preferably between about 12 and 16 carbon atoms, where the ethylene oxide add-on is less than 5 moles and preferably 3 moles;

wherein components a and b are present in a:b ratios ranging from 3:1 and 1:2 by volume, and more preferably between about 3:1 and 2:1 by volume, wherein components a and b when combined with mixing with the combustible fuel form a clear, stable microemulsion having a viscosity similar to that of the liquid combustible fuel, and where the ratio of combustible fuel: additive ranges from about 99:1 to 1:99, and more preferably between about 80:20 and 99:1 and more preferably between about 90:10 and 95:5 by volume.

In another aspect, the present invention relates to an additive composition for a combustible fuel to utilize readily available and renewable resources and produce improved fuel performance and combustion, which additive/fuel comprises a composition of

components:

a. one or more alcohols selected from the group consisting of water-soluble alcohols having between about 1 and 5 carbon atoms, such as mentanol, ethanol, propanol, iso-propanol, butanol, pentanol, in an anhydrous state or as a 0.5-36% aqueous solution;
5 and

b. one or more alcohols selected from the group consisting of saturated or unsaturated, straight-or-branched-chain alcohols having from between about 6 and 18 carbon atoms; and

c. a fatty acid of the structure $R-(C=O)-OH$, wherein R is selected from alkyl, alkenyl or alkynyl having from about 10 to 24 carbon atoms; and
10

d. a source of nitrogen in an anhydrous state or as a aqueous solution selected from the group consisting of the ammonia, hydrazine, alkyl hydrazine, dialkyl hydrazine, urea, ethanolamine, monoalkyl ethanolamine, dialky ethanolamine wherein alkyl is independently selected from methyl, ethyl, n-propyl or isopropyl wherein trialkylamines
15 are excluded;

wherein components a, b and c are present in a:b:c ratios ranging from about 4:1:1 and 1:4:4; wherein components a, b, c, and d when combined with mixing with said combustible fuel form a clear, stable microemulsion having a viscosity similar to a liquid fossil fuel, and where the ratio of combustible fuel: additive ranges from about 99:1 to 1:99

20 In another aspect, the present invention relates to an additive composition for a combustible fuel, to utilize readily available and renewable resources and produce improved fuel performance and combustion, which additive or fuel comprises a composition of components:

a. one or more alcohols selected from the group consisting of water-soluble
25 alcohols having between about 1 and 5 carbon atoms as defined herein in an anhydrous state or as a 0.5-20% aqueous solution; more preferably an anhydrous or 5 to 10% aqueous ethanol denatured with methanol and most preferably an anhydrous or 5 to 10% aqueous ethanol denatured with isopropanol, butanol or combinations thereof;

b. one or more alcohols selected from the group consisting of saturated or
30 unsaturated, straight- or branched-chain alcohols having from between about 6 and 18 carbon atoms, more preferably between about 6 and 12 carbon atoms, and most preferably between about 8 and 10 carbon atoms;

c. a fatty acid of the structure $R-(C=O)-OH$, wherein R is selected from alkyl,

alkenyl or alkynyl having from about 10 to 24 carbon atoms; and preferably saturated fatty acids, such as oleic acid and linoleic acid;

- d. a source of nitrogen in an anhydrous state or as an aqueous solution selected from the group consisting of the ammonia, hydrazine, alkyl hydrazine, dialkyl hydrazine, urea, ethanolamine, monoalkyl ethanolamine, and dialkyl ethanolamine wherein alkyl is independently selected from methyl, ethyl, n-propyl or iso-propyl, wherein trialkylamines are excluded; sufficient to neutralize between about 40 to 85 percent of the fatty acid of subpart c;

wherein components a, b, and c are present in a:b:c ratios ranging from about 4:1:1 and 1:4:4; and preferably between about 4:1:1 and 4:2:1 by volume, wherein components a, b, c and d when combined with mixing with said combustible fuel form a clear, stable microemulsion having a viscosity similar to that of the liquid combustible fuel, and where the ratio of combustible fuel: additive ranges from about 99:1 to 1:99, and more preferably between about 80:20 and 99:1 and most preferably between about 90:10 and 95:5 by volume.

In another aspect, the present invention relates to an additive composition for a combustible fuel to utilize readily available and renewable resources and produce improved fuel performance and combustion, which additive or fuel comprises a composition of components:

- a. one or more alcohols selected from the group consisting of water-soluble alcohols having between about 1 and 5 carbon atoms as defined herein in an anhydrous state or as a 0.5-36% aqueous solution; and
- b. one or more alcohols selected from the group consisting of ethoxylated alcohols having between 6 and 18 carbon atoms, where the ethylene oxide add-on is less than 5 moles; and
- c. a fatty acid of the structure $R-(C=O)-OH$, wherein R is selected from alkyl, alkenyl or alkynyl having from about 10 to 24 carbon atoms; and
- d. a source of nitrogen in an anhydrous state or as an aqueous solution selected from the group consisting of the ammonia, hydrazine, alkyl hydrazine, dialkyl hydrazine, urea, ethanolamine, monoalkyl ethanolamine, and dialkyl ethanolamine wherein alkyl is independently selected from methyl, ethyl, n-propyl or isopropyl, wherein trialkylamines are excluded,

wherein components a, b, and c are present in a:b:c ratios ranging from about 5:1:1

and 1:4:4 by volume; wherein components a, b, c, and d when combined with mixing with the combustible fuel, form a clear, stable microemulsion having a viscosity similar to that of the liquid combustible fuel, and where the ratio of combustible fuel: additive ranges from about 99:1 to 1:99 by volume.

5 In another aspect, the present invention relates to an additive composition for a combustible fuel, to utilize readily available and renewable resources and produce improved fuel performance and combustion, which additive or fuel comprises a composition of components:

a. one or more alcohols selected from the group consisting of water-soluble
10 alcohols having between about 1 and 5 carbon atoms as defined herein in an anhydrous state or as a 0.5-20% aqueous solution; more preferably an anhydrous or 5 to 10% aqueous ethanol denatured with methanol and most preferably an anhydrous or 5 to 10% aqueous ethanol denatured with iso-propanol, butanol or combinations thereof;

b. one or more alcohols selected from the group consisting of ethoxylated
15 alcohols having between about 6 and 18 carbon atoms, preferably between about 12 and 16 carbon atoms, where the ethylene oxide add-on is less than 5 moles and preferably 3 moles;

c. a fatty acid of the structure $R-(C=O)-OH$, wherein R is selected from alkyl, alkenyl or alkynyl having from about 10 to 24 carbon atoms, and preferably oleic acid or
20 linoleic acid;

d. a source of nitrogen in an anhydrous state or as an aqueous solution selected from the group consisting of the ammonia, hydrazine, alkyl hydrazine, dialkyl hydrazine, urea, ethanolamine, monoalkyl ethanolamine, and dialkyl ethanolamine wherein alkyl is independently selected from methyl, ethyl, n-propyl or isopropyl wherein trialkylamines
25 are excluded, sufficient to neutralize between about 40 to 85 percent of the fatty acid of subpart c;

wherein components a, b, and c are present in a:b:c ratios ranging from about 4:1:1 and 1:4:4; and preferably between about 4:1:1 and 3:1:1 by volume, wherein components a, b, c, and d when combined with mixing with the combustible fuel form a clear, stable
30 microemulsion having a viscosity similar to that of the liquid combustible fuel, and where the ratio of combustible fuel: additive ranges from about 99:1 to 1:99, and more preferably between about 80:20 and 99:1 and most preferably between about 90:10 and 95:5 by volume.

In another aspect, the present invention relates to an additive composition for a combustible fuel, to utilize readily available and renewable resources and produce improved fuel performance and combustion, which additive or fuel comprises a composition of components:

- 5 a. one or more alcohols selected from the group consisting of water-soluble alcohols having between about 1 and 5 carbon atoms as defined herein in an anhydrous state or as a 0.5-36% aqueous solution; and
- b. one or more alcohols selected from the group consisting of clear, liquid saturated or unsaturated, straight- or branched-chain alcohols having from between about
10 6 and 12 carbon atoms; and
- c. one or more ethoxylated alcohols selected from the group consisting of alcohols having between 6 and 18 carbon atoms, where the ethylene oxide add-on is less than 5 moles; and
- d. a fatty acid of the structure $R-(C=O)-OH$, wherein R is selected from alkyl,
15 alkenyl or alkynyl having from about 10 to 24 carbon atoms; and
- e. a source of nitrogen in an anhydrous state or as an aqueous solution selected from the group consisting of the ammonia, hydrazine, alkyl hydrazine, dialkyl hydrazine, urea, ethanolamine, monoalkyl ethanolamine, and dialkyl ethanolamine, wherein alkyl is independently selected from methyl, ethyl, n-propyl or isopropyl, wherein trialkylamines
20 are excluded;

wherein components a, b, c, and d are present in a:b:c:d ratios ranging from about 6:1:1:1 and 1:4:4:4 by volume; wherein components a, b, c, d, and e when combined with mixing with the combustible fuel form a clear, stable microemulsion having a viscosity similar to that of the liquid combustible fuel, and where the ratio of combustible fuel:
25 additive ranges from about 99:1 to 1:99 by volume.

In another aspect, the present invention relates to an additive composition for a combustible fuel, to utilize readily available and renewable resources and produce improved fuel performance and combustion, which additive or fuel comprises a composition of components:

- 30 a. one or more alcohols selected from the group consisting of water-soluble alcohols having between about 1 and 5 carbon atoms as defined herein in an anhydrous state or as a 0.5-20% aqueous solution; more preferably an anhydrous or 5 to 10% aqueous ethanol denatured with methanol and most preferably an anhydrous or 5 to 10% aqueous

ethanol denatured with iso-propanol, butanol or combinations thereof;

b. one or more alcohols selected from the group consisting of saturated or unsaturated, straight- or branched-chain alcohols having from between about 6 and 18 carbon atoms, more preferably between about 6 and 12 carbon atoms, and most preferably
5 between about 8 and 10 carbon atoms; and

c. one or more alcohols selected from the group consisting of ethoxylated alcohols having between about 6 and 18 carbon atoms, preferably between about 12 and 16 carbon atoms, where the ethylene oxide add-on is less than 5 moles and preferably 3 moles;

10 d. a fatty acid of the structure $R-(C=O)-OH$, wherein R is selected from alkyl, alkenyl or alkynyl having from about 10 to 24 carbon atom; and preferably oleic acid and linoleic acid;

e. a source of nitrogen in an anhydrous state or as an aqueous solution selected from the group consisting of the ammonia, hydrazine, alkyl hydrazine, dialkyl hydrazine,
15 urea, ethanolamine, monoalkyl ethanolamine, and dialkyl ethanolamine wherein alkyl is independently selected from methyl, ethyl, n-propyl or isopropyl, wherein trialkylamines are excluded, sufficient to neutralize between about 40 to 85 percent of the fatty acid of subpart c;

wherein components a, b, c, and d are present in a:b:c:d ratios ranging from about
20 6:1:1:1 and 1:4:4:4; and preferably between about 6:1:1:1 and 6:3:1:1 by volume, wherein components a, b, c, d, and e when combined with mixing with the combustible fuel form a clear, stable microemulsion having a viscosity similar to that of the liquid combustible fuel, and where the ratio of combustible fuel:additive ranges from about 99:1 to 1:99, and more preferably between about 80:20 and 99:1 and more preferably between about 90:10
25 and 95:5 by volume.

Additional embodiments are found below in the DETAILED DESCRIPTION OF THE INVENTION.

BRIEF DESCRIPTION OF THE DRAWINGS

Figures 1-6 show visible emissions from exhaust stacks as Stockton East Water
30 District, Stockton, CA.

Figure 1 is a photographic representation of the Caterpillar engine used at Stockton East Water District, Stockton, CA.

Figure 2 is a photograph of the containers of the additive blends.

Figure 3 is a photograph of the normal emissions of a diesel engine in start-up mode using CA#2 Diesel fuel.

Figure 4 is a photograph of the emissions of a diesel engine in start-up mode using the fuel additive blend of Example 1.

Figure 5 is a photograph of the emissions of a diesel engine normal running speed, using CA#2 Diesel fuel after 30 minutes or more.

Figure 6 is a photograph of the emissions of a diesel engine (far right smoke stack), normal running speed, using the fuel additive blend of Example 1.

Figures 7-18 show test procedure and 1-minute filter samples showing particulate reductions at Stockton East Water District.

Figure 7 is a photograph of the muffler and exhaust pipe from the diesel engine in Figure 1C, engine start-up mode using CA#2 diesel, showing method for collecting filter samples.

Figure 8 is a photograph of the muffler and exhaust pipe from the diesel engine in Figure 1, engine start-up mode using the fuel additive blend of Example 2 showing method for collecting filter samples.

Figure 9 is a photograph of the muffler and exhaust pipe from the diesel engine in Figure 1C, engine running mode, using the fuel additive blend of Example 2.

Figure 10 is a photograph of the muffler and exhaust pipe from the diesel engine in Figure 1, engine running mode, using the fuel additive blend of Example 2.

Figure 11 is a photograph showing on the left the filter sample 110A for engine running mode using CA#2 Diesel, and on the right of the photograph is the filter sample 110B after 10 min engine-running mode using the fuel additive blend of Example 2.

Figure 12 is a photograph showing on the left the filter sample 120A for engine running mode using CA#2 Diesel and on the right is the filter sample 120B after 30 min engine-running mode using the fuel additive blend of Example 2.

Figure 13 is a photograph showing on the left the filter sample 130A for engine running mode using CA#2 diesel and on the right is the filter sample 130B after 1 hr engine running mode using the fuel additive blend of Example 2.

Figure 14 is a photograph showing on the left the filter sample 140A for engine running mode using CA#2 Diesel and on the right the filter sample 140B after 10 min

engine-running mode using CA#2 Diesel, after 1hr use of the fuel additive blend of Example 2.

Figure 15 is a photograph showing on the left the filter sample 150A for engine startup mode using CA#2 Diesel and on the right the filter sample 150B for engine start-up mode using the fuel additive blend of Example 1 after 10 min use of the fuel additive blend.

Figure 16 is a photograph showing on the left the filter sample 160A for engine startup mode using CA#2, and on the right the filter sample 160B for engine start-up mode using the fuel additive blend of Example 1 after 1 hr use of the fuel additive blend.

Figure 17 is a photograph showing on the left the filter sample 170A for engine startup mode using CA#2 Diesel and on the right the filter sample 170B for engine start-up mode using CA#2 Diesel - after 1 hr use of the fuel additive blend.

Figure 18 is a photograph showing a comparison of all filter samples wherein filter sample 110A (is the same as 120A and 140A) as compared with 110B, 120B, and 140B, and filter sample 150A (is the same as 160A and 170A) as compared to 150B, 160B and 170B

Figure 19 is a photograph showing a comparison of filter samples from Example 4 wherein:

- 190A shows particulates from Test Cycle 1, Standard CA #2 Diesel fuel;
 - 190B shows particulates from Test Cycle 2, Fuel/Additive Composition #1;
 - 190C shows particulates from Test Cycle 3, Fuel/Additive Composition #2;
 - 190D shows particulates from Test Cycle 4, Fuel/Additive Composition #3;
 - 190E shows particulates from Test Cycle 5, Fuel/Additive Composition #4;
 - 190F shows particulates from Test Cycle 6, Standard CA #2 Diesel fuel; and
- where 190F shows some alteration of the filter sample due to reflection of the plastic filter casing.

DETAILED DESCRIPTION OF THE INVENTION
AND PREFERRED EMBODIMENTS

Definitions:

As used herein:

5 “Co-solvent alcohol” refers to water-soluble alcohol such as methanol, ethanol, propanol, butanol, pentanol or hexanol. Methanol and/or ethanol are preferred. Anhydrous or 5% aqueous ethanol with methanol 1-10% is more preferred, and anhydrous or 5% aqueous ethanol denatured with isopropanol or butanol about 1-10% by volume is especially preferred.

10 “Ethoxylated alcohols” refer to long-chain fatty alcohols having from between about 12 to 18 carbon atoms, which have an ethylene oxide add-on of less than 5 moles. C12 through C16 fatty alcohols with an ethylene oxide add-on of less than five are preferred, and C12 through C16 fatty alcohols with an ethylene oxide add-on of 3 is most preferred. “Fatty acid” refers to alkyl, alkenyl and alkynyl acids having about 10 to 24
15 carbon atoms, and preferably about 10 to 18 carbon atoms. Linoleic and oleic acids are preferred.

 “Fuel” refers to conventional liquid fuel used in burning (usually to produce power, but also to produce heat) and in various internal combustion engines. Liquid fuels include but are not limited to fossil derived fuels such as diesel fuel, heating oil, jet fuel, kerosene,
20 coal slurry, gasoline, combinations thereof and the like. Distilled liquids derived from renewable resources such as vegetable oils optionally are useful as a combustible fuel. These include but are not limited to oils from soybeans, tall, safflower, sunflower, linseed, cottonseed, corn, rapeseed and the like. Diesel fuel is preferred.

 “Liquid fuel hydrocarbons” refers to hydrocarbons which form the continuous
25 phase are mixtures of hydrocarbons, such as those refined (distilled) from fossil fuel, including crude petroleum or coal. Coal slurries (liquids) are part of the present hydrocarbon fuel. Diesel fuel hydrocarbons are preferred, however, it is recognized that the invention includes any distilled liquid fuel which forms a microemulsion with the additive, such as jet fuel, fuel oil, gasoline, and the like.

30 “Surfactant portion” refers to those components that generally contribute to reducing surface tension of the water and oil phases, allowing a microemulsion to form. In the present invention, these components are some water-soluble alcohols, water-

insoluble alcohols, ethoxylated alcohols, and fatty acids partially neutralized with a nitrogen base.

“Viscosity similar to a liquid fossil fuel” refers to the change in viscosity that occurs when the additive of the present invention is mixed with a liquid fossil fuel. The viscosity of the additive/fuel is within $\pm 10\%$, preferably within $\pm 5\%$ and more preferably between about $\pm 2\%$ of the original viscosity of the fuel.

“Volatile source of basic nitrogen” refers to nitrogen compounds that, when in the presence of fatty acids produce an exothermic reaction, partially neutralizing the fatty acids, forming ammonium salts and creating an anionic surfactant. Sodium and potassium compounds will also create an anionic surfactant through partial neutralization of fatty acids, but do not fall within the EPA CHON classification, and are metal elements that cannot be used in fuel additives because they form toxic metal contaminants during combustion. Aqueous ammonia, or urea dissolved in water or ethanol, are preferred, and BAUM A 26° aqueous ammonia is most preferred.

“Water-insoluble alcohol” refers to those alkyl, alkenyl or alkynyl alcohols (all isomers) having 6 to 12 carbon atoms and a water solubility of less than about 1 g/100 ml at 20°C. Alkyl alcohols between about 6 and 18 carbon atoms are preferred, and those having between 6 to 12 carbon atoms are more preferred. Most preferred alkyl alcohols are normal alcohols having 8 to 10 carbon atoms. Octanol is especially preferred.

“Water-soluble portion” refers to those components that generally contribute to fuel oxygenation and have characteristic solvent or detergent qualities that contribute to cleaner burning. In the present invention, these components are water-soluble alcohols (all isomers) and water.

Additional aspects of the invention follow and include;

In another aspect, the present invention relates to an additive composition for a combustible fuel, to utilize readily available and renewable resources and produce improved fuel performance and combustion, which additive or fuel comprises a composition of components:

a. one or more alcohols selected from the group consisting of water-soluble alcohols having between about 1 and 5 carbon atoms as defined herein in an anhydrous state or as a 0.5-36% aqueous solution; and one or more of the following:

b. one or more alcohols selected from the group consisting of saturated or

unsaturated, straight- or branched-chain alcohols having from between about 6 and 18 carbon atoms, or between about 6 and 12 carbon atoms, or between about 8 and 10 carbon atoms;

c. one or more ethoxylated alcohols selected from the group consisting of
5 alcohols having between 6 and 18 carbon atoms, where the ethylene oxide add-on is less than 5 moles;

d. a fatty acid of the structure $R-(C=O)-OH$, wherein R is selected from alkyl, alkenyl or alkynyl having from about 10 to 24 carbon atoms with

e. a source of nitrogen in an anhydrous state or as an aqueous solution selected
10 from the group consisting of the ammonia, hydrazine, alkyl hydrazine, dialkyl hydrazine, urea, ethanolamine, monoalkyl ethanolamine, and dialkyl ethanolamine wherein alkyl is independently selected from methyl, ethyl, n-propyl or isopropyl, wherein trialkylamines are excluded;

wherein components a and one or more of b, c, d, and e, when combined with
15 mixing with the combustible fuel form a clear, stable microemulsion having a viscosity similar to the liquid combustible fuel, and where the ratio of combustible fuel: additive ranges from about 95:5 to 99:1 by volume.

In another aspect, the present invention relates to an additive composition for a combustible fuel, to utilize readily available and renewable resources and produce
20 improved fuel performance and combustion, which additive or fuel comprises a composition of components:

a. one or more alcohols selected from the group consisting of water-soluble alcohols having between about 1 and 5 carbon atoms as defined herein in an anhydrous state or as a 0.5-36% aqueous solution; and one or more of the following:

25 b. one or more alcohols selected from the group consisting of saturated or unsaturated, straight- or branched-chain alcohols having from between about 6 and 18 carbon atoms, or between about 6 and 12 carbon atoms, or between about 8 and 10 carbon atoms;

c. one or more ethoxylated alcohols selected from the group consisting of
30 alcohols having between 6 and 18 carbon atoms, ethylene oxide add-on is less than 5 moles;

d. a fatty acid of the structure $R-(C=O)-OH$, wherein R is selected from alkyl, alkenyl or alkynyl having from about 10 to 24 carbon atoms, with

0936934 0119
66710 7282260

e. a source of nitrogen in an anhydrous state or as an aqueous solution selected from the group consisting of the ammonia, hydrazine, alkyl hydrazine, dialkyl hydrazine, urea, ethanolamine, monoalkyl ethanolamine, and dialkyl ethanolamine wherein alkyl is independently selected from methyl, ethyl, n-propyl or isopropyl, wherein trialkylamines
5 are excluded;

wherein components a and one or more of b, c, d, and e, when combined with mixing with the combustible fuel form a clear, stable microemulsion having a viscosity similar to the liquid combustible fuel, and where the ratio of combustible fuel: additive ranges from about 90:10 to 99:1 by volume.

10 In another aspect, the present invention relates to an additive composition for a combustible fuel, to utilize readily available and renewable resources and produce improved fuel performance and combustion, which additive or fuel comprises a composition of components:

a. one or more alcohols selected from the group consisting of water-soluble
15 alcohols having between about 1 and 5 carbon atoms as defined herein in an anhydrous state or as a 0.5-36% aqueous solution, and one or more of the following:

b. one or more alcohols selected from the group consisting of saturated or unsaturated, straight- or branched-chain alcohols having from between about 6 and 18 carbon atoms, or between about 6 and 12 carbon atoms, or between about 8 and 10 carbon
20 atoms;

c. one or more ethoxylated alcohols selected from the group consisting of alcohols having between 6 and 18 carbon atoms, where the ethylene oxide add-on is less than 5 moles;

d. a fatty acid of the structure $R-(C=O)-OH$, wherein R is selected from alkyl, alkenyl or alkynyl having from about 10 to 24 carbon atoms, with
25

e. a source of nitrogen in an anhydrous state or as an aqueous solution selected from the group consisting of the ammonia, hydrazine, alkyl hydrazine, dialkyl hydrazine, urea, ethanolamine, monoalkyl ethanolamine, and dialkyl ethanolamine wherein alkyl is independently selected from methyl, ethyl, n-propyl or isopropyl wherein trialkylamines
30 are excluded;

wherein components a and one or more of b, c, d and e, when combined with mixing with the combustible fuel form a clear, stable microemulsion having a viscosity similar to that of the liquid combustible fuel, and where the ratio of combustible fuel:

additive ranges from about 80:20 to 99:1 by volume.

In another aspect, the present invention relates to an additive composition for a combustible fuel, to utilize readily available and renewable resources and produce improved fuel performance and combustion, which additive or fuel comprises a composition of components:

- a. one or more alcohols selected from the group consisting of water-soluble alcohols having between about 1 and 5 carbon atoms as defined herein in an anhydrous state or as a 0.5-36% aqueous solution; and one or more of the following:
- b. one or more alcohols selected from the group consisting of saturated or unsaturated, straight- or branched-chain alcohols having from between about 6 and 18 carbon atoms, or preferably between about 6 and 12 carbon atoms, or more preferably between about 8 and 10 carbon atoms;
- c. one or more ethoxylated alcohols selected from the group consisting of alcohols having between 6 and 18 carbon atoms, where the ethylene oxide add-on is less than 5 moles;
- d. a fatty acid of the structure $R-(C=O)-OH$, wherein R is selected from alkyl, alkenyl or alkynyl having from about 10 to 24 carbon atoms with
- e. a source of nitrogen in an anhydrous state or as an aqueous solution selected from the group consisting of the ammonia, hydrazine, alkyl hydrazine, dialkyl hydrazine, urea, ethanolamine, monoalkyl ethanolamine, and dialkyl ethanolamine wherein alkyl is independently selected from methyl, ethyl, n-propyl or isopropyl wherein trialkylamines are excluded;

wherein components a and one or more of b, c, d and e, when combined with mixing with the combustible fuel form a clear, stable microemulsion having a viscosity similar to that of the liquid combustible fuel, and where the ratio of combustible fuel: additive ranges from about 60:40 to 99:1 by volume.

In another aspect, the present invention relates to an additive composition for a combustible fuel, to utilize readily available and renewable resources and produce improved fuel performance and combustion, which additive or fuel comprises a composition of components:

- a. one or more alcohols selected from the group consisting of water-soluble alcohols having between about 1 and 5 carbon atoms as defined herein in an anhydrous state or as a 0.5-36% aqueous solution; and one or more of the following:

- b. one or more alcohols selected from the group consisting of saturated or unsaturated, straight- or branched-chain alcohols having from between about 6 and 18 carbon atoms, or preferably between about 6 and 12 carbon atoms, or more preferably between about 8 and 10 carbon atoms;
- 5 c. one or more ethoxylated alcohols selected from the group consisting of alcohols having between 6 and 18 carbon atoms, where the ethylene oxide add-on is less than 5 moles;
- d. a fatty acid of the structure $R-(C=O)-OH$, wherein R is selected from alkyl, alkenyl or alkynyl having from about 10 to 24 carbon atoms, with
- 10 e. a source of nitrogen in an anhydrous state or as an aqueous solution selected from the group consisting of the ammonia, hydrazine, alkyl hydrazine, dialkyl hydrazine, urea, ethanolamine, monoalkyl ethanolamine, and dialkyl ethanolamine wherein alkyl is independently selected from methyl, ethyl, n-propyl or isopropyl, wherein trialkylamines are excluded;
- 15 wherein components a and one or more of b, c, d, and e, when combined with mixing with the combustible fuel form a clear, stable microemulsion having a viscosity similar to the liquid combustible fuel, and where the ratio of combustible fuel: additive ranges from about 50:50 to 99:1 by volume.

In another aspect, the present invention relates to an additive composition for a
20 combustible fuel, to utilize readily available and renewable resources and produce improved fuel performance and combustion, which additive or fuel comprises a composition of components:

- a. one or more alcohols selected from the group consisting of water-soluble alcohols having between about 1 and 5 carbon atoms as defined herein in an anhydrous
25 state or as a 0.5-36% aqueous solution; and one or more of the following:
- b. one or more alcohols selected from the group consisting of saturated or unsaturated, straight- or branched-chain alcohols having from between about 6 and 18 carbon atoms, or between about 6 and 12 carbon atoms, or between about 8 and 10 carbon atoms;
- 30 c. one or more ethoxylated alcohols selected from the group consisting of alcohols having between 6 and 18 carbon atoms, where the ethylene oxide add-on is less than 5 moles;
- d. a fatty acid of the structure $R-(C=O)-OH$, wherein R is selected from alkyl,

alkenyl or alkynyl having from about 10 to 24 carbon atoms, with

- e. a source of nitrogen in an anhydrous state or as an aqueous solution selected from the group consisting of the ammonia, hydrazine, alkyl hydrazine, dialkyl hydrazine, urea, ethanolamine, monoalkyl ethanolamine, and dialkyl ethanolamine wherein alkyl is independently selected from methyl, ethyl, n-propyl or isopropyl wherein trialkylamines are excluded;

wherein components a and one or more of b, c, d and e, when combined with mixing with the combustible fuel form a clear, stable microemulsion having a viscosity similar to the liquid combustible fuel, and where the ratio of combustible fuel: additive ranges from about 1:99 to 50:50 by volume.

In another aspect, the present invention relates to an additive composition for a combustible fuel, to utilize readily available and renewable resources and produce improved fuel performance and combustion, which additive/fuel comprises a composition of components:

- a. one or more alcohols selected from the group consisting of water-soluble alcohols having between about 1 and 5 carbon atoms as defined herein in an anhydrous state or as a 0.5-36% aqueous solution; and one or more of the following:

- b. one or more alcohols selected from the group consisting of saturated or unsaturated, straight- or branched-chain alcohols having from between about 6 and 18 carbon atoms, or preferably between about 6 and 12 carbon atoms, or more preferably between about 8 and 10 carbon atoms;

- c. one or more ethoxylated alcohols selected from the group consisting of alcohols having between 6 and 18 carbon atoms, where the ethylene oxide add-on is less than 5 moles;

- d. a fatty acid of the structure $R-(C=O)-OH$, wherein R is selected from alkyl, alkenyl or alkynyl having from about 10 to 24 carbon atoms, with

- e. a source of nitrogen in an anhydrous state or as an aqueous solution selected from the group consisting of the ammonia, hydrazine, alkyl hydrazine, dialkyl hydrazine, urea, ethanolamine, monoalkyl ethanolamine, and dialkyl ethanolamine wherein alkyl is independently selected from methyl, ethyl, n-propyl or isopropyl wherein trialkylamines are excluded;

wherein the combustible fuel is any conventional or synthetic combustible fuel.

In another aspect, the present invention relates to an additive composition for a

combustible fuel, to utilize readily available and renewable resources and produce improved fuel performance and combustion, which additive or fuel comprises a composition of components:

a. one or more alcohols selected from the group consisting of water-soluble alcohols having between about 1 and 5 carbon atoms as defined herein in an anhydrous state or as a 0.5-36% aqueous solution; and one or more of the following:

b. one or more alcohols selected from the group consisting of saturated or unsaturated, straight- or branched-chain alcohols having from between about 6 and 18 carbon atoms, or preferably between about 6 and 12 carbon atoms, or more preferably between about 8 and 10 carbon atoms;

c. one or more ethoxylated alcohols selected from the group consisting of alcohols having between 6 and 18 carbon atoms, where the ethylene oxide add-on is less than 5 moles;

d. a fatty acid of the structure $R-(C=O)-OH$, wherein R is selected from alkyl, alkenyl or alkynyl having from about 10 to 24 carbon atoms, with

e. a source of nitrogen in an anhydrous state or as an aqueous solution selected from the group consisting of the ammonia, hydrazine, alkyl hydrazine, dialkyl hydrazine, urea, ethanolamine, monoalkyl ethanolamine, and dialkyl ethanolamine wherein alkyl is independently selected from methyl, ethyl, n-propyl or isopropyl, wherein trialkylamines are excluded;

wherein the combustible fuel is a fossil fuel such oil, jet fuel, kerosene, other distillate fuels, coal as Diesel fuel, heating slurry, gasoline or combinations thereof.

In another aspect, the present invention relates to an additive composition for a combustible fuel, to utilize readily available and renewable resources and produce improved fuel performance and combustion, which additive or fuel comprises a composition of components:

a. one or more alcohols selected from the group consisting of water-soluble alcohols having between about 1 and 5 carbon atoms as defined herein in an anhydrous state or as a 0.5-36% aqueous solution; and one or more of the following:

b. one or more alcohols selected from the group consisting of saturated or unsaturated, straight- or branched-chain alcohols having from between about 6 and 18 carbon atoms, or between about 6 and 12 carbon atoms, or between about 8 and 10 carbon atoms;

c. one or more ethoxylated alcohols selected from the group consisting of alcohols having between 6 and 18 carbon atoms, where the ethylene oxide add-on is less than 5 moles;

d. a fatty acid of the structure $R-(C=O)-OH$, wherein R is selected from alkyl, alkenyl or alkynyl having from about 10 to 24 carbon atoms, with

e. a source of nitrogen in an anhydrous state or as an aqueous solution selected from the group consisting of the ammonia, hydrazine, alkyl hydrazine, dialkyl hydrazine, urea, ethanolamine, monoalkyl ethanolamine, and dialkyl ethanolamine wherein alkyl is independently selected from methyl, ethyl, n-propyl or isopropyl, wherein trialkylamines are excluded;

wherein the combustible fuel is a renewable oil, such as triglycerides from any feedstock, esterification products, waste vegetable oils, tallow, tall oils or combinations thereof.

In another aspect, the present invention relates to an additive composition for a combustible fuel, to utilize readily available and renewable resources and produce improved fuel performance and combustion, which additive or fuel comprises a composition of components:

a. one or more alcohols selected from the group consisting of water-soluble alcohols having between about 1 and 5 carbon atoms as defined herein in an anhydrous state or as a 0.5-36% aqueous solution; and one or more of the following:

b. one or more alcohols selected from the group consisting of saturated or unsaturated, straight- or branched-chain alcohols having from between about 6 and 18 carbon atoms, or between about 6 and 12 carbon atoms, or between about 8 and 10 carbon atoms;

c. one or more ethoxylated alcohols selected from the group consisting of alcohols having between 6 and 18 carbon atoms, where the ethylene oxide add-on is less than 5 moles;

d. a fatty acid of the structure $R-(C=O)-OH$, wherein R is selected from alkyl, alkenyl or alkynyl having from about 10 to 24 carbon atoms, with

e. a source of nitrogen in an anhydrous state or as an aqueous solution selected from the group consisting of the ammonia, hydrazine, alkyl hydrazine, dialkyl hydrazine, urea, ethanolamine, monoalkyl ethanolamine, and dialkyl ethanolamine wherein alkyl is independently selected from methyl, ethyl, n-propyl or isopropyl, wherein trialkylamines

are excluded;

wherein the combustible fuel is other alcohols, such as water-insoluble alcohols which are clear liquid at room temperature, having between about 6 and 12 carbon atoms, and long-chain saturated fatty alcohols which are solid at room (ambient) temperature,
5 having between about 13 and 18 carbon atoms.

In another aspect, the present invention relates to an additive composition for a combustible fuel, which may also be used as a fuel composition, to utilize readily available and renewable resources and produce improved fuel performance and combustion, which fuel comprises a composition of components:

10 a. one or more alcohols selected from the group consisting of water-soluble alcohols having between about 1 and 5 carbon atoms as defined herein in an anhydrous state or as a 0.5-36% aqueous solution; and one or more of the following:

b. one or more alcohols selected from the group consisting of saturated or unsaturated, straight- or branched-chain alcohols having from between about 6 and 18
15 carbon atoms, or between about 6 and 12 carbon atoms, or between about 8 and 10 carbon atoms;

c. one or more ethoxylated alcohols selected from the group consisting of alcohols having between 6 and 18 carbon atoms, where the ethylene oxide add-on is less than 5 moles;

20 d. a fatty acid of the structure $R-(C=O)-OH$, wherein R is selected from alkyl, alkenyl or alkynyl having from about 10 to 24 carbon atoms, with

e. a source of nitrogen in an anhydrous state or as an aqueous solution selected from the group consisting of the ammonia, hydrazine, alkyl hydrazine, dialkyl hydrazine, urea, ethanolamine, monoalkyl ethanolamine, and dialkyl ethanolamine wherein alkyl is
25 independently selected from methyl ethyl n-propyl or isopropyl, wherein trialkylamines are excluded;

wherein the above composition comprises the total combustible fuel and the ratio of the other combustible fuels: above composition is 0:100.

ASPECT FOR CO-SURFACTANTS AND CO-SOLVENTS

30


In another aspect, the present invention relates to an additive composition for a combustible fuel to produce improved combustion and reduced smoke and particulate production of the combusted fuel, which additive composition comprises:

- a. a fatty acid of the structure $R-(C=O)-OH$, wherein R is selected from alkyl, alkenyl or alkynyl having from about 10 to 24 carbon atoms;
- b. at least one cosurfactant selected from the group consisting of clear liquid alcohols having from between about 6 and 12 carbon atoms;
- 5 c. at least one cosolvent as a water soluble alcohol selected from the group consisting of methanol, ethanol, propanol, butanol and pentanol;
- d. optionally water; and
- e. a source of nitrogen in an anhydrous state or as any aqueous solution selected from the group consisting of the ammonia, hydrazine, alkyl hydrazine, dialkyl
- 10 hydrazine, ethanolamine, monoalkyl ethanolamine, and dialkyl ethanolamine wherein alkyl is independently selected from methyl, ethyl, n-propyl or isopropyl, wherein trialkylamines are excluded;

wherein components a to e when combined with mixing with said combustible fuel form a clear stable micro-emulsion having a viscosity similar to that of the liquid

15 combustible fuel,

wherein the additive composition optionally excludes ethylene glycol, glycerine, polyethylene, polypropylene, aromatic organic compounds, sulfur, sulfur compounds, metals, metal compounds, compounds of phenanthrene, or emulsifiers of the general formula:

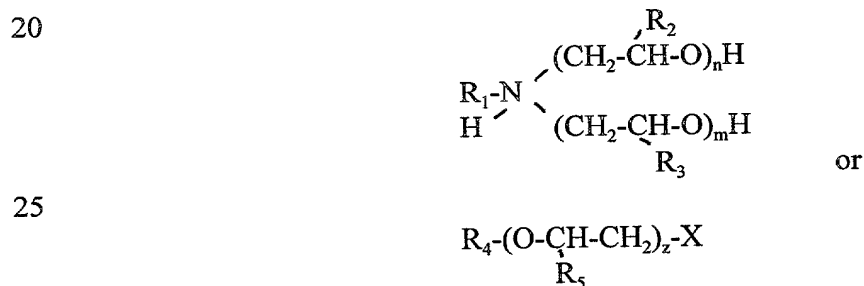

wherein R_1 and R_4 each independently is a saturated or unsaturated, straight-

30 chain or branched hydrocarbon aliphatic radical each of 4 to 24 C atoms (e.g., alkyl or alkenyl) or R_4 is alkylphenyl of 1 to 18 C atoms in the optionally branched alkyl chain or H; R_2 , R_3 and R_5 each independently represent a methyl group or H, n plus m is a number from 1 to 20; z is a number from 0 to 15; and X is $-\text{COO}(-)$ or $-\text{OCH}_2\text{COO}(-)$, wherein, substituents R_2 , R_3 and R_5 is the same or different in different monomer units

35 of each chain, and optionally other organic diacids are excluded.


ASPECT BY PARTS

In another aspect, the present invention relates to an additive composition for a combustible fuel to produce improved combustion and reduced smoke and particulate production of the fuel, which additive comprises a composition of components:

- 5 a. a fatty acid of the structure $R-(C=O)-OH$, where R is selected from alkyl, alkenyl or alkynyl having from about 10 to 24 carbon atoms is present in between about 15 and 60 parts by volume;
- b. a clear water-insoluble liquid alcohol having from between about 6 and 12 carbon atoms present in between about 5 to 30 parts by volume;
- 10 c. water soluble alcohol selected from methanol or ethanol which in between about 8 to 40 parts by volume;
- d. ammonia sufficient to neutralize between about 40 to 70 by volume the fatty acid of subpart a; and
- e. water which is present in between about 2 and 22 parts by volume;
- 15 wherein components a to e when combined with mixing with a liquid fuel form a clear stable microemulsion,

wherein the additive composition optionally excludes ethylene glycol, glycerine, polyethylene, polypropylene, aromatic organic compounds, sulfur, sulfur compounds, metals, metal compounds, compounds of phenanthrene, and emulsifiers of the general

20 formula:

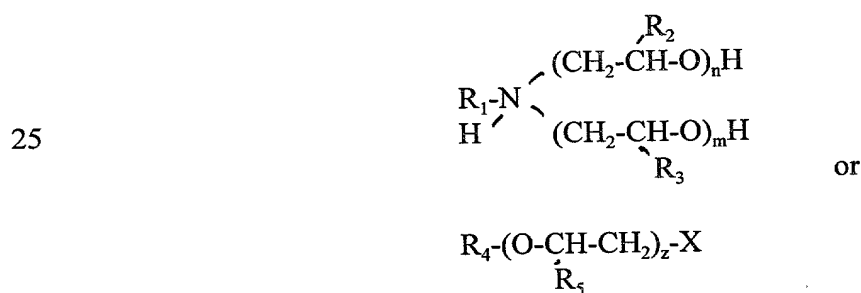

30 wherein R_1 and R_4 each independently is a saturated or unsaturated, straight-chain or branched hydrocarbon aliphatic radical each of 4 to 24 C atoms (e.g., alkyl or alkenyl) or R_4 is alkylphenyl of 1 to 18 C atoms in the optionally branched alkyl chain or H; R_2 , R_3 and R_5 each independently represent a methyl group or H, n plus m is a number from 1 to 20; z is a number from 0 to 15; and X is $-\text{COO}(-)$ or $-\text{OCH}_2\text{COO}(-)$, wherein, substituents

R_2 , R_3 and R_5 are also different in different monomer units of each chain, and optionally other organic diacids are excluded.


Preferably the fuel/additive is in a ratio to produce a water-in-oil (w/o) emulsion, i.e., between about 50:50 to 95:5, more preferably between about 65:35 to 90:10, and most preferably between about 80:20 to 85:15.

ASPECT BY PARTS II

In another aspect, the present invention relates to an additive composition for a combustible fuel to produce improved combustion and reduced smoke and particulate production of the fuel, which additive comprises a composition of components:

- a. a fatty acid of the structure $R-(C=O)-OH$, wherein R is selected from alkyl, alkenyl or alkynyl having from about 10 to 24 carbon atoms is present in between about 15 and 60 parts by volume;
- b. at least one alcohol selected from the group consisting of methanol, ethanol, propanol, butanol, and pentanol and clear liquid alcohols having from between about 6 and 12 carbon atoms, is present in between about 18 and 75 parts by volume, where methanol is combined with at least one other alcohol;
- c. water which is present in between about 2 and 32 parts by volume; and
- d. ammonia sufficient to neutralize between about 40 to 70 percent of the fatty acid of subpart a;

wherein the additive composition optionally excludes ethylene glycol, glycerine, polyethylene, polypropylene, aromatic organic compounds, sulfur, sulfur compounds, metals, metal compounds, compounds of phenanthrene, and emulsifiers of the general formula:

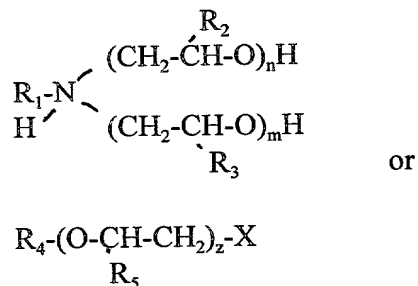

wherein R_1 and R_4 each independently is a saturated or unsaturated, straight-chain or branched hydrocarbon aliphatic radical each of 4 to 24 C atoms (e.g., alkyl or alkenyl)

or R₄ is alkylphenyl of 1 to 18 C atoms in the optionally branched alkyl chain or H; R₂, R₃ and R₅ each independently represent a methyl group or H, n plus m is an integer from 1 to 20; is an integer from 0 to 15; and X is -COO(-) or -OCH₂COO(-), wherein, substituents R₂, R₃ and R₅ are different in different monomer units of each chain, and optionally other organic diacids are excluded.



Preferably the fuel/additive is in a ratio to produce a water-in-oil (w/o) emulsion, i.e., between about 50:50 to 95:5, more preferably between about 65:35 to 90:10, and most preferably about 80:20 to 85:15 by volume.

10 ASPECT WHERE UREA REPLACES AMMONIA

In another aspect, the present invention relates to an additive composition for a combustible fuel to produce improved combustion and reduced smoke and particulate production of the fuel, which additive comprises a composition of components:

- a. a fatty acid of the structure R-(C=O)-OH, wherein R is selected from alkyl, alkenyl or alkynyl having from about 10 to 24 carbon atoms is present in between about 15 and 60 parts by volume;
- b. at least one alcohol selected from the group consisting of methanol, ethanol, propanol, butanol, pentanol and clear liquid alcohols having from between about 6 and 12 carbon atoms, is present in between about 18 and 75 parts by volume, where methanol is combined with at least one other alcohol;
- c. water which is present in between about 2 and 32 parts by volume; and
- d. urea sufficient to neutralize between about 40 to 70 percent of the fatty acid of subpart a;

wherein the additive composition optionally excludes ethylene glycol, glycerine, polyethylene, polypropylene, aromatic organic compounds, sulfur, sulfur compounds, metals, metal compounds, compounds of phenanthrene, and emulsifiers of the general formula:

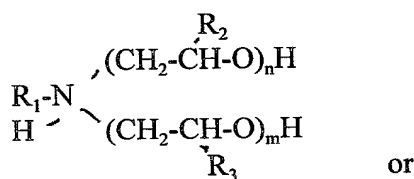

wherein R_1 and R_4 each independently is a saturated or unsaturated, straight-chain or branched hydrocarbon aliphatic radical each of 4 to 24 C atoms (e.g., alkyl or alkenyl) or R_4 is alkylphenyl of 1 to 18 C atoms in the optionally branched alkyl chain or H; R_2 , R_3 and R_5 each independently represent a methyl group of H, n plus m is a number from 1 to 20; z is a number from 0 to 15; and X is $-\text{COO}(-)$ or $-\text{OCH}_2\text{COO}(-)$, wherein, substituents R_2 , R_3 and R_5 the same or different in different monomer units of each chain, and optionally other organic diacids are excluded.



Preferably the fuel/additive is in a ratio to produce a water-in-oil (w/o) emulsion, i.e., between about 50:50 to 95:5, more preferably between about 65:35 to 90:10, and most preferably about 80:20 to 85:15.

ASPECT WHERE ETHANOL IS THE ONLY ALCOHOL

In another aspect, the present invention relates to an additive composition for a combustible fuel to produce improved combustion and reduced smoke and particulate production of the fuel, which additive comprises a composition of components:

- a. a fatty acid of the structure $\text{R}-(\text{C}=\text{O})-\text{OH}$, wherein R is selected from alkyl, alkenyl or alkynyl having from about 10 to 24 carbon atoms is present in between about 15 and 60 parts by volume;
- b. ethanol is present in between about 18 and 75 parts;
- c. water which is present in between about 2 and 32 parts by volume; and
- d. urea and/or ammonia sufficient to neutralize between about 40 to 70 percent of the fatty acid of subpart a;

wherein the additive composition optionally excludes ethylene glycol, glycerine, polyethylene, polyoxyethylene, polyoxypropylenes, aromatic organic compounds, sulfur, sulfur compounds, metals, metal compounds, compounds of phenanthrene, and emulsifiers of the general formula:

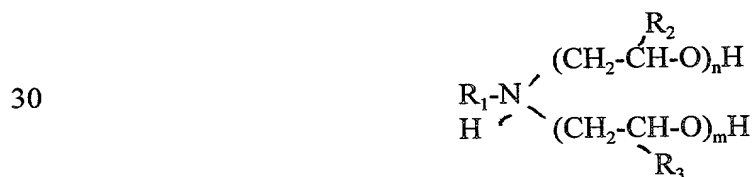

wherein R_1 and R_4 each independently is a saturated or unsaturated, straight-chain or branched hydrocarbon aliphatic radical each of 4 to 24 C atoms (e.g., alkyl or alkenyl) or R_4 is also can be alkylphenyl of 1 to 18 C atoms in the optionally branched alkyl chain or H; R_2 , R_3 and R_5 each independently represent a methyl group or H, n plus m is to be a number from 1 to 20; z can be a number from 0 to 15; and X is -COO(-) or -OCH₂COO(-), wherein, substituents R_2 , R_3 and R_5 are the same or different in different monomer units of each chain, and optionally other organic diacids are excluded.


Preferably the fuel/additive is a ratio to produce a water-in-oil (w/o) emulsion, i.e., between about 65:35 to 90:10, and most preferably about 80:20 to 85:15 by volume.

ASPECT WHERE C6-C12 ALCOHOLS ARE THE ONLY ALCOHOLS PRESENT

In another aspect, the present invention relates to an additive composition for a combustible fuel to produce improved combustion and reduced smoke and particulate production of the fuel, which additive comprises a composition of components.

- a. a fatty acid of the structure $R-(C=O)-OH$, wherein R is selected from alkyl, alkenyl or alkynyl having from about 10 to 24 carbon atoms is present in between about 15 and 60 parts by volume;
- b. at least one alcohol selected from the group consisting of clear liquid alcohols having from between about 6 and 12 carbon atoms, is present in between about 18 and 75 parts by volume;
- c. water which is present in between about 2 and 32 parts by volume; and
- d. urea and/or ammonia sufficient to neutralize between about 40 to 70 percent of the fatty acid of subpart a;

wherein the additive composition optionally excludes ethylene glycol, glycerine, polyethylene, polypropylene, aromatic organic compounds, sulfur, sulfur compounds, metals, metal compounds, compounds of phenanthrene, and emulsifiers of the general formula:

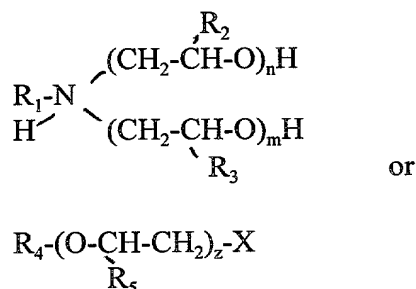

- 10 wherein R_1 and R_4 each independently is a saturated or unsaturated, straight-chain or branched hydrocarbon aliphatic radical each of 4 to 24 C atoms (e.g., alkyl or alkenyl) or R_4 is alkylphenyl of 1 to 18 C atoms in the optionally branched alkyl chain or H; R_2 , R_3 and R_5 each independently represent a methyl group or H, n plus m is a number from 1 to 20; z is a number from 0 to 15; and X is -COO(-) or $\text{-OCH}_2\text{COO(-)}$,
 15 wherein, substituents R_2 , R_3 and R_5 are the same or different in different monomer units of each chain, and optionally other organic diacids are excluded.

Preferably the fuel/additive is in a ratio to produce a water-in-oil (w/o) emulsion, i.e., between about 50:50 to 95:5, more preferably between about 65:35 to 90:10, and most preferably about 80:20 to 85:15 by volume.

20 ASPECT WHERE FATTY ALCOHOLS ARE INTRODUCED USING FOSSIL FUEL AS A CO-SOLVENT


In another aspect, the present invention relates to an additive composition for a combustible fuel to produce improved combustion and reduced smoke and particulate production of the fuel, which additive comprises a composition of components:

- 25 a. a fatty acid of the structure R-(C=O)-OH , wherein R is selected from alkyl, alkenyl or alkynyl having from about 10 to 24 carbon atoms is present in between about 15 and 60 parts by volume;
- b. at least one alcohol selected from the group consisting of methanol, ethanol, propanol, butanol, pentanol and clear liquid alcohols having from between
 30 about 6 and 12 carbon atoms, is present in between about 12 and 50 parts by volume, where methanol is combined with at least one other alcohol;
- d. water present in between about 2 and 32 parts by volume;
- e. urea, ammonia or combinations thereof sufficient to neutralize between about 40 to 70 percent of the fatty acid of subpart a;
- 35 f. at least one long-chain fatty alcohol selected from the group consisting

of alcohols which are solid at room temperature, having from between about 13 and 18 carbon atoms in between about 6 and 25 parts by volume;

g. a co-solvent of fossil fuel in between about 6 and 25 parts by volume;

wherein the additive composition optionally excludes ethylene glycol, glycerine, polyethylene, polypropylene, metals, metal compounds, compounds of phenanthrene, and emulsifiers the general formula:

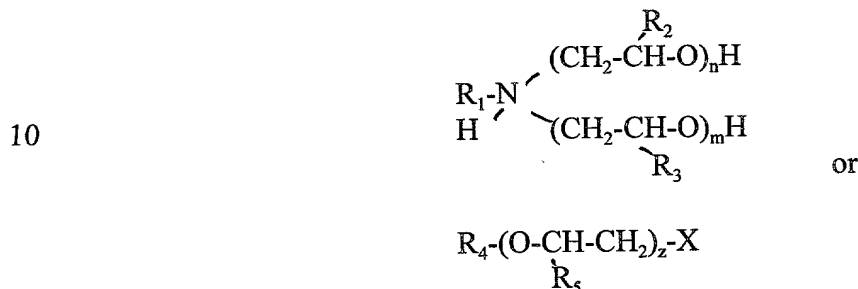

15

wherein R_1 and R_4 each independently is a saturated or unsaturated, straight-chain or branched hydrocarbon aliphatic radical each of 4 to 24 C atoms (e.g., alkyl or alkenyl) or R_4 is also can be alkylphenyl of 1 to 18 C atoms in the optionally branched alkyl chain or H; R_2 , R_3 and R_5 each independently represent a methyl group or H, n plus m is a number from 1 to 20; z is a number from 0 to 15; and X is -COO(-) or $\text{-OCH}_2\text{COO(-)}$, wherein, substituents R_2 , R_3 and R_5 are the same or different in different monomer units of each chain, and optionally other organic diacids are excluded.

Preferably the fuel/additive is in a ratio to produce a water-in-oil (w/o) emulsion, i.e., between about 50:50 to 95:5, more preferably between about 65:35 to 90:10, and most preferably about 80:20 to 85:15 by volume.


ASPECT WHERE FATTY ALCOHOLS ARE INTRODUCED USING A NON-IONIC SURFACTANT

In another aspect, the present invention relates to an additive composition for a combustible fuel to produce improved combustion and reduced smoke and particulate production of the fuel, which additive comprises a composition of components:

- a. a fatty acid of the structure R-(C=O)-OH , wherein R is selected from alkyl, alkenyl or alkynyl having from about 10 to 24 carbon atoms is present in between about 15 and 60 parts by volume;
- b. at least one alcohol selected from the group consisting of methanol,

ethanol, propanol, butanol, pentanol and clear liquid alcohols having from between about 6 and 12 carbon atoms, is present in between about 12 and 50 parts by volume, where methanol is combined with at least one other alcohol;

- d. water which is present in between about 2 and 32 parts by volume;
- 5 e. urea and/or ammonia sufficient to neutralize between about 40 to 70 percent of the fatty acid of subpart a;
- f. at least one long-chain fatty alcohol selected from the group consisting of alcohols which are solid at room temperature, having from between about 13 and 18 carbon atoms is present in between about 6 and 25 parts;
- 10 wherein the additive composition optionally excludes polyethylene, polypropylene, aromatic organic compounds, sulfur, sulfur compounds, metals, metal compounds, compounds of phenanthrene, and emulsifiers of the general formula:

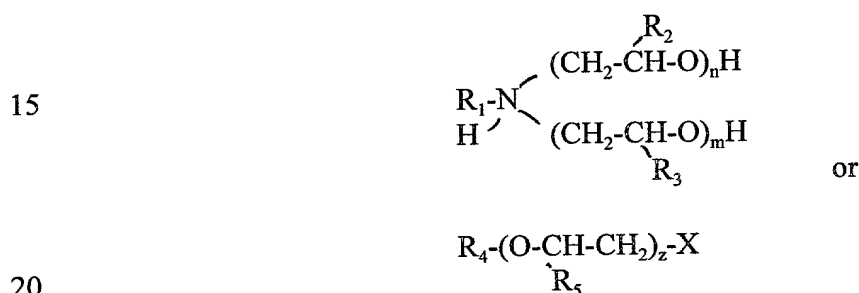

wherein R_1 and R_4 each independently is a saturated or unsaturated, straight-chain or branched hydrocarbon aliphatic radical each of 4 to 24 C atoms (e.g., alkyl or alkenyl) or R_4 is alkylphenyl of 1 to 18 C atoms in the optionally branched alkyl chain or
 25 H; R_2 , R_3 and R_5 each independently represent a methyl group or H, n plus m is an integer from 1 to 20; z is an integer from 0 to 15; and X is $-\text{COO}(-)$ or $-\text{OCH}_2\text{COO}(-)$, wherein, substituents R_2 , R_3 and R_5 are the same or different in different monomer units of each chain, and optionally other organic diacids are excluded.

Preferably the fuel/additive is in a ratio to produce a water-in-oil (w/o)
 30 emulsion, i.e., between about 50:50 to 95:5, more preferably between about 65:35 to 90:10, and most preferably about 80:20 to 85:15 by volume.


ASPECT WHERE FATTY ALCOHOLS AND NON-IONIC SURFACTANTS ARE
 INTRODUCED USING FOSSIL FUEL AS A CO-SOLVENT

35


The present invention relates to an additive composition for a combustible fuel

to produce improved combustion and reduced smoke and particulate production of the combusted fuel, which additive composition comprises:

- a. a fatty acid of the structure $R-(C=O)-OH$, wherein R is selected from alkyl, alkenyl or alkynyl having from about 10 to 24 carbon atoms;
 - 5 b. at least one alcohol selected from the group consisting of methanol, ethanol, propanol, butanol, pentanol and clear liquid alcohols having from between about 6 and 12 carbon atoms, where methanol is always be combined with at least one other alcohol;
 - c. water; and
 - 10 d. a source of nitrogen in an anhydrous state or as an aqueous solution selected from the group consisting of the ammonia, hydrazine, alkyl hydrazine, dialkyl hydrazine, urea, ethanolamine, monoalky ethanolamine, and dialkyl ethanolamine wherein alkyl is independently selected from methyl, ethyl, n-propyl or isopropyl, wherein trialkylamines are excluded;
 - 15 e. optionally, at least one long-chain fatty alcohol selected from the group consisting of alcohols which are solid at room temperature, having from between about 13 and 18 carbon atoms;
 - f. optionally, an ethoxylated non-ionic surfactant wherein the ethylene oxide condensation product is formed with a fatty alcohol of the formula:
20
$$R_6-(OOCH_2-CH_2)_n OH$$
wherein R_6 is a long-chain, saturated or unsaturated hydrocarbon radical containing 12 to 18 carbon atoms and n is an integer from 1 to 4;
 - g. optionally, a liquid fossil fuel.
- wherein components a to g when combined with mixing with said combustible
25 fuel form a clear stable micro-emulsion having a viscosity similar to a liquid combustible fuel,
- wherein the additive composition optionally excludes ethylene glycol, glycerine, polyethylene, polypropylene, aromatic organic compounds, sulfur, sulfur compounds, metals, metal compounds, compounds of phenanthrene, and emulsifiers of the general
30 formula:



5



- 10 wherein R₁ and R₄ each independently is a saturated or unsaturated, straight-chain or branched hydrocarbon aliphatic radical each of 4 to 24 C atoms (e.g., alkyl or alkenyl) or R₄ also can be alkylphenyl of 1 to 18 C atoms in the optionally branched alkyl chain or H; R₂, R₃ and R₅ each independently represent a methyl group of H, n plus m is to be a number from 1 to 20; z can be a number from 0 to 15; and X is -
- 15 COO(-) or -OCH₂COO(-), wherein, substituents R₂, R₃ and R₅ can also be different in different monomer units of each chain, and optionally other organic diacids are excluded.

- Compositions of the present invention are easily used in place of the corresponding hydrocarbon fuels without substantial changes in combustion apparatus
- 20 or equipment.

Even with the components used herein there are rules and limitations. For example:

- Too much methanol causes dissolving of sensitive engine or fuel system parts.
- Too much water causes poor combustion, possible corrosion.
- 25 Too much of any water-soluble portion causes no stability.
- Too much water-insoluble alcohol causes poor viscosity.
- Too much ethoxylated alcohol causes poor viscosity and poor combustion.
- Too much fatty acid causes poor viscosity, fatty acid degradation.
- Too much ammonia causes no stability of the microemulsion.
- 30 Too much of any surface-active portion causes poor viscosity, and factors prohibitively in end-use costs.
- On the other hand:
- Too little water-soluble alcohol causes poor viscosity and reduces emissions improvements.
- 35 Too little water causes reduced emissions improvements;

Too little surfactant portion causes no stability; and

Too little water-insoluble alcohol in relation to ethoxylated alcohols or fatty acids causes poor viscosity.

The stability of the fuel/additive emulsions of the present invention at lower
5 temperatures from about -20°C to $+70^{\circ}\text{C}$. Alternatively, the upper limit is about 20°C (preferably about 20°C) lower than the boiling point of the fuel.

The stable fuel/additive emulsions have improved long term storage properties.

The appearance of the fuel/additive emulsion is as a clear liquid having the expected properties of a water-in-oil without microemulsion. All of the components of
10 the fuel/additive emulsion are known and are preparable from conventionally known starting materials. Most, if not all, are available from commercial sources.

Some preferred compositions of the present invention include but are not limited to those:

wherein Example A below is repeated except that the additive composition
15 amounts are replaced to be the additive composition as follows:

linoleic acid, or oleic acid, or both;	16-36 parts by volume
octanol;	6-32 parts by volume
methanol;	12-28 parts by volume
water;	0.5-16 parts by volume
20 aqueous ammonia or urea	0.3-6 parts by volume

where the preferred fuel is Diesel fuel, the fuel/additive ratio is about 65:35 to 95:5 and the result of mixing by gentle swirling produces a clear microemulsion composition that remains stable over time, up to 6 months or longer, and during and after storage at a temperature of -20°C .

25 wherein Example A below is repeated except that the additive composition amounts are replaced to be the additive composition as follows:

linoleic acid, or oleic acid, or both;	16-36 parts by volume
2-ethyl hexanol-1, or octanol or octadecanol,	
or decanol;	6-32 parts by volume
30 methanol;	12-28 parts by volume
water;	0.5-16 parts by volume
aqueous ammonia or urea	0.3-6 parts by volume

where the preferred fuel is Diesel fuel, the fuel/additive ratio is about 65:35 to 95:5 and the result of mixing by gentle swirling produces a clear microemulsion composition that remains stable over time, up to 6 months or longer, and during and after storage at a temperature of -20°C.

- 5 wherein Example A below is repeated except that the additive composition amounts are replaced to be the additive composition as follows:

linoleic acid, or oleic acid, or both;	16-36 parts by volume
2-ethyl hexanol-1, or octanol or octadecanol,	
or decanol;	6-32 parts by volume
10 methanol, or ethanol, or both	
or methanol and/or ethanol	
with iso-propanol or butanol;	12-28 parts by volume
water;	0.5-16 parts by volume
aqueous ammonia or urea	0.3-6 parts by volume

- 15 where the preferred fuel is Diesel fuel, the fuel/additive ratio is about 65:35 to 95:5 and the result of mixing by gentle swirling produces a clear microemulsion composition that remains stable over time, up to 6 months or longer, and during and after storage at a temperature of -20°C.

- wherein Example A below is repeated except that the additive composition
20 amounts are replaced to be the additive composition as follows:

linoleic acid, or oleic acid, or both;	16-36 parts by volume
ethoxylated alcohol with 12-18 carbons	
and ethylene oxide ending of less than 5;	2-10 parts by volume
2-ethyl hexanol-1, or octanol or octadecanol,	
25 or decanol;	6-32 parts by volume
methanol, or ethanol, or both	
or methanol and/or ethanol	
with iso-propanol or butanol;	12-28 parts by volume
water;	0.5-16 parts by volume
30 aqueous ammonia or urea	0.3-6 parts by volume

 where the preferred fuel is Diesel fuel, kerosene, or heating oil, the fuel/additive ratio is about 65:35 to 95:5 and the result of mixing by gentle swirling produces a clear

microemulsion composition that remains stable over time, up to 6 months or longer, and during and after storage at a temperature of -20°C.

wherein Example A below is repeated except that the additive composition amounts are replaced to be the additive composition as follows:

- 5 ethoxylated alcohol with 12-18 carbons
and ethylene oxide ending of less than 5; 2-10 parts by volume
2-ethyl hexanol-1, or octadecanol,
or decanol; 6-32 parts by volume
ethanol, or ethanol with methanol,
10 or ethanol with iso-propanol or butanol; 12-32 parts by volume
water; 0.5-8 parts by volume

- where the preferred fuel is Diesel fuel or gasoline, fuel/additive ratio is about 65:35 to 95:5 and the result of mixing by gentle swirling produces a clear microemulsion composition that remains stable over time, up to 6 months or longer,
15 and during and after storage at a temperature of -20°C.

wherein Example A below is repeated except that the additive composition amounts are replaced to be the additive composition as follows:

- ethoxylated alcohol with 12-18 carbons
and ethylene oxide ending of less than 5; 6-32 parts by volume
20 ethanol, or ethanol with methanol,
or ethanol with iso-propanol or butanol; 12-32 parts by volume
water; 0.5-8 parts by volume

- where the preferred fuel is Diesel fuel or gasoline, fuel/additive ratio is about 65:35 to 95:5 and the result of mixing by gentle swirling produces a clear
25 microemulsion composition that remains stable over time, up to 6 months or longer, and during and after storage at a temperature of -20°C.

wherein Example A is repeated except that the additive composition amounts are replaced to be the additive composition as follows:

- 2-ethyl hexanol-1, or octanol or octadecanol,
30 or decanol; 12-32 parts by volume
ethanol, or ethanol with methanol,
or ethanol with iso-propanol or butanol; 12-32 parts by volume

water;

0.5-4 parts by volume

where the preferred fuel is Diesel fuel or gasoline, fuel/additive ratio is about 65:35 to 95:5 and the result of mixing by gentle swirling produces a clear microemulsion composition that remains stable over time, up to 6 months or longer, and during and after storage at a temperature of -20°C.

It is important to understand that the present invention is a significant advance in additives designed to introduce water-soluble components into Diesel fuel and other fossil fuels.

Although it is generally understood that the addition of water-soluble elements into fossil fuels would have a positive oxygenating effect; fossil fuels are, generally, chemically hydrophobic, meaning they will not readily absorb or mix with water and/or water-soluble components.

Gasoline will tolerate certain levels of ethanol and methanol, which are water-soluble, but will not tolerate high levels of methanol, will not tolerate any level of water, and will, in the presence of water, exhibit immediate phase separation without some chemical or mechanical means of breaking surface tension to produce a stable solution or emulsion.

Less-refined fossil fuels such as Diesel fuel and kerosene, are especially hydrophobic, and will not tolerate any level of water-soluble alcohol or water, and will, in the presence of either, exhibit immediate phase separation without some chemical or mechanical means of breaking surface tension to produce a stable solution or emulsion.

It is important to understand that many methods have been tried to overcome the problem of phase separation between fossil fuels and water-soluble components.

Prior art, such as Wenzel et al, US Patent 4,083,698, successfully produces stable microemulsions with water and methanol, but utilizes high concentrations of non-ionic surfactants with 5,7,9 and up to 20 moles of ethylene oxide, or polyethylene, polyoxyethylene, or polyoxypropylene molecules. While these create stable microemulsions, viscosity is adversely affected, producing compositions that are more viscous than Diesel fuel, which poses potential problems in adequate fuel flow during use in an engine.

The above ethylene, polyethylene, polyoxyethylene, or polyoxypropylene additions are also largely incombustible, which poses the immediate problem of increased

exhaust smoke when not specifically limited or eliminated entirely from compositions for use as fuel.

Other products currently used or under investigation for the purpose of introducing water-soluble elements into fossil fuel include Methyl Tertiary Butyl Ether
5 (MTBE) and Methyltetrahydrofuran.

MTBE, which is currently used in many states as a gasoline additive, is a significant alteration of the chemical composition of methanol, making it 'oleophilic,' so that it will mix with and can be used to oxygenate gasoline. The process of producing MTBE, however, also alters the biodegradability of the methanol, and has
10 been shown to filtrate through to groundwater and contaminate drinking water supplies.

The present invention can be used to introduce water-soluble alcohols into gasoline to achieved oxygenation with no toxic contamination of the air or water supplies.

Methyltetrahydrofuran, which is currently under study as a Diesel fuel additive,
15 is another significant alteration of methanol, increasing its solvent qualities. This methanol compound breaks surface tension between Diesel fuel and ethanol, making it possible to utilize ethanol for its oxygenating properties.

However, methyltetrahydrofuran is an extremely aggressive solvent that melts steel. Its use in engines as a fuel additive poses a very high risk of causing damage to
20 internal engine and sensitive fuel system parts.

The present invention can be used to introduce water soluble alcohols and water into Diesel fuel with no damage to engine or fuel system parts.

Even currently used ethanol, denatured with methanol, poses a problem when used to oxygenate gasoline because methanol especially attracts water to the mixture,
25 promoting phase separation; and because methanol is a much stronger solvent than ethanol (about 10 times stronger) which has been shown to adversely affect pipelines through which gasoline is shipped to many suppliers.

The present invention can be used to introduce ethanol into gasoline to achieve oxygenation, with no phase separation, damage to pipelines, engines or fuel systems,
30 and with no toxic contamination of the air or water supplies.

It is also important to understand that, in addition to fossil fuel oxygenation, the present invention is a significant advance in additives designed to introduce renewable

and readily-available resources into fossil fuels.

It is generally understood that successful introduction into fossil fuels of oils and alcohols derived from bio-mass sources would have a positive effect on extending dwindling fuel supplies by fully utilizing readily-available resources that are also
5 renewable.

Significant attempts have been made to introduce ethanol, which can be derived from bio-mass sources, into fossil fuels, as described above.

Significant attempts have also been made to introduce vegetable oil products, such as soy and rapeseed oils, into fossil fuels, specifically for the purpose of utilizing
10 these oils.

A product commercially known as "Biodiesel" is currently being developed and tested in transit bus lines, marine diesel engines, and industrial furnaces. Biodiesel is made from methyl esters, a process by which methanol and vegetable oils are chemically bonded.

15 However, methyl esters solidify at relatively high temperatures. Biodiesel must be heat-jacketed for storage at temperatures of less than 32°F, and no practical solution has been found for the problem of additive gelling in fuel tanks when ambient temperatures drop below freezing.

It is important to understand that the present invention utilizes components, such as fatty acids, that can be derived from a wide range of renewable sources such as
20 soy, rapeseed, peanut, safflower, tall(tree) oil, and tallow, with no compromise to additive viscosity at high or low temperatures.

The compositions of the invention also utilize water-insoluble alcohols that can be derived from either fossil (coal) or renewable sources such as palm or coconut. The
25 present invention also utilizes water-soluble alcohols, such as ethanol, that can also be derived from fossil sources (such as coal), or from bio-mass sources such as corn or surplus or damaged crops.

It is important to understand that the wide range of possible sources from which components for the present invention can be derived is a significant advance in additive
30 technologies designed to incorporate renewable resources into fossil fuels. Many present technologies rely on one or two sources, such as soy or canola (rapeseed) oils, which presently are prohibitively expensive and hinder commercially successful

utilization. Biodiesel is one such technology.

Other technologies rely on inexpensive components, such as methanol, as the source from which components are derived. However, methanol derivatives tend to be toxic, or non-biodegradeable, or chemically aggressive, or all of the above. MTBE and methylterahydrofuran are such examples.

It is possible to derive components for the present invention from a wide selection of renewable feedstocks, such as tall oil, tallow, soy, canola, waste oils, cottonseed, corn, peanut, safflower, coconut and palm oils, as well as crushed waste, surplus, or damaged crops.

But it is also important that several of the preferred embodiments of the present invention can be derived almost entirely from coal, and still produce clear, stable microemulsions that oxygenate fossil fuels.

This provides an essential link, economically, for successfully introducing alcohol/water-based oxygenators that can also be made entirely from renewable sources at any time that positive economic and/or political factors make them commercially viable.

The present invention is, among other things, a 'roadmap' for the successful introduction of renewable fuels, by making it possible to mix relatively high-cost renewable components with lower-cost fossil-based components in proportions that optimize economic and environmental benefits.

The present invention makes it possible to utilize all of the above-mentioned components in such a way that the resulting compositions will maintain, and in some cases improve, viscosity levels of Diesel and other fossil fuels.

The present invention also makes it possible to utilize all of the above-mentioned components in such a way that the resulting compositions will not pollute the environment, or harm engines or fuel systems.

The present invention also makes it possible to utilize all of the above-mentioned components in such a way that the resulting compositions maintain good combustion characteristics, and, when properly mixed with Diesel and other fossil fuels, will improve combustion and reduce toxic exhaust emissions.

Some preferred compositions of the present invention include but are not limited to those:

wherein Examples 1-7 are repeated except that the additive composition amounts are replaced to be the additive composition as follows:

- 2-ethyl hexanol- 1 or octanol
or octadecanol, or decanol; 12-32 parts by volume
5 ethanol, or ethanol with methanol,
or ethanol with iso-propanol or butanol; 12-32 parts by volume
water 0.5-4 parts by volume

where the fuel/additive ratio is about 80:20 to 95:5 and the result of combustion of the resulting fuel additive composition is improved combustion, reduced carbon
10 buildup inside the engine, reduced smoke, particulates, and noxious gases, reduced
unburnt hydrocarbon emissions and improved fuel consumption efficiency.

wherein Examples 1-7 are repeated except that the additive composition amounts are replaced to be the additive composition as follows:

- ethoxylated alcohol with 12-18 carbons
15 and ethylene oxide ending of less than 5; 6-32 parts by volume
ethanol, or ethanol with methanol,
or ethanol with iso-propanol or butanol; 12-32 parts by volume
water 0.5-8 parts by volume

where the fuel/additive ratio is about 80:20 to 95:5 and the result of combustion of the resulting fuel additive composition is improved combustion reduced carbon
20 buildup inside the engine, reduced smoke, particulates, and noxious gases, reduced
unburnt hydrocarbon emissions and improved fuel consumption efficiency.

In another aspect Examples 1-7 are repeated except that the additive composition amounts are replaced to be the additive composition as follows:

- 25 ethoxylated alcohol with 12-18 carbons
and ethylene oxide ending of less than 5; 2-10 parts by volume
2-ethyl hexanol-1, or octanol,
or octadecanol, or decanol; 6-32 parts by volume
ethanol, or ethanol with methanol, or
30 ethanol with iso-propanol or butanol; 12-32 parts by volume
water 0.5-8 parts by volume

where the fuel/additive ratio is about 80:20 to 95:5 and the result of combustion

of the resulting fuel additive composition is improved combustion, reduced carbon buildup inside the engine, reduced smoke, particulates, and noxious gases, reduced unburnt hydrocarbon emissions and improved fuel consumption efficiency.

In another aspect Examples 1, 2, 3 or 7 below are repeated except that the
5 additive composition amounts are replaced to be the additive composition as follows:

	linoleic acid, or oleic acid, or both;	16-36 parts by volume
	ethoxylated alcohol with 12-18 carbons	
	and ethylene oxide ending of less than 5;	2-10 parts by volume
10	2-ethyl hexanol-1, or octanol,	
	or octadecanol, or decanol;	6-32 parts by volume
	methanol, or ethanol, or both,	
	or methanol and/or ethanol	
	with iso-propanol or butanol;	12-28 parts by volume
15	water;	0.5-16 parts by volume
	aqueous ammonia or urea	0.3-6 parts by volume
	where the fuel/additive ratio is about 80:20 to 95:5 and the result of combustion	
	of the resulting fuel additive composition is improved combustion, reduced carbon	
	buildup inside the engine, reduced smoke, particulates, and noxious gases, reduced	
20	unburnt hydrocarbon emissions and further improved fuel consumption efficiency.	

In another aspect Examples 1, 2, 3 or 7 below are repeated except that the
additive composition amounts are replaced to be the additive composition as follows:

	linoleic acid, or oleic acid, or both;	16-36 parts by volume
	2-ethyl hexanol-1, or octanol,	
25	or octadecanol, or decanol;	6-32 parts by volume
	methanol, or ethanol, or both,	
	or methanol and/or ethanol	
	with iso-propanol or butanol;	12-28 parts by volume
	water;	0.5-16 parts by volume
30	aqueous ammonia or urea;	0.3-6 parts by volume
	where the fuel/additive ratio is about 80:20 to 95:5 and the result of combustion	
	of the resulting fuel additive composition is improved combustion, reduced carbon	

buildup inside the engine, reduced smoke, particulates, and noxious gases, reduced unburnt hydrocarbon emissions and further improved fuel consumption efficiency.

In another aspect Examples 1, 2, 3 or 7 below are repeated except that the additive composition amounts are replaced to be the additive composition as follows:

5	linoleic acid, or oleic acid, or both;	16-36 parts by volume
	methanol, or ethanol, or both,	
	or methanol and/or ethanol with	
	iso-propanol or butanol;	12-28 part by volume
	water;	0.5-16 parts by volume

aqueous ammonia or urea; 0.3-6 parts by volume
where the fuel/additive ratio is about 80:20 to 95:5 and the result of combustion of the resulting fuel additive composition is improved combustion, reduced carbon buildup inside the engine, reduced smoke, particulates, and noxious gases, reduced unburnt hydrocarbon emissions and further improved fuel consumption efficiency.

15 In another aspect Examples 1 ,2, 3 or 7 below are repeated except that the additive composition amounts are replaced to be the additive composition as follows:

	fatty acid (linoleic acid)	40 to 44 parts by volume;
	water-insoluble alcohol (octanol)	20 to 22 parts by volume;
	water-soluble alcohol (ethanol denatured	
20	with 5-10% methanol)	16 to 18 parts by volume;
	water	4 to 6 parts by volume;
	aqueous ammonia (28%)	4 to 6 parts by volume;

where the fuel/additive ratio is about 95:5 to 85:15 and the result of combustion of the resulting fuel/additive composition is improved combustion reduced carbon buildup inside the engine, and reduced smoke, particulates, and noxious gases.

In another aspect Examples 1, 2, 3 or 7 below are repeated except that the additive composition amounts are replaced to be the additive composition as follows:

	fatty acid (linoleic acid)	34 to 36 parts by volume;
	water-insoluble alcohol (octanol)	16 to 18 parts by volume;
30	water-soluble alcohol (methanol-denatured)	20 to 24 parts by volume;
	water	9 to 12 parts by volume;
	aqueous ammonia (28%)	4.6 to 4.9 parts by volume;

where the fuel/additive ratio is about 90:10 to 75:25 and the result of combustion of the resulting fuel/additive composition is improved combustion, reduced carbon buildup inside the engine, and further reduced smoke, particulates, and noxious gases compared to compositions having a lower additive proportion.

- 5 In another aspect Examples 1, 2, 3 or 7 below are repeated except that the additive composition amounts are replaced to be the additive composition as follows:

	fatty acid (linoleic acid)	28 to 32 parts by volume;
	water-insoluble alcohol (octanol)	10 to 16 parts by volume;
	water-soluble alcohol (methanol) + ethanol	24 to 28 parts by volume;
10	water	10 to 15 parts by volume;
	aqueous ammonia (28%)	3.8 to 4.4 parts by volume;

- where the fuel/additive ratio is about 80:20 to 65:35 and the result of combustion of the resulting fuel/additive composition is improved combustion, reduced carbon buildup inside the engine, and reduced noxious gases and remarkably reduced smoke and particulate emissions.
- 15

In another aspect Examples 1, 2, 3 or 7 below are repeated except that the additive composition amounts are replaced to be the additive composition as follows:

	fatty acid (linoleic acid)	24 to 26 parts by volume;
	water-insoluble alcohol (octanol)	8 to 12 parts by volume;
20	water-soluble alcohol (methanol) + ethanol	24 to 28 parts by volume;
	water	10 to 15 parts by volume;
	aqueous ammonia (28%)	3.8 to 4.4 parts by volume;

- where the fuel/additive ratio is about 65:35 to 50:50 and the result of combustion of the resulting fuel/additive composition is improved combustion, reduced carbon buildup inside the engine, and reduced noxious gases and remarkably reduced smoke and particulate emissions.
- 25

- It is important to understand that the present invention is a significant advance in additives designed to oxygenate fossil fuels. The selection and use of the components described herein fall within the US EPA 'CHON' classification, meaning they contain only carbon, hydrogen, oxygen and nitrogen.
- 30

The selection and use of the components described herein are non-toxic compared to fossil fuel, especially Diesel fuel, and are non-toxic and bio-degradeable

compared to other additives such as methyltetrahydrofuran and methyl tertiary butyl ether (MTBE).

The selection and use of the components described herein can be derived entirely from renewable bio-sources, and some may also be derived from coal to offset
5 currently high costs associated with renewable fuels production compared to fossil fuel production.

It is important also to understand that the present invention is a significant advance in additives for fuels for internal combustion engines. The selection and use of the components described herein improve by about 50% or greater reduction of the
10 smoke and particulates produced by incomplete combustion. Specific additive compositions will provide 30%, 40%, 50%, 60%, 70%, 80% or greater reductions in total particulate emissions and 50%, 60%, 70%, 80%, 90% or greater reduction in smoke opacity.

The commercial sources of components can be obtained by referring to
15 Chemical Sources U.S.A. published annually by Directories Publications, Inc. of Boca Raton, Florida. Usually the materials are used in the present invention as received without further purification.

The following Examples are provided to be illustrative and descriptive only. They are not to be construed to be limited in any way.

20

EXAMPLE 1

COMBUSTION TESTS WITH ADDITIVE COMPOSITION

PHOTO DOCUMENTATION OF VISIBLE EXHAUST EMISSIONS

a) A confidential test experiment was performed at the Stockton East Water District, Stockton, California.

25 The engine was a 300 hp V8 Caterpillar Diesel engine (one of four pumping engines at the site).

The additive formulation was by parts by volume:

- 30 parts linoleic acid
- 10 parts TERGITOL 1553 (3 moles ethylene oxide 15C alcohol)
- 30 28 parts methanol
- 15 parts water
- 4.1 parts aqueous ammonia

The blend ratio was Diesel fuel:additive of 65:35 by volume.

Forty gallons of the subject additive blend in a 55 gallon drum were lifted by forklift to the level of the far right engine and the fuel pump/line was secured to the fuel drum. The engine was started with fuel/additive blend as its only fuel supply. No
5 changes were made to the engine other than switching the fuel supply.

With reference to Figures 1-6 the experimental results are described.

Figure 1 shows Caterpillar engine used for the test.

Figure 2 shows containers of the additive blends.

Figure 3 shows engine housing building with typical straight diesel fuel startup
10 emissions shown from the left smoke stack.

Figure 4 shows a typical startup from engine using the fuel/additive blend shown from far right smoke stack.

Figure 5 shows typical smoke wisp from two left smoke stacks where straight diesel fuel is being used.

15 Figure 6 shows no visible smoke from the far right smoke stack where the fuel additive blend has been running for approximately 15 minutes. Engine associated with the left smoke stack is not running and far left smoke wisp above the far left dome is from an engine using straight Diesel fuel.

EXAMPLE 2

20 COMBUSTION TESTS WITH ADDITIVE COMPOSITION

1-MINUTE FILTER SAMPLE COLLECTION OF PARTICULATE EMISSIONS

a) A confidential test experiment was performed at the Stockton East Water District, Stockton, California.

The engine was a 360 hp V8 Caterpillar diesel engine (one of four pumping
25 engines at the site).

The additive formulation, was by parts, by volume:

30 parts linoleic acid
10 parts octanol
28 parts methanol
30 15 parts water
4.1 parts aqueous ammonia

The blend ratio was Diesel fuel: additive of 65:35 by volume.

The white cloth-like material used as the filter to collect particulates is a white felt "Classic felt" approximately 8-1/2" wide x 11" long, available from Foss Manufacturing Co., Retail Division, and is also available from Mendel's Far-Out Fabrics, 1556 Haight Street, San Francisco, CA 94117.

5 The properties are as follows:

FELT PROPERTY TABLE

	<u>PROPERTY</u>	<u>SPECIFICATION</u>	<u>TEST</u>	<u>METHOD</u>
	Fiber	Polyester and/or Acrylic		
10	Width	As requested +/- .5"	ASTM	D461
	Weight	5.0+/- .5 OZ/YD2	FTM N	W503
	Thickness	.080"+/- .010"	ASTM	D1777
	Tensile Warp	75 LBS minimum	FTM N	W505
	@ 10 lb Fill	85 LBS minimum		
15	Elongation Warp	25% AVG.	FTM N	W506
	@ 10 lb Fill	40% AVG.		
	Appearance	To Match Approved Standard	Visual	
	Color	To Match Approved Standard	Visual	
	Critical	Appearance, Weight and Gauge		

20 The filters were stretched across generally available wooden embroidery hoops approximately 7" in diameter.

These filters are intended as a visual aid to demonstrate smoke and particulate reduction. They are not intended to be used for quantitative (weighed) studies. They provide qualitative comparisons between diesel fuel emissions and emissions from the additive fuel composition.

25 Forty gallons of the subject additive blend in a 55 gallon drum were lifted by forklift to the level of the far right engine and the fuel pump/line was secured to the fuel drum. The engine was started with fuel/additive blend as its only fuel supply. No changes were made to the engine other than switching the fuel supply.

30 The muffler and exhaust pipe for the engine in Figure 1 are located on the roof of the building which houses the water pumping engines. Each filter sample was held approximately 5-7 inches above the exhaust pipe with a pair of standard long-handled pliers available in a hardware store. All sample collection tests lasted exactly one

minute (60 seconds).

With reference to Figures 7-10 and 11-18, the experimental results are described.

Figures 7-10 show the procedure used for collecting filter samples.

Figures 11-18 show the emission-reduction results.

- 5 (b) Similarly Example 2(a) is repeated except that the additive composition and amounts are replaced to be the additive composition as follows:

	fatty acid (linoleic acid)	44 parts by volume;
	water-insoluble alcohol (octanol)	22 parts by volume;
	water-soluble alcohol (methanol)	18 parts by volume;
10	water	6 parts by volume;
	aqueous ammonia (28%)	6 parts by volume;

where the fuel additive ratio is about 95:5 to 85:15 and the result of combustion of the resulting fuel/additive composition is improved combustion, reduced carbon buildup inside the engine and reduced smoke, particulates, and noxious gases.

- 15 (c) Similarly Example 2(a) is repeated except that the additive composition and amounts are replaced to be the additive composition as follows:

	fatty acid (linoleic acid)	36 parts by volume;
	water-insoluble alcohol (octanol)	18 parts by volume;
	water-soluble alcohol (methanol)	24 parts by volume;
20	water	12 parts by volume;
	aqueous ammonia	5.5 parts by volume;

- where the fuel additive ratio is about 90:10 to 75:25 and the result of combustion of the resulting fuel/additive composition is improved combustion) reduced carbon buildup inside the engine and further reduced smoke, particulates, and noxious gases compared to compositions having a lower additive proportion.
- 25

- (d) Similarly Example 2(a) is repeated except that the additive composition and amounts are replaced to be the additive composition as follows:

	fatty acid (linoleic acid)	32 parts by volume;
	water-insoluble alcohol (octanol)	16 parts by volume;
30	water-soluble alcohol (methanol)	28 parts by volume;
	water	15 parts by volume;
	aqueous ammonia (28%)	4.9 parts by volume;

where the fuel additive ratio is about 80:20 to 65:35 and the result of combustion of the resulting fuel/additive composition is improved combustion, reduced carbon buildup inside the engine and reduced noxious gases and remarkably reduced smoke and particulate emissions) where the results are essentially the same as
5 represented in Figures 11-18.

(e) Similarly Example 2(a) is repeated except that the additive composition and amounts are replaced to be the additive composition as follows:

	fatty acid (linoleic acid)	26 parts by volume;
	water-insoluble alcohol (octanol)	12 parts by volume;
10	water-soluble alcohol (methanol)	28 parts by volume;
	water	15 parts by volume;
	aqueous ammonia (28%)	4.4 parts by volume;

where the fuel additive ratio is about 65:35 to 50:50 and the result of combustion of the resulting fuel/additive composition is improved combustion, reduced
15 carbon buildup inside the engine and reduced noxious gases and remarkably reduced smoke and particulate emissions) where the results are essentially the same as represented in Figures 11 - 18.

(f) Similarly Example 2(a) is repeated except that the additive composition and amounts are replaced to be the additive composition as follows:

20	fatty acid (oleic acid)	40 parts by volume;
	water-insoluble alcohol (octanol)	20 parts by volume;
	water-soluble alcohol (methanol)	16 parts by volume;
	water	4 parts by volume; and
	aqueous ammonia (28%)	4 parts by volume,

25 where the fuel additive ratio is about 95:5 to 85:15 and the result of combustion of the resulting fuel/additive composition is improved combustion, reduced carbon buildup inside the engine and reduced smoke, particulates, and noxious gases.

(g) Similarly Example 2(a) is repeated except that the additive composition and amounts are replaced to be the additive composition as follows:

30	fatty acid (oleic acid)	34 parts by volume;
	water-insoluble alcohol (octanol)	16 parts by volume;
	water-soluble alcohol (methanol)	20 parts by volume;

water 9 parts by volume;
aqueous ammonia (28%) 4.6 parts by volume,

where the fuel additive ratio is about 90:10 to 75:25 and the result of combustion of the resulting fuel/additive composition is improved combustion, reduced carbon buildup inside the engine and further reduced smoke, particulates, and noxious gases compared to compositions having a lower additive proportion.

(h) Similarly Example 2(a) is repeated except that the additive composition and amounts are replaced to be the additive composition as follows:

10 fatty acid (oleic acid) 28 parts by volume;
water-insoluble alcohol (octanol) 10 parts by volume;
water-soluble alcohol (methanol) 24 parts by volume;
water 10 parts by volume;
aqueous ammonia (28%) 3.8 parts by volume,

where the fuel additive ratio is about 80:20 to 65:35 and the result of combustion of the resulting fuel/additive composition is improved combustion, reduced carbon buildup inside the engine and reduced noxious gases and remarkably reduced smoke and particulate emissions where the results are essentially the same as represented in Figures 11-18.

(i) Similarly Example 2(a) is repeated except that the additive composition and amounts are replaced to be the additive composition as follows:

20 fatty acid (oleic acid) 24 parts by volume;
water-insoluble alcohol (octanol) 8 parts by volume;
water-soluble alcohol (methanol) 24 parts by volume;
water 10 parts by volume; and
25 aqueous ammonia (28%) 3.8 parts by volume,

where the fuel additive ratio is about 65:35 to 50:50 and the result of combustion of the resulting fuel/additive composition is improved combustion, reduced carbon buildup inside the engine and reduced noxious gases and remarkably reduced smoke and particulate emissions where the results are essentially the same as represented in Figures 11-18.

EXAMPLE 3

COMBUSTION TESTS WITH ADDITIVE COMPOSITION
(US ENVIRONMENTAL PROTECTION AGENCY FEDERAL TEST PROCEDURE
FOR STATIONARY SOURCES)

- 5 a) A confidential test experiment was performed at the Stockton East Water District, Stockton, California.

 An independent emissions testing company, Normandeau Associates of Berkeley, CA performed all emissions tests according to US Environmental Protection agency Federal Test Procedure for stationary sources. Additional particulate
10 measurements were taken to meet California Air Resource Board specifications.

 The additive formulation for both test procedures was by parts, by volume:

- 32 parts linoleic acid
 12 parts octanol
 28 parts methanol
15 16 parts water
 4.4 parts aqueous ammonia.

 The engines were two Caterpillar V8 4-Stroke-Cycle Diesel engines (two of the four pumping engines at the site), number Engine # P27 and Engine # P28. Data for engine type and condition at time of testing are as follows:

- 20 # P273 Model: L2-2
 Rated Horsepower: 3 1 9
 Rated RPM: 1200
 Total use hours: 38,761.1
 OEM recommended use hours
25 before engine overhaul: 8,000.0
 Use hours since last overhaul: 10,304.4

 # P28: Model:L2-2
 Rated Horsepower: 3 1 9
30 Rated RPM: 1200
 Total use hours: 31,001.0
 OEM recommended use hours

before engine overhaul: 8,000.0

Use hours since last overhaul: 2,192.3

The test procedure observed was as follows:

At 10:30 a.m. on Day One of testing, Engine # P27 was stabilized at
5 approximately 293 hp and exactly 1080 rpm while running on CA # 2 Diesel fuel.
Three full emissions tests were run over the following consecutive four hours. See
attached results in Table J as Column AA.

At 9:00 p.m. on Day One of testing, the fuel source for engine # P27 was
switched to the above diesel: additive fuel blend. The engine ran from this fuel
10 composition continuously until the end of testing on the following day.

At 10:00 a.m. on Day Two of testing engine # P27 was stabilized at
approximately 293 hp and exactly 1078 rpm while running on the above mentioned
diesel: additive fuel blend. Three full emissions tests were run over the following
consecutive four hours. See attached results in Table J as Column BB.

At 10.30 a.m. on Day Three of testing, Engine # P28 was stabilized at
15 approximately 319 hp and exactly 1200 rpm while running on CA # 2 Diesel fuel.
Three full emissions tests were run over the following consecutive four hours in Table
J as Column CC.

At 3.00 a.m. on Day Four of testing, the fuel source for engine # P28 was
20 switched to the above diesel: additive fuel blend. The engine ran from this fuel
composition continuously until the end of testing on the following day.

At 10:00 a.m. on Day Four of testing engine # P28 was stabilized at
approximately 313 hp and exactly 1177 rpm while running on the above mentioned
diesel: additive fuel blend. Three full emissions tests were run over the following
25 consecutive four hours. See attached results in Table J as Column DD.

No mechanical changes were made to the engines during testing other than
switching fuel source.

CONFIDENTIAL

TABLE J
SUMMARY OF RESULTS

Test Parameters	AA	BB	CC	DD
	Engine P-27 Diesel Baseline	Engine P-27 66/35 Mix	Engine P-28 Diesel Baseline	Engine P-28 66/35 Mix
Gas Temperature, F	587	543	510	486
RPM	1,080	1,078	1,200	1177
Average Flow Rate, dscfm	409	398	836	767
Moisture, %	9.8	11.3	6.9	8.2
Oxygen, dry %	6.1	6.1	11.8	12.8
Carbon dioxide, dry %	10.6	10.4	6.8	6.2
<u>PARTICULATE MATTER (filters only)</u>				
Concentration, gr/dscf	0.028	0.015	0.023	0.008
Emission Rate, lbs/hr	0.099	0.052	0.164	0.055
<u>PARTICULATE MATTER (CARB)</u>	0.056	0.037	0.041	0.021
Concentration, gr/dscf	0.197	0.126	0.294	0.139
Emission Rate, lbs/hr				
<u>OXIDES OF NITROGEN</u>				
Concentration, ppmv	1208	1194	861	839
Emission Rate, lbs/hr as NO2	3.54	3.41	5.16	4.61
Concentration, Corrected to 15% O2	483	477	560	563
<u>CARBON MONOXIDE</u>				
Concentration, ppmv	1097	619	168	81
Emission Rate, lbs/hr	1.96	1.07	0.61	0.27
Concentration, Corrected to 15% O2	438	248	109	54
<u>NON-METHANE HYDROCARBONS</u>				
Concentration, ppmv as O1	5.3	10.1	8.5	9.9
Emission Rate, lbs/hr	0.004	0.007	0.013	0.014
Concentration, Corrected to 15% O2	2.1	4.0	5.5	6.6

Equations: Emission Rate, lb/hr = [Conc. ppm] x [Mol Wt] x [Flow Rate, dscfm] x 1.557E-7
 Concentration, Corrected to 15% O2 = [Conc. ppm] x [5.95/ (20.95-O2 pct)]

These results represent the following significant toxic emissions improvements provided by the diesel: additive fuel composition compared to use of CA # 2 Diesel fuel:

		Engine *P27	Engine *P28
5	Particulates:		
	gr/dscf	46% reduction	65% reduction
	lbs/hr	47% reduction	66% reduction
	Particulates (CARB):		
10	gr/dscf	33.9% reduction	48.8% reduction
	lbs/hr	36% reduction	47% reduction
	Oxides of Nitrogen:		
	ppm	1.2% reduction	2.6% reduction
15	lbs/hr	3.7% reduction	11.7% reduction
	Carbon Monoxide:		
	ppm	44.6% reduction	51.8% reduction
	lbs/hr	45.5% reduction	55.8% reduction

20

Non-Methane Hydrocarbon emissions were negligible for both Diesel fuel and the diesel: additive composition.

Fuel flow in engine # P27 increased from approximately 11 gal/hr to approximately 12 gal/hr, or an increase of 9%.

25 Fuel flow in engine # P28 increased from approximately 14 gal/hr to approximately 15 gal/hr, or an increase of 7%.

When allowance for variations in emissions flow rate, engine power, and fuel flow rate are evaluated, a slight timing change may be recommended for improved power.

30

EXAMPLE 4

a) A confidential test experiment was performed at California Truck Testing Services (CaTTS), a division of Clean Air Vehicle Technology Center (CAVTC), in

Hayward, CA.

CaTTS is located at the Chevron Research and Development Center in Richmond, CA. CaTTS test cell can accommodate vehicles as long as 65 feet. The centerpiece of the cell is a Froude-Consine direct-current electric chassis dynamometer, which consists of two 48-inch roll sets (with a distance from center to center of 53 inches).

The dynamometer tests both single-and tandem-axle vehicles with gross vehicle weight ratings of up to 85,000 pounds at a speed as high as 75 mph. The maximum power absorption at the roll is 500 horsepower. The dynamometer can simulate a wide variety of transient cycles.

The particulate emissions analysis system is a heated primary dilution tunnel, and a secondary tunnel for sample conditioning and particulate measurements.

The test vehicle was a 1984 MACK (Model WS767LT) single axle,
Tractor VIN # WS7671T41238;
Differential: Rockwell R140 4,11:1
Tires: 285R75X24.5 retreads (40" diameter)
Transmission: Fuller RT 910
Engine: 10724613 Cummins NTC, CPL #393, Pump 9217
Rated: 400 hp@2100 rpm
Fuel Pressure: 172-194 psi
Engine flow rate: 139-145 lbs/hr
Injector flow rate: 193 mm/stroke
Intake manifold pressure: 31-39" Hg
Federal Certification Level: 10.6 grams/hp-hr NO_x
The transient test cycle was Code of Federal Regulations (CFR) §86.146-96 from CFR Volume 40 Part 86 (7-1-97 Edition).

This test cycle was a 16-minute urban transient cycle simulating urban conditions for a heavy-duty vehicle. The exact test cycle was repeated for the following fuels:

- 1) Standard CA # 2 Diesel Fuel
- 2) Fuel/Additive Composition #1
- 3) Fuel/Additive Composition #2

- 4) Fuel/Additive Composition #3
- 5) Fuel/Additive Composition #4
- 6) Standard CA #2 Diesel Fuel

The additive formulation for Fuel/Additive Composition #1 was, by parts, by

5 volume:

- | | |
|------------------------------|--------------------------------|
| 30 parts linoleic acid | (Henkel Emersol 315) |
| 10 parts ethoxylated alcohol | (Union Carbide Tergitol 1553) |
| 28 parts methanol | (Gallade Chemical, industrial) |
| 15 parts water | (Standard tap water) |
| 10 4.1 parts aqueous ammonia | (26% BAUM A) |

The additive formulation for Fuel/Additive Composition #2 was, by parts, by

volume:

- | | |
|-----------------------------|--------------------------------|
| 36 parts linoleic acid | (Henkel Emersol 315) |
| 6 parts ethoxylated alcohol | (Union Carbide Tergitol 1553) |
| 15 28 parts methanol | (Gallade Chemical, industrial) |
| 15 parts water | (standard tap water) |
| 4.1 parts aqueous ammonia | (26% BAUM A) |

The added formulation for Fuel/Additive Composition #3 was, by parts, by

volume:

- | | |
|-----------------------------|--------------------------------|
| 20 36 parts linoleic acid | (Henkel Emersol 315) |
| 6 parts ethoxylated alcohol | (Henkel Produce #33240) |
| 28 parts methanol | (Gallade Chemical, industrial) |
| 15 parts water | (standard tap water) |
| 4.1 parts aqueous ammonia | (26% BAUM A) |

25 The additive formulation for Fuel/Additive Composition #4 was, by parts, by

volume:

- | | |
|------------------------------|--------------------------------|
| 30 30 parts linoleic acid | (Henkel Emersol 315) |
| 10 parts ethoxylated alcohol | (Henkel Produce #3324)) |
| 28 parts methanol | (Gallade Chemical, industrial) |
| 30 15 parts water | (Standard tap water) |
| 4.1 parts aqueous ammonia | (26% BAUM A) |

A test cycle was run for each fuel in the order described above. A 10-minute

CONFIDENTIAL

flushing cycle was run between each fuel sample. Clean filter samples were installed at the end of each test run. No changes were made to the truck, the engine, or the chassis dynamometer, except for the change in fuel source.

With reference to Figure 19, experimental results are described above in the

5 Brief Description of the Figures.

EXAMPLE 5

a) Similarly, Examples 3(a) or 4(a) are repeated except that the additive composition is replaced with the additive composition as follows:

10	Linoleic acid:oleic acid, 50:50	32 parts by volume
	any C-8-10 alcohol;	12 parts by volume
	ethanol denatured with methanol	
	or iso-propanol;	28 parts by volume
	water;	16 parts by volume
	aqueous ammonia	4.4 parts by volume

15 Wherein the fuel/additive ratio is about 65:35 to 80:20 and the result of combustion of the resulting fuel additive composition compared to Diesel fuel is improved combustion, reduce carbon buildup inside the engine; reduced smoke, particulates, and noxious gases; reduced unburnt hydrocarbon emissions; where the results are essentially the same as represented in Examples 1(a), 2(a), 3(a) or 4(a).

20 b) Similarly, Examples 3(a) or 4(a) are repeated except that the additive composition is replaced with the additive composition as follows:

	Linoleic acid:oleic acid, 50:50 (v/v)	32 parts by volume
	any C-8-10 alcohol;	12 parts by volume
	ethanol denatured with methanol	
25	or iso-propanol;	28 parts by volume
	water;	8 parts by volume
	aqueous ammonia	4.4 parts by volume

wherein the fuel/additive ratio is about 65:35 to 80:20 (v/v) and the result of combustion of the resulting fuel additive composition compared to Diesel fuel is improved combustion, reduce carbon buildup inside the engine; reduced smoke, particulates, and noxious gases; reduced unburnt hydrocarbon emissions; and fuel efficiency is improved compared to 5(a).

c) Similarly, Examples 3(a) or 4(a) are repeated except that the additive composition is replaced with the additive composition as follows:

	Linoleic acid:oleic acid, 50:50	16 parts by volume
	any C-8-10 alcohol;	16 parts by volume
5	ethanol denatured with	
	iso-propanol;	28 parts by volume
	water;	4 parts by volume
	aqueous ammonia	2.2 parts by volume

where the fuel/additive ratio is about 65:35 to 80:20 and the result of
10 combustion of the resulting fuel additive composition compared to Diesel fuel is improved combustion, reduced carbon buildup inside the engine; reduced smoke, particulates, and noxious gases; reduced unburnt hydrocarbon emissions; and improved storage characteristics compared to Example 5(b) and improved fuel consumption efficiency compared to Example 5(b).

15 d) Similarly, Examples 3(a) or 4(a) are repeated except that the additive composition is replaced with the additive composition as follows:

	Linoleic acid:oleic acid, 50:50	16 parts by volume
	any C-8-10 alcohol;	16 parts by volume
	ethanol denatured with	
20	iso-propanol;	28 parts by volume
	water;	4 parts by volume
	aqueous urea (urea/water, 72/28,v/v)	4.4 parts by volume

where the fuel/additive ratio is about 80:20 to 95:5 and the result of combustion
of the resulting fuel additive composition compared to Diesel fuel is improved
25 combustion, reduced carbon buildup inside the engine; reduced smoke, particulates, and noxious gases; reduced unburnt hydrocarbon emissions; and improved storage characteristics compared to Example 5(c)

e) Similarly, Examples 1(a), 2(a), 3(a) or 4(a) are repeated except that the additive composition is replaced with the additive composition as follows:

30	Linoleic acid:oleic acid, 50:50	8 parts by volume
	any C-8-10 alcohol;	24 parts by volume
	ethanol denatured with	

iso-propanol; 28 parts by volume
water; 4 parts by volume
aqueous ammonia 1.1 parts by volume

where the fuel/additive ratio is about 80:20 to 95:5 and the result of combustion
5 of the resulting fuel additive composition compared to Diesel fuel is improved
combustion, reduced carbon buildup inside the engine; reduced smoke, particulates, and
noxious gases; reduced unburnt hydrocarbon emissions; and improved storage
characteristics compared to Example 5(d)

f) Similarly, Examples 1(a), 2(a), 3(a) or 4(a) are repeated except that the
10 additive composition is replaced with the additive composition as follows:

ethoxylated alcohol 13S3 or 15S3 8 parts by volume
any C-8-10 alcohol; 24 parts by volume
ethanol denatured with
iso-propanol; 28 parts by volume
15 water; 4 parts by volume

where the fuel/additive ratio is about 80:20 to 95:5 and the result of combustion
of the resulting fuel additive composition compared to Diesel fuel is improved
combustion, reduced carbon buildup inside the engine; reduced smoke, particulates, and
noxious gases; reduced unburnt hydrocarbon emissions; and improved storage
20 characteristics compared to Example 5(e).

g) Similarly, Examples 3(a) or 4(a) are repeated except that the additive
composition is replaced with the additive composition as follows:

Any C8-10 alcohol; 28 parts by volume
ethanol denatured with
25 iso-propanol; 28 parts by volume
water; 1.5 parts by volume

where the fuel/additive ratio is about 90:10 to 95:5 and the result of combustion
of the resulting fuel additive composition compared to Diesel fuel is improved
combustion, reduced carbon buildup inside the engine; reduced smoke, particulates, and
30 noxious gases; reduced unburnt hydrocarbon emissions; and improved storage
characteristics compared to Example 5(e).

h) Similarly, Examples 3(a) or 4(a) are repeated except that the additive

composition is replaced with the additive composition as follows:

Any C8-10 alcohol; 28 parts by volume

ethanol denatured with

iso-propanol; 28 parts by volume

- 5 where the fuel/additive ratio is about 90:10 to 95:5 and the result of combustion of the resulting fuel additive composition compared to Diesel fuel is improved combustion, reduced carbon buildup inside the engine; reduced smoke, particulates, and noxious gases; reduced unburnt hydrocarbon emissions; and improved fuel storage characteristics compared to Diesel fuel and compared to Example 5(g).

10

EXAMPLE 6

a) Similarly, Examples 3(a) or 4(a) are repeated except that the additive composition is replaced with the additive composition as follows:

iso-propanol; 10 parts by volume

ethanol 28 parts by volume

- 15 Where the engine is a spark-ignition engine and the fuel is gasoline, and where the fuel/additive ratio is about 90:10 to 95:5, and the result of combustion of the resulting fuel additive composition compared to gasoline is improved combustion, reduced carbon buildup inside the engine; reduced smoke, particulates, and noxious gases; reduced unburnt hydrocarbon emissions.

- 20 b) Similarly, Examples 3(a) or 4(a) are repeated except that the additive composition is replaced with the additive composition as follows:

any C-8-10 alcohol; 6 parts by volume

ethanol denatured with

iso-propanol; 28 parts by volume

- 25 where the engine is a spark-ignition engine and the fuel is gasoline, and where the fuel/additive ratio is about 90:10 to 95:5, and the result of combustion of the resulting fuel additive composition compared to gasoline is improved combustion, reduced carbon buildup inside the engine; reduced smoke, particulates, and noxious gases; reduced unburnt hydrocarbon emissions.

- 30 c) Similarly, Examples 3(a) or 4(a) are repeated except that the additive composition is replaced with the additive composition as follows:

ethoxylated alcohol 13S2 or 15S3; 2 parts by volume

0933331 0119
00110 12332330

ethanol denatured with

iso-propanol;

28 parts by volume

where the engine is a spark-ignition engine and the fuel is gasoline, and where the fuel/additive ratio is about 90:10 to 95:5, and the result of combustion of the resulting fuel additive composition compared to gasoline is improved combustion, reduced carbon buildup inside the engine; reduced smoke, particulates, and noxious gases; reduced unburnt hydrocarbon emissions.

EXAMPLE 7

(a) Similarly, Examples 1(a), 2(a), 3(a) are repeated except that the additive composition and amounts are replaced to be the additive composition as follows:

Fatty acid (linoleic:oleic:myristic:palmitic:

stearic at ratios of 5:5:1:1:1)

44 parts by volume;

water-insoluble alcohol (hexanol:octanol:

decanol:oleyl:myristyl:palmityl at ratios

of 2:4:4:2:1:1)

22 parts by volume;

water-soluble alcohol (methanol:ethanol:

propanol:butanol at ratios of 2:4:2:1)

18 parts by volume;

water

6 parts by volume;

aqueous ammonia (28%)

6 parts by volume,

where the application is industrial or home furnaces and the fuel is heating oil or kerosene, and the fuel additive ratio is about 95:5 to 85:15 and the result of combustion of the resulting fuel/additive composition is reduced smoke, particulates, and noxious gases.

(b) Similarly, Examples 1(a), 2(a), 3(a) are repeated except that the additive composition and amounts are replaced to be the additive composition as follows:

Fatty acid (linoleic:oleic:myristic:palmitic:

stearic at ratios of 5:5:1:1:1)

40 parts by volume;

water-insoluble alcohol (hexanol:octanol:

decanol:oleyl:myristyl:palmityl at ratios

of 2:4:4:2:1:1)

20 parts by volume;

water-soluble alcohol (methanol:ethanol:

propanol:butanol at ratios of 2:4:2:1)

16 parts by volume;

water 4 parts by volume;
aqueous ammonia (28%) 4 parts by volume,

where the application is industrial or home furnaces and the fuel is heating oil or kerosene, and the fuel additive ratio is about 95:5 to 85:15 and the result of combustion
5 of the resulting fuel/additive composition is improved combustion, reduced carbon buildup inside the furnace and further reduced smoke, particulates, and noxious gases.

(c) Similarly, Examples 1(a), 2(a), 3(a) are repeated except that the additive composition and amounts are replaced to be the additive composition as follows:

Fatty acid (linoleic:oleic:myristic:palmitic:
10 tearic at ratios of 5:5:1:1:1) 36 parts by volume;
water-insoluble alcohol (hexanol:octanol:
decanol:oleyl:myristyl:palmityl at ratios
of 2:4:4:2:1:1) 18 parts by volume;
water-soluble alcohol (methanol:ethanol:
15 propanol:butanol at ratios of 2:4:2:1) 24 parts by volume;
water 12 parts by volume;
aqueous ammonia (28%) 4.9 parts by volume,

where the application is industrial or home furnaces and the fuel is heating oil or kerosene, and the fuel additive ratio is about 90:10 to 75:25 and the result of
20 combustion of the resulting fuel/additive composition is improved combustion, reduced carbon buildup inside the furnace and further reduced smoke, particulates, and noxious gases compared to compositions having a lower additive proportion.

(d) Similarly, Examples 1(a), 2(a), 3(a) are repeated except that the additive composition and amounts are replaced to be the additive composition as follows:

25 Fatty acid (linoleic:oleic:myristic:palmitic:
tearic at ratios of 5:5:1:1:1) 34 parts by volume;
water-insoluble alcohol (hexanol:octanol:
decanol:oleyl:myristyl:palmityl at ratios
of 2:4:4:2:1:1) 16 parts by volume;
30 water-soluble alcohol (methanol:ethanol:
propanol:butanol at ratios of 2:4:2:1) 20 parts by volume;
water 9 parts by volume;

aqueous ammonia (28%) 4.6 parts by volume,

where the application is industrial or home furnaces and the fuel is heating oil or kerosene, and the fuel additive ratio is about 90:10 to 75:25 and the result of combustion of the resulting fuel/additive composition is improved combustion, reduced carbon buildup inside the furnace and further reduced smoke, particulates, and noxious gases compared to compositions having a lower additive proportion..

(e) Similarly, Examples 1(a), 2(a), 3(a) are repeated except that the additive composition and amounts are replaced to be the additive composition as follows:

	Fatty acid (linoleic:oleic:myristic:palmitic:	
10	tearic at ratios of 5:5:1:1:1)	32 parts by volume;
	water-insoluble alcohol (hexanol:octanol:	
	decanol:oleyl:myristyl:palmityl at ratios	
	of 2:4:4:2:1:1)	16 parts by volume;
	water-soluble alcohol (methanol:ethanol:	
15	propanol:butanol at ratios of 2:4:2:1)	28 parts by volume;
	water	15 parts by volume;
	aqueous ammonia (28%)	4.9 parts by volume,

where the application is industrial or home furnaces and the fuel is heating oil or kerosene, and the fuel additive ratio is about 80:20 to 65:35 and the result of combustion of the resulting fuel/additive composition is improved combustion, reduced carbon buildup inside the engine and reduced noxious gases and remarkably reduced smoke and particulate emissions.

(f) Similarly, Examples 1(a), 2(a), 3(a) are repeated except that the additive composition and amounts are replaced to be the additive composition as follows:

25	Fatty acid (linoleic:oleic:myristic:palmitic:	
	tearic at ratios of 5:5:1:1:1)	28 parts by volume;
	water-insoluble alcohol (hexanol:octanol:	
	decanol:oleyl:myristyl:palmityl at ratios	
	of 2:4:4:2:1:1)	10 parts by volume;
30	water-soluble alcohol (methanol:ethanol:	
	propanol:butanol at ratios of 2:4:2:1)	24 parts by volume;
	water	10 parts by volume;

aqueous ammonia (28%) 3.8 parts by volume,

where the application is industrial or home furnaces and the fuel is heating oil or kerosene, and the fuel additive ratio is about 80:20 to 65:35 and the result of combustion of the resulting fuel/additive composition is improved combustion, reduced carbon buildup inside the furnace and reduced noxious gases and remarkable reduced smoke and particulate emissions.

(g) Similarly, Examples 1(a), 2(a), 3(a) are repeated except that the additive composition and amounts are replaced to be the additive composition as follows:

Fatty acid (linoleic:oleic:myristic:palmitic:
10 tearic at ratios of 5:5:1:1:1) 24 parts by volume;
water-insoluble alcohol (hexanol:octanol:
decanol:oleyl:myristyl:palmityl at ratios
of 2:4:4:2:1:1) 8 parts by volume;
water-soluble alcohol (methanol:ethanol:
15 propanol:butanol at ratios of 2:4:2:1) 24 parts by volume;
water 10 parts by volume;
aqueous ammonia (28%) 4.4 parts by volume,

where the application is industrial or home furnaces and the fuel is heating oil or kerosene, and the fuel additive ratio is about 65:35 to 50:50 and the result of combustion of the resulting fuel/additive composition is improved combustion, reduced carbon buildup inside the furnace and reduced noxious gases and remarkably reduced smoke and particulate emissions.

DIAGNOSTIC SELECTION PROCESS--In another aspect, a diagnostic process was found which makes it possible for one of skill in the art to identify quickly components and quantities of an additive which when combined with a combustible fuel produces a clear stable micro-emulsion is needed in commercial application to improve combustion.

EXAMPLE A

DIAGNOSTIC TESTS WITH ADDITIVE COMPOSITIONS

a) Confidential test experiments were performed at 534 Ashbury Street, San Francisco, CA.

5 The glassware used were standard glass and pyrex beaker, graduated cylinders, pipettes, erlenmeyer flasks and 4 oz. boston round bottles purchased from VWR Scientific Products in San Francisco, CA and from Bryant Laboratory, Inc. in Berkeley, CA.

The beakers were of the general description PYREX brand Double Scale Griffin Beakers, graduated, 30, 50, 100 and 250 ml capacity Corning Nos. 1000-30, 1000-50,
10 1000-100 and 1000-250.

The graduated cylinders were of the general description Graduated Cylinders Single metric Scale White line, 10, 25, and 50 ml capacity with milliliter divisions of 0.2, 0.5, and 1.0 respectively.

The pipettes were of the general description KIMAX-51 Measuring (Mohr)
15 Pipets, reusable, Class B, Color-Coded, SAFE-Gard tempered tip, intended for chemical laboratory work, 1 ml and 5 ml capacity.

The Erlenmeyer flasks were of the general description PYREX brand, Erlenmeyer, Narrow Mouth, Graduated Flask, 100 ml and 250 ml capacity.

The Boston round bottles were of the general description Boston Round Bottles,
20 Narrow Mouth, Qorpak, with Polyseal-lined black phenolic caps, 120 ml (4 oz) capacity.

Chemical components used in the following experiments were generally supplied as samples by chemical companies such as Henkel Corporation, of Cincinnati, OH; and Union Carbide, of Chicago, IL; or as generally-sold products from Gallade
25 Chemical, Inc. of Newark, CA; VWR Scientific of San Francisco, CA; and Bryant Laboratory, Inc. of Berkeley, CA.

All laboratory equipment was used exactly as shipped from the above mentioned suppliers; and all chemical components were used exactly as shipped from the above mentioned suppliers, with no further purification or other alterations.

30 CA #2 Diesel fuel was purchased from standard public Diesel fuel distributors in San Francisco, from standard gas station pumps.

Where the following components were added in the following order to a 250 ml

Erlenmeyer flask:

34 ml linoleic acid (Henkel Corporation product Emersol 305)

6 ml octanol (Henkel Corporation product # 3324)

28 ml methanol (Gallade Chemical, Inc. technical grade)

5 gentle swirling produced Freuhoffer lines and then a clear solution, to which was added:

14.6 ml water (standard tap water)

gentle swirling produced a white, milky solution, to which was added, by pipette:

4.6 ml aqueous ammonia (Gallade Chemical, Inc. Baum A 26%)

an immediate exothermic reaction took place, producing mild heat and immediate

10 visual change of the solution from milky to clearing; where gentle swirling produced complete clearing of the mixture.

A 120 ml (4 oz) boston bottle was then partially filled with

80 mls diesel fuel (CA standard #2 Diesel fuel)

to which was added:

15 20 ml of the above clear fatty acid/alcohol/water/ammonia composition;

gentle swirling produced a clear, microemulsion composition that remained stable over time after 6 months the microemulsion is still clear, and stable although fatty acid degradation has caused a color change from no color to light amber color).

20 This 100 ml microemulsion sample was then stored overnight at 20°C in a standard home freezing unit, where freezer temperature was measured using a standard freezer thermometer such as can be purchased in a hardware store.

On immediate removal from the freezing unit, the microemulsion composition showed partial 'slushy' solidification, similar or identical to solification of 100 mis of 100% Diesel fuel stored simultaneously in the same freezing unit.

25 After ten minutes, the microemulsion composition and the 100% Diesel fuel thawed entirely, returning to a clear, liquid state. The microemulsion composition showed no visible signs of phase separation.

b) Similarly, Example A(a) is repeated except that the additive composition and amounts are replaced to be the additive composition as follows:

30	50/50 linoleic acid/oleic	32	parts by volume
	C8-10 alcohol;	16	parts by volume
	methanol;	28	parts by volume

water; 12 parts by volume
aqueous ammonia 3.3 parts by volume

where the fuel/additive ratio is about 65:35 to 95:5 and the result of mixing by gentle swirling produces an exothermic reaction, and a clear microemulsion

5 composition that remains stable over time, up to 6 months or longer, and during and after storage at a temperature of -20°C, where fatty acids will show discoloration and other signs of oxidation over time.

c) Similarly, Example A(a) is repeated except that the additive composition and amounts are replaced to be the additive composition as follows:

10 50/50 linoleic acid/oleic 24 parts by volume
C8-10 alcohol; 16 parts by volume
methanol; 28 parts by volume
water; 8 parts by volume
aqueous ammonia 3.3 parts by volume

15 where the fuel/additive ratio is about 65:35 to 95:5 and the result of mixing by gentle swirling produces an exothermic reaction, and a clear microemulsion composition that remains stable over time, up to 6 months or longer, and during and after storage at a temperature of -20°C, where the fuel/additive composition will show discoloration or other signs of oxidation from fatty acids over time compared to

20 Examples A(a) and A(b).

d) Similarly, Example A(a) is repeated except that the additive composition and amounts are replaced to be the additive composition as follows:

25 50/50 linoleic acid/oleic 16 parts by volume
C8-10 alcohol; 16 parts by volume
ethanol denatured with methanol; 28 parts by volume
water; 4 parts by volume
aqueous ammonia 2.2 parts by volume

where the fuel/additive ratio is about 65:35 to 95:5 and the result of mixing by gentle swirling produces an exothermic reaction, and a clear microemulsion
30 composition that remains stable over time, up to 6 months or longer, and during and after storage at a temperature of -20°C, where the fuel/additive composition will show significantly less discoloration or other signs of oxidation from fatty acids over time

compared to Examples A(a), A(b) and A(c).

e) Similarly, Example A(a) is repeated except that the additive composition and amounts are replaced to be the additive composition as follows:

	50/50 linoleic acid/oleic	16	parts by volume
5	C8-10 alcohol;	16	parts by volume
	ethanol denatured with methanol;	28	parts by volume
	water;	4	parts by volume
	aqueous urea	4.4	parts by volume

where the fuel/additive ratio is about 65:35 to 95:5 and the result of mixing by gentle swirling produces an exothermic reaction, and a clear microemulsion composition that remains stable over time, up to 6 months or longer, and during and after storage at a temperature of -20°C, and the nitrogen content of the fuel/additive composition is increased compared to Example A(d).

f) Similarly, Example A(a) is repeated except that the additive composition and amounts are replaced to be the additive composition as follows:

	50/50 linoleic acid/oleic	8	parts by volume
	ethoxylated alcohols 13S3 or 15S3	8	parts by volume
	C8-10 alcohol;	16	parts by volume
	ethanol denatured with methanol;	28	parts by volume
20	water;	4	parts by volume
	aqueous ammonia	2.2	parts by volume

where the fuel/additive ratio is about 65:35 to 95:5 and the result of mixing by gentle swirling produces an exothermic reaction, and a clear microemulsion composition that remains stable over time, up to 6 months or longer, and during and after storage at a temperature of -20°C, where fuel/additive composition will show further reduction of discoloration and other signs of oxidation from fatty acids over time compared to Examples A(a), A(b), A(c), A(e) and A(d).

g) Similarly, Example A(a) is repeated except that the additive composition and amounts are replaced to be the additive composition as follows:

30	ethoxylated alcohols 13S3 or 15S3	16	parts by volume
	C8-10 alcohol;	16	parts by volume
	ethanol denatured with methanol;	28	parts by volume

water; 4 parts by volume

where the fuel/additive ratio is about 65:35 to 95:5 and the result of mixing by gentle swirling produces a clear microemulsion composition (with no discernable exothermic reaction) that remains stable over time, up to 6 months or longer, and
5 during and after storage at a temperature of -20°C, where no discoloration or other signs of oxidation occur over time.

h) Similarly, Example A(a) is repeated except that the additive composition and amounts are replaced to be the additive composition as follows:

10 C8-10 alcohol; 32 parts by volume
ethanol denatured with iso-propanol; 28 parts by volume
water; 2 parts by volume

where the fuel/additive ratio is about 65:35 to 95:5 and the result of mixing by gentle swirling produces a clear microemulsion composition (with no discernable exothermic reaction) that remains stable over time, up to 6 months or longer, and
15 during and after storage at a temperature of -20°C, where no discoloration or other signs of oxidation occur over time and no ethylene oxides are present in the fuel/additive.

i) Similarly, Example A(a) is repeated except that the additive composition and amounts are replaced to be the additive composition as follows:

20 C8-10 alcohol; 24 parts by volume
anhydrous ethanol
denatured with iso-propanol; 28 parts by volume

where the fuel/additive ratio is about 65:35 to 95:5 and the result of mixing by gentle swirling produces a clear microemulsion composition (with no discernable
25 exothermic reaction) that remains stable over time, up to 6 months or longer, and during and after storage at a temperature of -20°C, where no discoloration or other signs of oxidation occur over time and no ethylene oxides are present in the fuel/additive.

093331 0449
66770 123320

EXAMPLE B

DETERMINING SURFACE ACTIVITY STRENGTH OF VARIOUS
WATER-INSOLUBLE ALCOHOLS

Experiments # 1,2,3, & 4 all begin with 32 mls anhydrous ethanol to which is
5 added 32 mls of the following alcohols:

- | | | |
|-----|------------------------------------|------------------|
| # 1 | 98% pure C8 alcohol | (straight chain) |
| # 2 | combination C8 and C10 alcohols | (straight chain) |
| # 3 | combination C6 through 12 alcohols | (straight chain) |
| # 4 | 2-ethyl-hexanol-1 | (branched chain) |

10 Alcohols 1,2,3 and 4 mixed readily with ethanol, but for all of them, mixing is not considered complete until Freuhoffer lines disappear. This happens with very gentle swirling of the beaker or stirring.

80 mls of CA # 2 Diesel fuel was then poured into four separate clean beakers and 20 mls of each of the above ethanol/water-insoluble alcohol combinations were
15 added, one mixture to each beaker.

1 C8 alcohol was hazy at first, but after gentle "sloshing" or swirling, the mixture was perfectly clear.

Hundreds of previous experiments have proven that once the mixture has gone clear, it is stable and will remain stable at temperatures of -20°C or lower.

20 Therefore, 98% pure, straight-chain C8 alcohol, can be used by itself as the only necessary surfactant when introducing anhydrous ethanol into Diesel fuel.

2 The C8-10 alcohol combination was hazy at first, but cleared almost immediately with the slightest agitation. There was a quality of instantaneous clearing that the C8 alcohols lacked, but was quite evident in this experiment.

25 Previous experiments have shown that this instant clearing quality indicates superior surface activity. This superior performance manifests not so much in a 'more stable solution' (once the solution is clear, it is stable), but that the superior solution will tolerate components that are more hydrophilic than anhydrous ethanol (i.e. methanol, water) and still remain stable.

30 Therefore, the combination straight-chain C8-10 can be used by itself as the only necessary surfactant when introducing anhydrous ethanol into Diesel fuel and is a superior surfactant to 98% pure C8 alcohol.

3 The C6-12 alcohol combination was completely hazy at first, meaning that there was an opaque quality to the solution rather than a more pearly quality evident in the previous two experiments.

5 This opaque quality usually signifies that there is 'a long way to go' before the surface activity is strong enough to produce a clear solution. Swirling, sloshing, shaking did nothing to promote clearing.

Previous experiments have shown that if a solution does not clear, it will eventually show phase separation, sometimes slowly at room temperature, but very quickly at lower temperatures.

10 Therefore, the combination straight-chain C6-12 alcohol cannot be used by itself as the only necessary surfactant when introducing anhydrous ethanol into Diesel fuel. By inference, it is also true that C6-12 alcohols will not tolerate components that are more hydrophilic than anhydrous ethanol.

4 The branched chain 2-ethyl-1-hexanol solution was hazy at first, but
15 possessed the pearly quality observed in experiments 1 and 2. Swirling did not produce immediate clearing, but over time (4 minutes) the solution cleared on its own with no further agitation. Swirling produced a slightly hazy quality again, but standing for one more minute, the solution became perfectly clear and remained clear.

Previous experiments have shown that this 'delay' quality indicates relatively
20 weak surface activity compared to components that produce immediately clear results. This inferior performance manifests not so much in a 'less stable solution' (once the solution is clear, it is stable), but that the inferior solution will not tolerate components that are more hydrophilic than anhydrous ethanol, but will benefit from higher concentrations of the surface active component.

25 Therefore, the branched chain 2-ethyl-hexanol-1 can be used by itself as the only necessary surfactant when introducing anhydrous ethanol into Diesel fuel, but is not as strong a surfactant as either the C8 alcohol or the C8-10 alcohols combination.

6670728260

REDUCE OCTANOL SERIES USING C8, C8-10, C6-12 and 2EH-1

	<u># 1</u>	<u># 2</u>	<u># 3</u>	<u># 4</u>
	37. Ethanol	32. Ethanol	32. Ethanol	32. Ethanol
	32. Henkel 3324	32. Henkel 3328	32. Henkel 3393	32. Baker
5	<u>C8 Alcohol</u>	<u>C8-10 Alcohol</u>	<u>C6-12 Alcohol</u>	<u>2EH1</u>
	80 ml Diesel	80 ml Diesel	80 ml Diesel	80 ml Diesel
	20 ml # 1	20 ml # 2	20 ml # 3	20 ml # 4
	Hazy at first	Hazy at first	Completely hazy	Hazy
	___Shaking	___Clearing	Sloshing, Shaking	But almost
10	Perfectly clear	Almost immediately	No change	Clearing
	---	Gentle slosh	Stays hazy	Perfectly
	---	Instant Clear	---	Over time
	---	---	---	(4 min)
	---	---	5 minutes	CLEAR!
15	---	---	Enter Pearly	SLIGHTLY PERSISTENT

NEXT SERIES: Beakers have the following amounts remaining in them:

	<u># 1A</u>	<u># 2A</u>	<u># 3A</u>	<u># 4A</u>
	22. Ethanol	22. Ethanol	22. Ethanol	22. Ethanol
20	22. Henkel 3324	22. Henkel 3328	22. Henkel 3393	22. Baker
	<u>C8 Alcohol</u>	<u>C8-10 Alcohol</u>	<u>C6-12 Alcohol</u>	<u>2EH1</u>
	Add 7 ethanol	Add 7 ethanol	Add 7 of C6-12 alcohol	Add 7 ml 2EH1
	80 ml Diesel	80 ml Diesel	80 ml Diesel	80 ml Diesel
	20 ml # 1A	20 ml # 2A	20 ml # 3A	20 ml # 4A
25	Hazy, period	Hazy, period	Hazy	Clear immediately

EXAMPLE C

VERIFICATION OF SUPERIOR SURFACE ACTIVITY OF
LINOLEIC ACID WITH AMMONIA

Experiments # 1 and # 2 both begin with 32 mls 5% aqueous ethanol to which is
5 added:

1 28 mls C8-10 alcohol
4 mls linoleic acid
5 mls aqueous ammonia (28% ammonia/72% water)

10 # 2 32 mls C8-10

Note that, as closely as possible, the ethanol: total surfactant ratio is 1:1 for both experiments.

1

15 Aqueous ethanol and C8-10 alcohol mix fairly readily, where Freuhoffer lines are visible until mixing is complete.

The addition of linoleic acid produced a milky solution.

The addition of aqueous ammonia produces instant clearing and heat.

20 When 20 mls of this mixture is added to 80mls of CA #2 Diesel Freuhoffer lines are evident (Freuhoffer lines are not the same as 'haze', but are clear, oily, lines that resemble smoke wisps). Then the mixture goes perfectly clear, signifying as mentioned above, that the composition is stable.

25 Previous experiments have shown that linoleic acid and ammonia, together, are a potent (antonic) surfactant that can be depended on to produce stable micro-emulsions, even in the presence of large quantities of very hydrophilic components, namely, methanol and water.

#2

Aqueous ethanol and C8-10 alcohol mixed readily as above.

When 20 mls of this mixture is added to 80mls of CA#2 Diesel the composition exhibits a very fine haze first, and then clears.

30 However, previous experiments have shown that the initial haze signifies weaker surface activity than in the experiment where linoleic acid with ammonia did not exhibit any hazy quality when mixed with Diesel fuel.

EXAMPLE D

VERIFICATION OF SUPERIOR SURFACE ACTIVITY OF
C8-10 ALCOHOL COMBINATION OVER 2EH-1

Experiments #1 and #2 both begin with 32 mis anhydrous methanol to which is
5 added:

#1 32 mls C8-10 alcohol combination

#2 32 mls 2 ethyl hexanol 1

Alcohols 1 and 2 mixed readily with the methanol, but mixing is not considered
complete until Freuhoffer lines disappear. This happens with very gentle swirling of
10 the beaker or stirring.

80 mls of CA #2 Diesel fuel was then poured into each of two separate clean
beakers and 20 mls of each of the above alcohol combinations were added respectively,
one mixture to each beaker.

#1

15 The C8-10 alcohol mixture was pearly, hazy at first. It was almost clear,
but there is a definite moment when a mixture becomes really clear. It is
only then that the mixture can be considered stable.

After 4 minutes, with gentle swirling, the haze had diminished
significantly, but not until 5 minutes later that the solution became
20 completely clear.

Therefore, while C8-10 alcohol can be used by itself as the only necessary
surfactant when introducing anhydrous methanol into Diesel fuel, it is not
ideal for this application, and would benefit from the presence of a stronger
surfactant, such as linoleic with ammonia, as described above.

25 #2

2-ethyl hexanol-1 was cloudy (not hazy) at first, meaning opaque and
definitely not leaning toward clearing. Swirling, sloshing, stirring did
nothing to promote clearing.

Therefore, 2FH-1 alcohol cannot be used by itself in this ratio as the only
30 necessary surfactant when introducing anhydrous methanol into Diesel fuel
and is proven to be a weaker surfactant than the C8-10 combination.

EXAMPLE E
BENEFIT OF INCREASING SURFACE ACTIVE COMPONENT
WHEN USING RELATIVELY WEAK SURFACTANT

#2A

5 5 additional mls of 2-ethylhexanol-1 (2EH-1) were added to the remaining
#2 alcohol mixture, above, producing a methanol 22.27 2EH-1 mixture.
20 mls of this mixture was then added to a beaker with 80ml of CA Diesel
fuel.

10 The mixture went clear immediately, illustrating that comparatively weak
surfactants benefit from an increase in the ration of surfactant to water
soluble alcohol.

15 The many Examples described herein above may use water as a component. It
is to be understood in the many examples that when the water content is reduced by
half, by quarter or by 90%, equal or better results in combustion improvement are
obtained.

20 While only a few embodiments of the invention have been shown and described
herein, it will become apparent to those skilled in the art that various modifications and
changes can be made in the present invention to the present additive composition to
produce fuel/additive microemulsions with a combustible fuel, without departing from
the spirit and scope of the present invention. All such modification and changes
coming within the scope of the appended claims are intended to be carried out thereby.


I CLAIM:

1. An additive composition for a combustible fuel, which is also used as a fuel composition, to utilize readily available and renewable resources, to improve liquid combustible fuel properties, reduce undesirable elements such as sulphur, aromatic hydrocarbons, and glycerine from the content of the fuel, produce improved combustion, and to reduce visible smoke, particulates and other noxious emissions production of the combusted fuel, which additive or fuel composition comprises:
- a. one or more alcohols selected from the group consisting of water-soluble alcohols:
- (i) having between about 1 and 2 carbon atoms, selected from the group consisting of methanol and ethanol in an anhydrous state or as a 0.5-36% aqueous solution by volume; or
- (ii) having between about 3 and 5 carbon atoms, selected from the group consisting of propanol, iso-propanol, butanol, and pentanol by volume or combinations of (a)(i) and a(ii); and
- optionally one or more of the following:
- b. one or more alcohols selected from the group consisting of:
- (i) straight or branched chain, saturated or unsaturated alcohols, which are clear and liquid at room temperature, and having between about 6 and 12 carbon atoms,
- or
- (ii) straight- or branched-chain, saturated or unsaturated long-chain fatty alcohols, which are solid at room temperature, having from between about 13 and 18 carbon atoms, or combinations of (b)(i) and (b)(ii);
- c. one or more ethoxylated alcohols selected from the group consisting of alcohols having between 6 and 18 carbon atoms, where the ethylene oxide add-on is less than 5 moles (units);
- d. a fatty acid of the structure $R-(C=O)-OH$, wherein R is selected from alkyl, alkenyl or alkynyl having between about 10 to 24 carbon atoms, with
- e. a source of nitrogen in an anhydrous state or as an aqueous solution selected from the group consisting of the ammonia, hydrazine, alkyl hydrazine, dialkyl hydrazine, urea, ethanolamine, monoalkyl ethanolamine, and dialkyl ethanolamine wherein alkyl is independently selected from methyl, ethyl, n-propyl or isopropyl, wherein trialkylamines are excluded;


wherein components a and one or more of b, c, d, and e, when combined with mixing with combustible fuel form a clear, stable microemulsion having a viscosity similar to that of the liquid combustible fuel, and where the ratio of combustible fuel: additive ranges from about 99:1 to 0:100 by volume;

- 5 wherein said additive/fuel composition excludes ethylene glycol, glycerine, polyethylene, polypropylene, aromatic organic compounds, sulfur, sulfur compounds, metals, metal compounds, compounds of phenanthrene, and emulsifiers of the general formula:

10

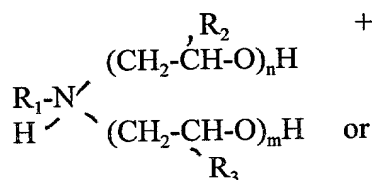

15



20

wherein R_1 and R_4 each independently is a saturated or unsaturated, straight-chain or branched hydrocarbon aliphatic radical each of 4 to 24 carbon atoms (e.g., alkyl or alkenyl) or R_4 is alkylphenyl of 1 to 18 carbon atoms in the optionally branched alkyl chain or H; R_2 , R_3 and R_5 each independently represent a methyl group or H, n plus m is an integer from 1 to 20; z is an integer from 0 to 15; and X is $-\text{COO}(-)$ or $-\text{OCH}_2\text{COO}(-)$, wherein, substituents R_2 , R_3 and R_5 are the same or different in different monomer units of each chain, and optionally other organic diacids are excluded.

25

2. The additive composition of claim 1 wherein:

- a. one or more alcohols selected from the group consisting of water-soluble alcohols having between about 1 and 2 carbon atoms as defined herein in (a)(i), in an anhydrous state or as a 0.5-10% aqueous solution; and

30

- b. one or more alcohols selected from the group consisting of water-soluble alcohols having between about 3 and 5 carbon atoms as defined herein in (a)(ii),

wherein components a and b, when combined with mixing with the refined combustible fuel, form a clear stable solution or microemulsion having a viscosity

- 35 similar to that of the liquid combustible fuel and where the ratio of combustible fuel:

additive ranges from about 99:1 to 1:99 by volume.

3. The additive composition of claim 1 wherein:

a) one or more alcohols selected from the group consisting of water-soluble alcohols having between about 1 and 2 carbon atoms as defined herein in a(i) in an anhydrous state or as a 0.5-5% aqueous solution;

b) one or more alcohols selected from the group consisting of alcohols, iso-propanol and butanol:

wherein components a and b, are present in a:b ratios from about 80:20 and 99:1 by volume wherein components a and b, when combined with mixing with the combustible fuel form a clear, stable microemulsion having a viscosity similar to that of the liquid combustible fuel, and where the ratio of combustible fuel: additive ranges from about 90:10 to 95:5 by volume.

4. The additive composition of claim 1 wherein:

a. one or more alcohols selected from the group consisting of water-soluble alcohols having between about 1 and 5 carbon atoms as defined herein in an anhydrous state or as a 0.5-20% aqueous solution;

b. one or more alcohols selected from the group consisting of clear, liquid saturated or unsaturated, straight- or branched-chain, alcohols having between about 6 and 12 carbon atoms,

wherein components a and b, are present in a:b ratios ranging from about 3:1 and 1:3, wherein components a and b, when combined with mixing with combustible fuel form a clear, stable microemulsion having a viscosity similar to that of the liquid combustible fuel, and where the ratio of combustible fuel: additive ranges from about 99:1 to 1:99 by volume.

5. The additive composition of claim 1 wherein:

a. one or more alcohols selected from the group consisting of water-soluble alcohols having between about 1 and 5 carbon atoms as defined herein in an anhydrous state or as a 5% aqueous solution denatured with iso-propanol, butanol or combinations thereof;

b. one or more alcohols selected from the group consisting of clear, liquid saturated or unsaturated, straight- or branched-chain alcohols having from between about 6 and 12 carbon atoms;

wherein components a and b, are present in a:b ratios ranging from 3:1 and 1:1 by volume wherein components a and b, when combined with mixing with the combustible fuel form a clear, stable microemulsion having a viscosity similar to that of the liquid combustible fuel, and where the ratio of combustible fuel: additive ranges

5 from about 80:20 to 99:1 by volume.

6. The additive composition of claim 1 wherein:

a. one or more alcohols selected from the group consisting of water-soluble alcohols having between about 1 and 5 carbon atoms as defined herein, in an anhydrous state or as a 0.5-20% aqueous solution; and

10 b. one or more alcohols selected from the group consisting clear, liquid saturated or unsaturated, straight- or branched-chain alcohols having from between about 6 and 18 carbon atoms; and

c. one or more alcohols selected from the group consisting of ethoxylated alcohols having between about 6 and 18 carbon atoms, where the ethylene oxide add-on

15 is less than 5 moles;

wherein components a, b, and c are present in a:b:c ratios ranging from about 4:1:1 and 1:4:4 by volume, wherein components a, b, and c when combined with mixing with the combustible fuel, form a clear, stable microemulsion having a viscosity similar to that of the liquid combustible fuel, and where the ratio of combustible fuel:

20 additive ranges from about 99:1 to 1:99 by volume.

7. The additive composition of claim 1 wherein:

a. one or more alcohols selected from the group consisting of water-soluble alcohols having between about 1 and 5 carbon atoms as defined herein in an anhydrous state or as a 0.5-20% aqueous solution;

25 b. one or more alcohols selected from the group consisting of clear, liquid saturated or unsaturated, straight- or branched-chain alcohols having from between about 6 and 12 carbon atoms;

c. one or more alcohols selected from the group consisting of ethoxylated alcohols having between about 12 and 16 carbon atoms, where the ethylene oxide add-on is less than 5 moles;

30

wherein components a, b, and c are present in a:b:c ratios ranging from about 4:1:1 and 1:4:4 by volume, and more preferably between about 4:1:1 and 4:2:1 by volume wherein components a, b, and c when combined with mixing with combustible

fuel, form a clear, stable microemulsion having a viscosity similar to that of the liquid fossil fuel, and where the ratio of combustible fuel:additive ranges from between about 80:20 and 99:1 by volume.

8. The additive composition of claim 1 wherein:

5 a. one or more alcohols selected from the group consisting of water-soluble alcohols having between about 1 and 5 carbon atoms as defined herein in an anhydrous state or as a 0.5 to 20% aqueous solution; and

b. one or more alcohols selected from the group consisting of alcohols having between about 6 and 18 carbon atoms, ethoxylated where the ethylene oxide
10 add-on is less than 5 moles;

wherein components a and b are present in a:b ratios ranging from between 3:1 and 1:2 by volume, wherein components a and b when combined with mixing with the combustible fuel form a clear, stable microemulsion having a viscosity similar to that of the liquid combustible fuel, and where the ratio of combustible fuel: additive ranges
15 from about 99:1 to 1:99 by volume.

9. The additive composition of claim 1 wherein:

a. one or more alcohols selected from the group consisting of water-soluble alcohols having between about 1 and 5 carbon atoms as defined herein in an anhydrous state or as a 0.5-20% aqueous solution or combinations thereof;

20 b. one or more alcohols selected from the group consisting of alcohols having between about 6 and 12 carbon atoms ethoxylated where the ethylene oxide add-on 3 moles;

wherein components a and b are present in a:b ratios ranging from 3:1 and 1:2 by volume, and more preferably between about 3:1 and 2:1 by volume, wherein
25 components a and b when combined with mixing with the combustible fuel form a clear, stable microemulsion having a viscosity similar to that of the liquid combustible fuel, and where the ratio of combustible fuel: additive ranges from about 65:35 to 99:1.

10. The additive composition of Claim 1 wherein:

a. one or more alcohols selected from the group consisting of water-soluble
30 alcohols having between about 1 and 5 carbon atoms as defined herein in an anhydrous state or as a 0.5-20% aqueous solution or combinations thereof;

b. one or more alcohols selected from the group consisting of clear, liquid saturated or unsaturated, straight- or branched-chain alcohols having from between

about 6 and 12 carbon atoms, and

c. a fatty acid of the structure $R-(C=O)-OH$, wherein R is selected from alkyl, alkenyl or alkynyl having from about 10 to 24 carbon atoms;

d. a source of nitrogen in an anhydrous state or as an aqueous solution
5 selected from the group consisting of the ammonia, hydrazine, alkyl hydrazine, dialkyl hydrazine, urea, ethanolamine, monoalkyl ethanolamine, and dialkyl ethanolamine wherein alkyl is independently selected from methyl, ethyl, n-propyl or iso-propyl, wherein trialkylamines are excluded; sufficient to neutralize between about 40 to 85 percent of the fatty acid of subpart c;

10 wherein components a, b, and c are present in a:b:c ratios ranging from about 4:1:1 and 1:4:4; by volume, wherein components a, b, c and d when combined with mixing with said combustible fuel form a clear, stable microemulsion having a viscosity similar to that of the liquid combustible fuel, and where the ratio of combustible fuel: additive ranges from about 80:20 and 99:1 by volume.

15 11. The additive composition of claim 1 wherein:

a. one or more alcohols selected from the group consisting of water-soluble alcohols having between about 1 and 5 carbon atoms as defined herein in an anhydrous state or as a 0.5-36% aqueous solution; and

b. one or more alcohols selected from the group consisting of alcohols
20 having between 6 and 18 carbon atoms, ethoxylated where the ethylene oxide add-on is 3 moles; and

c. a fatty acid of the structure $R-(C=O)-OH$, wherein R is selected from alkyl, alkenyl or alkynyl having from about 10 to 24 carbon atoms; and

d. a source of nitrogen in an anhydrous state or as an aqueous solution
25 selected from the group consisting of the ammonia, hydrazine, alkyl hydrazine, dialkyl hydrazine, urea, ethanolamine, monoalkyl ethanolamine, and dialkyl ethanolamine wherein alkyl is independently selected from methyl, ethyl, n-propyl or isopropyl, wherein trialkylamines are excluded,

wherein components a, b, and c are present in a:b:c ratios ranging from about 5:1:1
30 and 1:4:4 by volume; wherein components a, b, c, and d when combined with mixing with the combustible fuel, form a clear, stable microemulsion having a viscosity similar to that of the liquid combustible fuel, and where the ratio of combustible fuel: additive ranges from about 99:1 to 1:99 by volume.

0923331 0119
66770 7232260

12. The additive composition of claim 1 wherein:

a. one or more alcohols selected from the group consisting of water-soluble alcohols having between about 1 and 5 carbon atoms as defined herein in an anhydrous state or as a 0.5-20% aqueous solution or combinations thereof;

5 b. one or more alcohols selected from the group consisting of ethoxylated alcohols having between about 12 and 16 carbon atoms, where the ethylene oxide add-on is 3 moles;

c. a fatty acid of the structure $R-(C=O)-OH$, wherein R is selected from alkyl, alkenyl or alkynyl having from about 10 to 24 carbon atoms;

10 d. a source of nitrogen in an anhydrous state or as an aqueous solution selected from the group consisting of the ammonia, hydrazine, alkyl hydrazine, dialkyl hydrazine, urea, ethanolamine, monoalkyl ethanolamine, and dialkyl ethanolamine wherein alkyl is independently selected from methyl, ethyl, n-propyl or isopropyl wherein trialkylamines are excluded, sufficient to neutralize between about 40 to 85
15 percent of the fatty acid of subpart c;

wherein components a, b, and c are present in a:b:c ratios ranging from about 4:1:1 and 1:4:4; and preferably between about 4:1:1 and 3:1:1 by volume, wherein components a, b, c, and d when combined with mixing with the combustible fuel form a clear, stable microemulsion having a viscosity similar to that of the liquid combustible
20 fuel, and where the ratio of combustible fuel: additive ranges from about 80:20 to 99:1 by volume.

13. The additive composition of Claim 1 wherein:

a. one or more alcohols selected from the group consisting of water-soluble alcohols having between about 1 and 5 carbon atoms as defined herein in an anhydrous
25 state or as a 0.5-36% aqueous solution; and

b. one or more alcohols selected from the group consisting of saturated or unsaturated, straight- or branched-chain alcohols having from between about 6 and 18 carbon atoms; and

c. one or more ethoxylated alcohols selected from the group consisting of
30 alcohols having between 6 and 18 carbon atoms, where the ethylene oxide add-on is less than 5 moles; and

d. a fatty acid of the structure $R-(C=O)-OH$, wherein R is selected from alkyl, alkenyl or alkynyl having from about 10 to 24 carbon atoms; and

e. a source of nitrogen in an anhydrous state or as an aqueous solution selected from the group consisting of the ammonia, hydrazine, alkyl hydrazine, dialkyl hydrazine, urea, ethanolamine, monoalkyl ethanolamine, and dialkyl ethanolamine, wherein alkyl is independently selected from methyl, ethyl, n-propyl or isopropyl, wherein trialkylamines are excluded;

wherein components a, b, c, and d are present in a:b:c:d ratios ranging from about 6:1:1:1 and 1:4:4:4 by volume; wherein components a, b, c, d, and e when combined with mixing with the combustible fuel form a clear, stable microemulsion having a viscosity similar to that of the liquid combustible fuel, and where the ratio of combustible fuel: additive ranges from about 99:1 to 1:99 by volume.

14. The additive composition of Claim 1 wherein:

a. one or more alcohols selected from the group consisting of water-soluble alcohols having between about 1 and 5 carbon atoms as defined herein, in an anhydrous state or 5 to 10% aqueous ethanol denatured with methanol, iso-propanol, butanol or combinations thereof;

b. one or more alcohols selected from the group consisting of clear, liquid saturated or unsaturated, straight- or branched-chain alcohols having from between about 6 and 12 carbon atoms;

c. one or more alcohols selected from the group consisting of ethoxylated alcohols having between about 12 and 16 carbon atoms, where the ethylene oxide addition is less than 5 moles;

d. a fatty acid of the structure $R-(C=O)-OH$, wherein R is selected from alkyl, alkenyl or alkynyl having from about 10 to 24 carbon atom; and preferably oleic acid and linoleic acid;

e. a source of nitrogen in an anhydrous state or as an aqueous solution selected from the group consisting of the ammonia, hydrazine, alkyl hydrazine, dialkyl hydrazine, urea, ethanolamine, monoalkyl ethanolamine, and dialkyl ethanolamine wherein alkyl is independently selected from methyl, ethyl, n-propyl or isopropyl, wherein trialkylamines are excluded, sufficient to neutralize between about 40 to 85 percent of the fatty acid of subpart c;

wherein components a, b, c, and d are present in a:b:c:d ratios ranging from about 6:1:1:1 and 1:4:4:4 by volume, wherein components a, b, c, d, and e when combined with mixing with the combustible fuel form a clear, stable microemulsion

having a viscosity similar to that of the liquid combustible fuel, and where the ratio of combustible fuel:additive ranges from about 80:20 to 99:1 by volume.

15. The additive composition of Claim 1 wherein:

- a. one or more alcohols selected from the group consisting of water-soluble
5 alcohols having between about 1 and 5 carbon atoms as defined herein in an anhydrous state or as a 0.5-36% aqueous solution; and one or more of the following:
 - b. one or more alcohols selected from the group consisting of clear, liquid saturated or unsaturated, straight- or branched-chain alcohols having from between about 6 and 18 carbon atoms;
 - 10 c. one or more ethoxylated alcohols selected from the group consisting of alcohols having between 6 and 18 carbon atoms, where the ethylene oxide add-on is less than 5 moles;
 - d. a fatty acid of the structure $R-(C=O)-OH$, wherein R is selected from alkyl, alkenyl or alkynyl having from about 10 to 24 carbon atoms with
 - 15 e. a source of nitrogen in an anhydrous state or as an aqueous solution selected from the group consisting of the ammonia, hydrazine, alkyl hydrazine, dialkyl hydrazine, urea, ethanolamine, monoalkyl ethanolamine, and dialkyl ethanolamine wherein alkyl is independently selected from methyl, ethyl, n-propyl or isopropyl, wherein trialkylamines are excluded;
 - 20 wherein components a and one or more of b, c, d, and e, when combined with mixing with the combustible fuel form a clear, stable microemulsion having a viscosity similar to the liquid combustible fuel, and where the ratio of combustible fuel: additive ranges from about 95:5 to 99:1 by volume.

16. The additive composition of claim 1 wherein:

- a. one or more alcohols selected from the group consisting of water-soluble
25 alcohols having between about 1 and 5 carbon atoms as defined herein in an anhydrous state or as a 0.5-36% aqueous solution; and one or more of the following:
 - b. one or more alcohols selected from the group consisting of clear, liquid saturated or unsaturated, straight- or branched-chain alcohols having from between
30 about 6 and 18 carbon atoms, or between about 6 and 12 carbon atoms;
 - c. one or more ethoxylated alcohols selected from the group consisting of alcohols having between 6 and 18 carbon atoms, ethylene oxide add-on is less than 5 moles;

d. a fatty acid of the structure $R-(C=O)-OH$, wherein R is selected from alkyl, alkenyl or alkynyl having from about 10 to 24 carbon atoms, with

e. a source of nitrogen in an anhydrous state or as an aqueous solution selected from the group consisting of the ammonia, hydrazine, alkyl hydrazine, dialkyl
5 hydrazine, urea, ethanolamine, monoalkyl ethanolamine, and dialkyl ethanolamine wherein alkyl is independently selected from methyl, ethyl, n-propyl or isopropyl, wherein trialkylamines are excluded;

wherein components a and one or more of b, c, d, and e, when combined with mixing with the combustible fuel form a clear, stable microemulsion having a viscosity
10 similar to the liquid combustible fuel, and where the ratio of combustible fuel: additive ranges from about 90:10 to 99:1 by volume.

17. The additive composition of claim 1 wherein:

a. one or more alcohols selected from the group consisting of water-soluble alcohols having between about 1 and 5 carbon atoms as defined herein in an anhydrous
15 state or as a 0.5-36% aqueous solution, and one or more of the following:

b. one or more alcohols selected from the group consisting of clear, liquid saturated or unsaturated, straight- or branched-chain alcohols having from between about 6 and 18 carbon atoms;

c. one or more ethoxylated alcohols selected from the group consisting of
20 alcohols having between 6 and 18 carbon atoms, where the ethylene oxide add-on is less than 5 moles;

d. a fatty acid of the structure $R-(C=O)-OH$, wherein R is selected from alkyl, alkenyl or alkynyl having from about 10 to 24 carbon atoms, with

e. a source of nitrogen in an anhydrous state or as an aqueous solution
25 selected from the group consisting of the ammonia, hydrazine, alkyl hydrazine, dialkyl hydrazine, urea, ethanolamine, monoalkyl ethanolamine, and dialkyl ethanolamine wherein alkyl is independently selected from methyl, ethyl, n-propyl or isopropyl wherein trialkylamines are excluded;

wherein components a and one or more of b, c, d and e, when combined with
30 mixing with the combustible fuel form a clear, stable microemulsion having a viscosity similar to that of the liquid combustible fuel, and where the ratio of combustible fuel: additive ranges from about 80:20 to 99:1 by volume.

18. The additive composition of claim 1 wherein:

a. one or more alcohols selected from the group consisting of water-soluble alcohols having between about 1 and 5 carbon atoms as defined herein in an anhydrous state or as a 0.5-36% aqueous solution; and one or more of the following:

5 b. one or more alcohols selected from the group consisting of clear, liquid saturated or unsaturated, straight- or branched-chain alcohols having from between about 6 and 18 carbon atoms;

c. one or more ethoxylated alcohols selected from the group consisting of alcohols having between 6 and 18 carbon atoms, where the ethylene oxide add-on is less than 5 moles;

10 d. a fatty acid of the structure $R-(C=O)-OH$, wherein R is selected from alkyl, alkenyl or alkynyl having from about 10 to 24 carbon atoms with

e. a source of nitrogen in an anhydrous state or as an aqueous solution selected from the group consisting of the ammonia, hydrazine, alkyl hydrazine, dialkyl hydrazine, urea, ethanolamine, monoalkyl ethanolamine, and dialkyl ethanolamine
15 wherein alkyl is independently selected from methyl, ethyl, n-propyl or isopropyl wherein trialkylamines are excluded;

wherein components a and one or more of b, c, d and e, when combined with mixing with the combustible fuel form a clear, stable microemulsion having a viscosity similar to that of the liquid combustible fuel, and where the ratio of combustible fuel:
20 additive ranges from about 60:40 to 99:1 by volume.

19. The additive composition of Claim 1 wherein:

a. one or more alcohols selected from the group consisting of water-soluble alcohols having between about 1 and 5 carbon atoms as defined herein in an anhydrous state or as a 0.5-36% aqueous solution; and one or more of the following:

25 b. one or more alcohols selected from the group consisting of clear, liquid saturated or unsaturated, straight- or branched-chain alcohols having from between about 6 and 18 carbon atoms;

c. one or more ethoxylated alcohols selected from the group consisting of alcohols having between 6 and 18 carbon atoms, where the ethylene oxide add-on is less than 5 moles;

30 d. a fatty acid of the structure $R-(C=O)-OH$, wherein R is selected from alkyl, alkenyl or alkynyl having from about 10 to 24 carbon atoms, with

e. a source of nitrogen in an anhydrous state or as an aqueous solution

selected from the group consisting of the ammonia, hydrazine, alkyl hydrazine, dialkyl hydrazine, urea, ethanolamine, monoalkyl ethanolamine, and dialkyl ethanolamine wherein alkyl is independently selected from methyl, ethyl, n-propyl or isopropyl, wherein trialkylamines are excluded;

- 5 wherein components a and one or more of b, c, d, and e, when combined with mixing with the combustible fuel form a clear, stable microemulsion having a viscosity similar to the liquid combustible fuel, and where the ratio of combustible fuel: additive ranges from about 50:50 to 99:1 by volume.

20. The additive composition of Claim 1 wherein:

- 10 a. one or more alcohols selected from the group consisting of water-soluble alcohols having between about 1 and 5 carbon atoms as defined herein in an anhydrous state or as a 0.5-36% aqueous solution; and one or more of the following:

- b. one or more alcohols selected from the group consisting of clear, liquid saturated or unsaturated, straight- or branched-chain alcohols having from between
15 about 6 and 18 carbon atoms;

- c. one or more ethoxylated alcohols selected from the group consisting of alcohols having between 6 and 18 carbon atoms, where the ethylene oxide add-on is less than 5 moles;

- d. a fatty acid of the structure $R-(C=O)-OH$, wherein R is selected from
20 alkyl, alkenyl or alkynyl having from about 10 to 24 carbon atoms, with

- e. a source of nitrogen in an anhydrous state or as an aqueous solution selected from the group consisting of the ammonia, hydrazine, alkyl hydrazine, dialkyl hydrazine, urea, ethanolamine, monoalkyl ethanolamine, and dialkyl ethanolamine wherein alkyl is independently selected from methyl, ethyl, n-propyl or isopropyl
25 wherein trialkylamines are excluded;

 wherein components a and one or more of b, c, d and e, when combined with mixing with the combustible fuel form a clear, stable microemulsion having a viscosity similar to the liquid combustible fuel, and where the ratio of combustible fuel: additive ranges from about 1:99 to 50:50 by volume.

- 30 21. The additive composition of claim 1 wherein:

- a. one or more alcohols selected from the group consisting of water-soluble alcohols having between about 1 and 5 carbon atoms as defined herein in an anhydrous state or as a 0.5-36% aqueous solution; and one or more of the following:

b. one or more alcohols selected from the group consisting of clear, liquid saturated or unsaturated, straight- or branched-chain alcohols having from between about 6 and 18 carbon atoms;

c. one or more ethoxylated alcohols selected from the group consisting of
5 alcohols having between 6 and 18 carbon atoms, where the ethylene oxide add-on is less than 5 moles;

d. a fatty acid of the structure $R-(C=O)-OH$, wherein R is selected from alkyl, alkenyl or alkynyl having from about 10 to 24 carbon atoms, with

e. a source of nitrogen in an anhydrous state or as an aqueous solution
10 selected from the group consisting of the ammonia, hydrazine, alkyl hydrazine, dialkyl hydrazine, urea, ethanolamine, monoalkyl ethanolamine, and dialkyl ethanolamine wherein alkyl is independently selected from methyl, ethyl, n-propyl or isopropyl wherein trialkylamines are excluded;

wherein the combustible fuel is any conventional or synthetic combustible fuel.

15 22. The additive composition of claim 1, wherein:

a. one or more alcohols selected from the group consisting of water-soluble alcohols having between about 1 and 5 carbon atoms as defined herein in an anhydrous state or as a 0.5-36% aqueous solution; and one or more of the following:

b. one or more alcohols selected from the group consisting of clear, liquid
20 saturated or unsaturated, straight- or branched-chain alcohols having from between about 6 and 18 carbon atoms;

c. one or more ethoxylated alcohols selected from the group consisting of alcohols having between 6 and 18 carbon atoms, where the ethylene oxide add-on is less than 5 moles;

25 d. a fatty acid of the structure $R-(C=O)-OH$, wherein R is selected from alkyl, alkenyl or alkynyl having from about 10 to 24 carbon atoms, with

e. a source of nitrogen in an anhydrous state or as an aqueous solution
selected from the group consisting of the ammonia, hydrazine, alkyl hydrazine, dialkyl hydrazine, urea, ethanolamine, monoalkyl ethanolamine, and dialkyl ethanolamine
30 wherein alkyl is independently selected from methyl, ethyl, n-propyl or isopropyl, wherein trialkylamines are excluded;

wherein the combustible fuel is a fossil fuel such oil, jet fuel, kerosene, other distillate fuels, coal as Diesel fuel, heating slurry, gasoline or combinations thereof.

selected from the group consisting of the ammonia, hydrazine, alkyl hydrazine, dialkyl hydrazine, urea, ethanolamine, monoalkyl ethanolamine, and dialkyl ethanolamine wherein alkyl is independently selected from methyl, ethyl, n-propyl or isopropyl, wherein trialkylamines are excluded;

- 5 wherein the combustible fuel is other alcohols, such as long-chain saturated fatty alcohols which are solid at room (ambient) temperature, having between about 12 and 18 carbon atoms.

25. An additive composition for a combustible fuel, which may also be used itself as a fuel composition, to utilize readily available and renewable resources
10 and produce improved fuel performance and combustion, which fuel comprises a composition of components:

- a. one or more alcohols selected from the group consisting of water-soluble alcohols having between about 1 and 5 carbon atoms as defined herein in an anhydrous state or as a 0.5-36% aqueous solution; and one or more of the following:
- 15 b. one or more alcohols selected from the group consisting of clear, liquid saturated or unsaturated, straight- or branched-chain alcohols having from between about 6 and 18 carbon atoms;
- c. one or more ethoxylated alcohols selected from the group consisting of alcohols having between 6 and 18 carbon atoms, where the ethylene oxide add-on is
20 less than 5 moles;
- d. a fatty acid of the structure $R-(C=O)-OH$, wherein R is selected from alkyl, alkenyl or alkynyl having from about 10 to 24 carbon atoms, with
- e. a source of nitrogen in an anhydrous state or as an aqueous solution selected from the group consisting of the ammonia, hydrazine, alkyl hydrazine, dialkyl
25 hydrazine, urea, ethanolamine, monoalkyl ethanolamine, and dialkyl ethanolamine wherein alkyl is independently selected from methyl ethyl n-propyl or isopropyl, wherein trialkylamines are excluded;

wherein the above composition comprises the total combustible fuel and the ratio of the other combustible fuels: above composition is 0:100.

30

26. An additive composition for a combustible fuel to produce improved combustion and reduced smoke and particulate production of the fuel, which additive comprises a composition of components:


a. a fatty acid of the structure $R-(C=O)-OH$, wherein R is selected from alkyl, alkenyl or alkynyl having from about 10 to 24 carbon atoms is present in between about 15 and 60 parts by volume;

b. at least one alcohol selected from the group consisting of methanol, ethanol, propanol, butanol, pentanol and clear liquid alcohols having from between about 6 and 12 carbon atoms, is present in between about 18 and 75 parts by volume, where methanol is combined with at least one other alcohol;

c. water which is present in between about 2 and 32 parts by volume; and

d. urea sufficient to neutralize between about 40 to 70 percent of the fatty acid of subpart a;

wherein the additive composition optionally excludes ethylene glycol, glycerine, polyethylene, polypropylene, aromatic organic compounds, sulfur, sulfur compounds, metals, metal compounds, compounds of phenanthrene, and emulsifiers of the general formula:

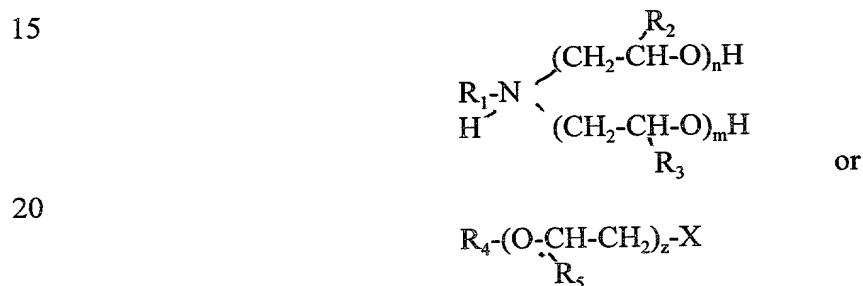

wherein R_1 and R_4 each independently is a saturated or unsaturated, straight-chain or branched hydrocarbon aliphatic radical each of 4 to 24 C atoms (e.g., alkyl or alkenyl) or R_4 is alkylphenyl of 1 to 18 C atoms in the optionally branched alkyl chain or H; R_2 , R_3 and R_5 each independently represent a methyl group of H, n plus m is a number from 1 to 20; z is a number from 0 to 15; and X is $-\text{COO}(-)$ or $-\text{OCH}_2\text{COO}(-)$, wherein, substituents R_2 , R_3 and R_5 the same or different in different monomer units of each chain, and optionally other organic diacids are excluded.

Preferably the fuel/additive is in a ratio to produce a water-in-oil (w/o) emulsion, i.e., between about 50:50 to 95:5, more preferably between about 65:35 to 90:10, and most preferably about 80:20 to 85:15.

27. An additive composition for a combustible fuel to produce improved combustion and reduced smoke and particulate production of the fuel, which additive

comprises a composition of components:


a. a fatty acid of the structure $R-(C=O)-OH$, wherein R is selected from alkyl, alkenyl or alkynyl having from about 10 to 24 carbon atoms is present in between about 15 and 60 parts by volume;

5 b. ethanol is present in between about 18 and 75 parts;

c. water which is present in between about 2 and 32 parts by volume; and

d. urea and/or ammonia sufficient to neutralize between about 40 to 70 percent of the fatty acid of subpart a;

wherein the additive composition optionally excludes ethylene glycol, glycerine,
10 polyethylene, polyoxyethylene, polyoxypropylenes, aromatic organic compounds, sulfur, sulfur compounds, metals, metal compounds, compounds of phenanthrene, and emulsifiers of the general formula:

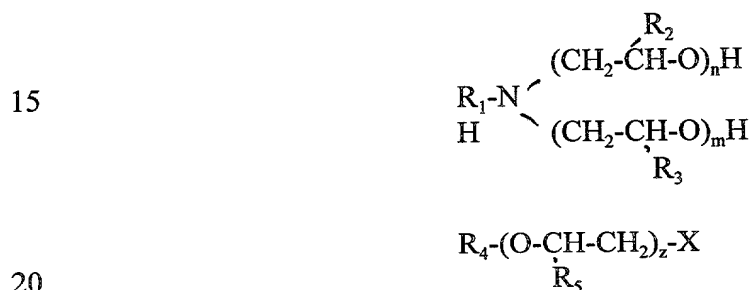

wherein R_1 and R_4 each independently is a saturated or unsaturated, straight-chain or branched hydrocarbon aliphatic radical each of 4 to 24 C atoms (e.g., alkyl or alkenyl) or R_4 is also can be alkylphenyl of 1 to 18 C atoms in the optionally branched
25 alkyl chain or H; R_2 , R_3 and R_5 each independently represent a methyl group or H, n plus m is to be a number from 1 to 20; z can be a number from 0 to 15; and X is -
COO(-) or -OCH₂COO(-), wherein, substituents R_2 , R_3 and R_5 are the same or different
in different monomer units of each chain, and optionally other organic diacids are
30 excluded, wherein the fuel/additive is a ratio to produce a water-in-oil (w/o) emulsion,
between about 65:35 to 90:10 by volume.

- | Year | 1997 | 1998 | 1999 | 2000 | 2001 | 2002 | 2003 | 2004 | 2005 | 2006 | 2007 | 2008 | 2009 | 2010 | 2011 | 2012 | 2013 | 2014 | 2015 | 2016 | 2017 | 2018 | 2019 | 2020 | 2021 | 2022 | 2023 | 2024 | 2025 | 2026 | 2027 | 2028 | 2029 | 2030 | 2031 | 2032 | 2033 | 2034 | 2035 | 2036 | 2037 | 2038 | 2039 | 2040 | 2041 | 2042 | 2043 | 2044 | 2045 | 2046 | 2047 | 2048 | 2049 | 2050 | 2051 | 2052 | 2053 | 2054 | 2055 | 2056 | 2057 | 2058 | 2059 | 2060 | 2061 | 2062 | 2063 | 2064 | 2065 | 2066 | 2067 | 2068 | 2069 | 2070 | 2071 | 2072 | 2073 | 2074 | 2075 | 2076 | 2077 | 2078 | 2079 | 2080 | 2081 | 2082 | 2083 | 2084 | 2085 | 2086 | 2087 | 2088 | 2089 | 2090 | 2091 | 2092 | 2093 | 2094 | 2095 | 2096 | 2097 | 2098 | 2099 | 2100 |
|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 1997 | 1998 | 1999 | 2000 | 2001 | 2002 | 2003 | 2004 | 2005 | 2006 | 2007 | 2008 | 2009 | 2010 | 2011 | 2012 | 2013 | 2014 | 2015 | 2016 | 2017 | 2018 | 2019 | 2020 | 2021 | 2022 | 2023 | 2024 | 2025 | 2026 | 2027 | 2028 | 2029 | 2030 | 2031 | 2032 | 2033 | 2034 | 2035 | 2036 | 2037 | 2038 | 2039 | 2040 | 2041 | 2042 | 2043 | 2044 | 2045 | 2046 | 2047 | 2048 | 2049 | 2050 | 2051 | 2052 | 2053 | 2054 | 2055 | 2056 | 2057 | 2058 | 2059 | 2060 | 2061 | 2062 | 2063 | 2064 | 2065 | 2066 | 2067 | 2068 | 2069 | 2070 | 2071 | 2072 | 2073 | 2074 | 2075 | 2076 | 2077 | 2078 | 2079 | 2080 | 2081 | 2082 | 2083 | 2084 | 2085 | 2086 | 2087 | 2088 | 2089 | 2090 | 2091 | 2092 | 2093 | 2094 | 2095 | 2096 | 2097 | 2098 | 2099 | 2100 | |

COMPOSITION AS AN ADDITIVE TO
CREATE A CLEAR STABLE MICROEMULSION
WITH A COMBUSTIBLE LIQUID FUEL
TO IMPROVE COMBUSTION

5

ABSTRACT OF THE DISCLOSURE

The present invention relates to an additive composition for a combustible fuel to utilize readily available and renewable resources and to produce improved combustion and reduced smoke and particulate production of the combusted fuel, which additive composition comprises:

a. one or more water-soluble alcohols selected from the group consisting of alcohols having from between about 1 and 6 carbon atoms, in an anhydrous state or as a 0.5-36% aqueous solution, and one or more of the following:

b. one or more alcohols selected from the group consisting of clear, liquid saturated or unsaturated, straight- or branched-chain alcohols having from between about 6 and 18 carbon atoms;

c. one or more alcohols selected from the group consisting of ethoxylated straight- or branched- long-chain alcohols having between about 12 and 18 carbon atoms, where the ethylene oxide add-on is less than 5 moles;

d. a fatty acid of the structure $R-(C=O)-OH$, wherein R is selected from alkyl, alkenyl or alkynyl having from about 10 to 24 carbon atoms, with

e. a source of nitrogen in an anhydrous state or as an aqueous solution selected from the group consisting of the ammonia, hydrazine, alkyl hydrazine, dialkyl hydrazine, urea, ethanolamine,, monoalkyl ethanolamine, dialkyl ethanolamine wherein alkyl is independently selected from methyl, ethyl, n-propyl or isopropyl wherein trialkylamines are excluded;

wherein components a to e when combined with mixing with said combustible fuel form a clear stable microemulsion having a viscosity similar to a liquid fossil fuel; and

wherein said additive composition excludes glycerine, polyethylene, polyoxyethylene, polyoxypropylenes, aromatic organic compounds, sulfur, sulfur compounds, metals, metal compounds, compounds of phenanthrene. Specifically, compositions of ethanol, methanol, iso-propanol, octanol, 2-ethyl-hexanol, linoleic

acid, oleic acid, ammonia, and water are preferred to produce minimum smoke, particulates, and noxious gases upon combustion.

5

10

15

20

2025 RELEASE UNDER E.O. 14176

Fig. _1

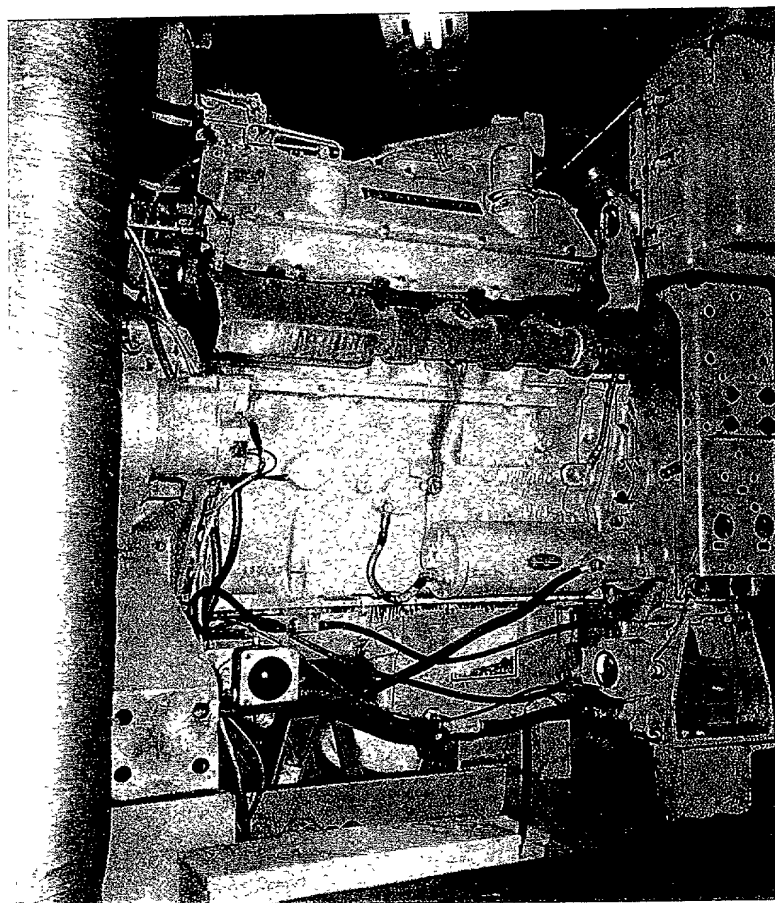


Fig. _2



Fig. _3

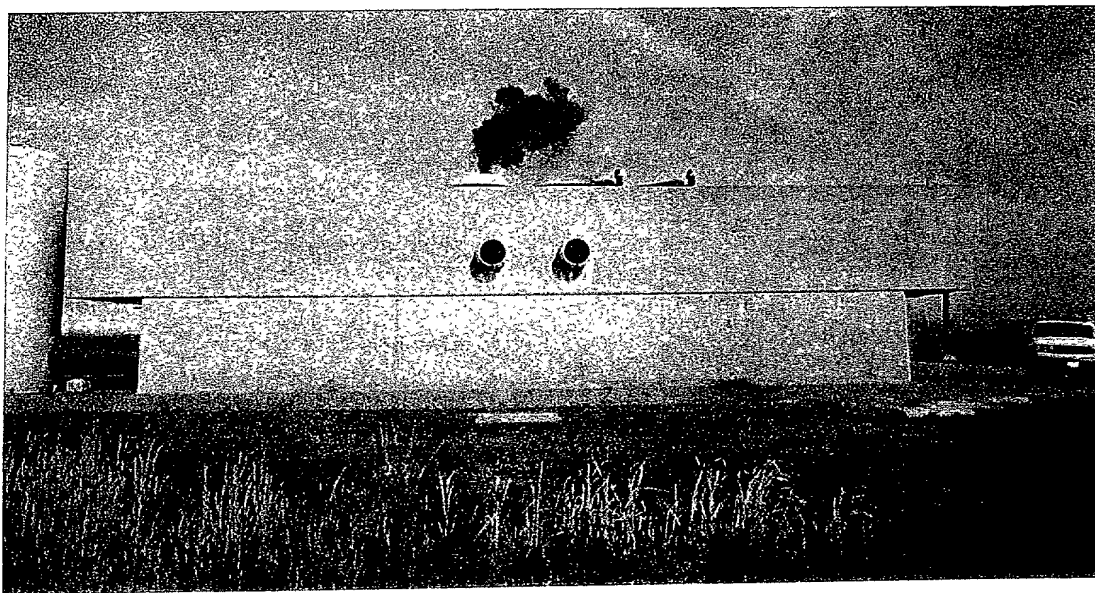


Fig. _4



0923221 0449
061110 12002200

Fig. _5

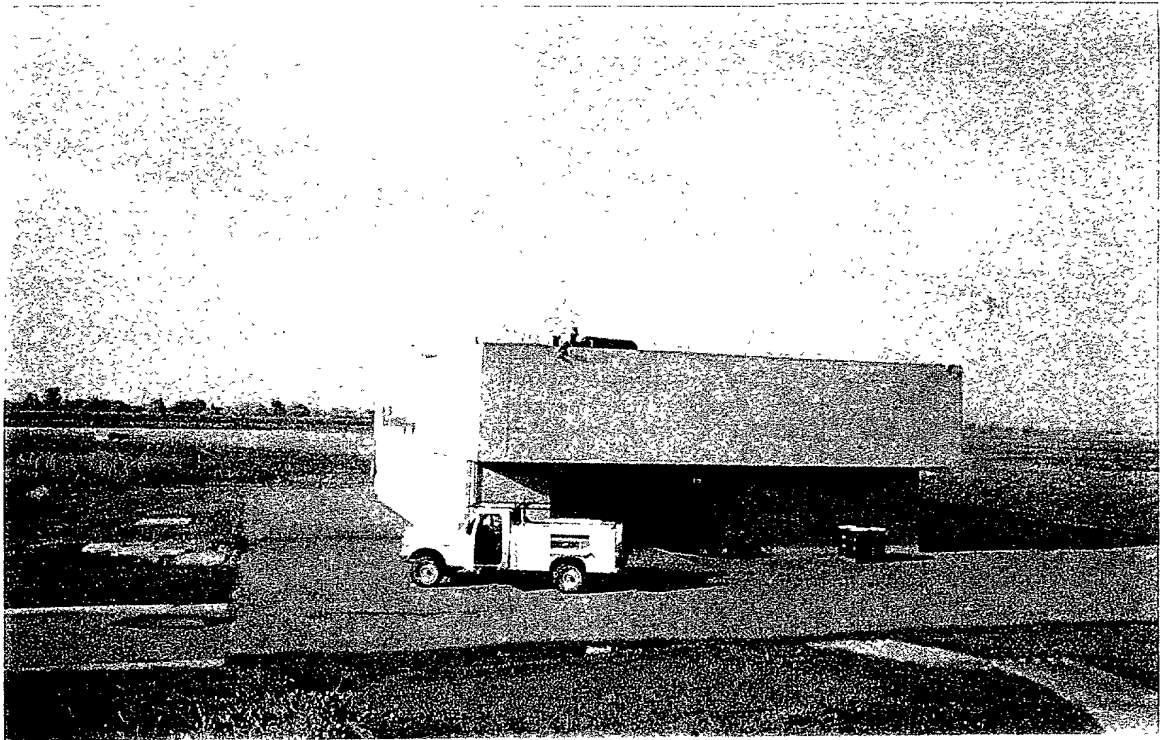


Fig. _6

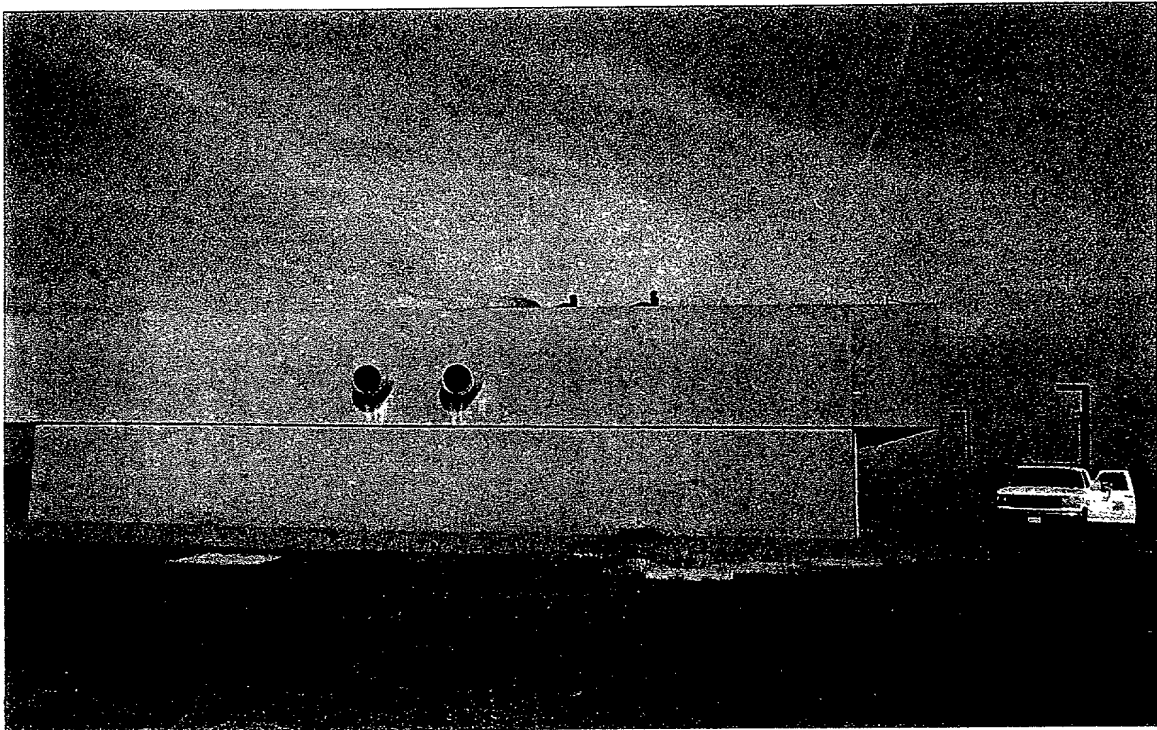



Fig. _7



Fig. _8



Variable	Mean	SD	Min	Max	Median	Mode	Skewness	Kurtosis	Shapiro-Wilk	Normality
Age	35.2	12.5	18	65	32	30	0.15	2.10	0.98	Normal
Gender	1.2	0.4	1	2	1	1	0.05	0.10	0.99	Normal
Marital Status	2.1	0.8	1	3	2	2	0.10	0.50	0.97	Normal
Education	15.8	2.5	10	20	16	16	0.05	0.10	0.99	Normal
Income	1200	300	500	2000	1100	1000	0.10	0.50	0.97	Normal
Occupation	1.5	0.5	1	3	1	1	0.05	0.10	0.99	Normal
Health Status	2.5	0.5	1	3	2	2	0.05	0.10	0.99	Normal
Stress Level	3.2	1.0	1	5	3	3	0.10	0.50	0.97	Normal
Life Satisfaction	4.5	0.8	3	5	4	4	0.05	0.10	0.99	Normal
Resilience	3.8	0.9	2	5	3	3	0.10	0.50	0.97	Normal
Optimism	4.2	0.7	3	5	4	4	0.05	0.10	0.99	Normal
Emotional Stability	3.5	0.6	2	4	3	3	0.05	0.10	0.99	Normal
Self-Esteem	4.0	0.8	3	5	4	4	0.05	0.10	0.99	Normal
Life Satisfaction	4.5	0.8	3	5	4	4	0.05	0.10	0.99	Normal
Resilience	3.8	0.9	2	5	3	3	0.10	0.50	0.97	Normal
Optimism	4.2	0.7	3	5	4	4	0.05	0.10	0.99	Normal
Emotional Stability	3.5	0.6	2	4	3	3	0.05	0.10	0.99	Normal
Self-Esteem	4.0	0.8	3	5	4	4	0.05	0.10	0.99	Normal

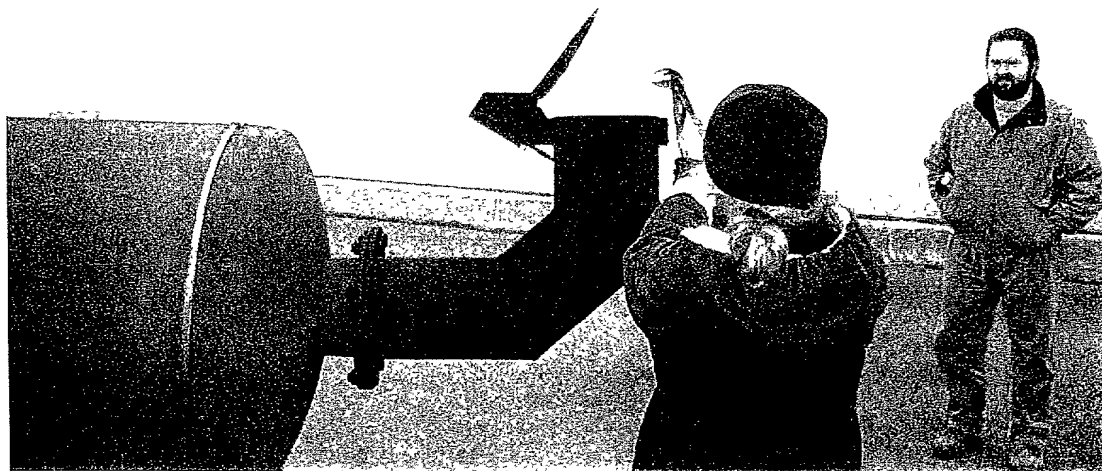

Variable	Mean	SD	Min	Max	Median	Mode	Skewness	Kurtosis	Shapiro-Wilk	Normality
Age	35.2	12.5	18	65	32	30	0.15	2.10	0.98	Normal
Gender	1.2	0.4	1	2	1	1	0.05	0.10	0.99	Normal
Marital Status	2.1	0.8	1	3	2	2	0.10	0.50	0.97	Normal
Education	15.8	2.5	10	20	16	16	0.05	0.10	0.99	Normal
Income	1200	300	500	2000	1100	1000	0.10	0.50	0.97	Normal
Occupation	1.5	0.5	1	3	1	1	0.05	0.10	0.99	Normal
Health Status	2.5	0.5	1	3	2	2	0.05	0.10	0.99	Normal
Stress Level	3.2	1.0	1	5	3	3	0.10	0.50	0.97	Normal
Life Satisfaction	4.5	0.8	3	5	4	4	0.05	0.10	0.99	Normal
Resilience	3.8	0.9	2	5	3	3	0.10	0.50	0.97	Normal
Optimism	4.2	0.7	3	5	4	4	0.05	0.10	0.99	Normal
Emotional Stability	3.5	0.6	2	4	3	3	0.05	0.10	0.99	Normal
Self-Esteem	4.0	0.8	3	5	4	4	0.05	0.10	0.99	Normal
Life Satisfaction	4.5	0.8	3	5	4	4	0.05	0.10	0.99	Normal
Resilience	3.8	0.9	2	5	3	3	0.10	0.50	0.97	Normal
Optimism	4.2	0.7	3	5	4	4	0.05	0.10	0.99	Normal
Emotional Stability	3.5	0.6	2	4	3	3	0.05	0.10	0.99	Normal
Self-Esteem	4.0	0.8	3	5	4	4	0.05	0.10	0.99	Normal

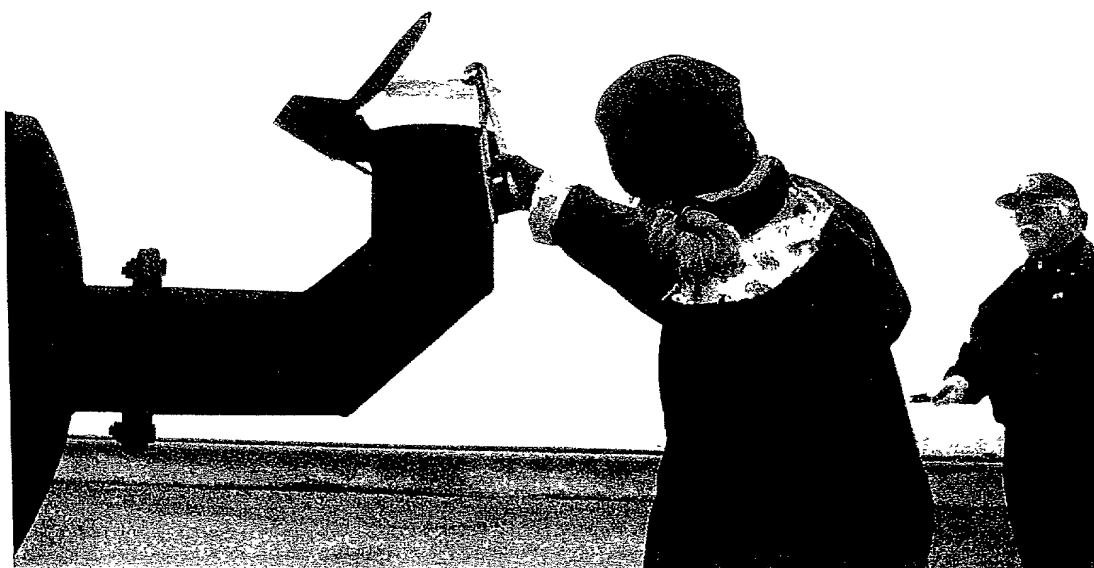


Fig. _11

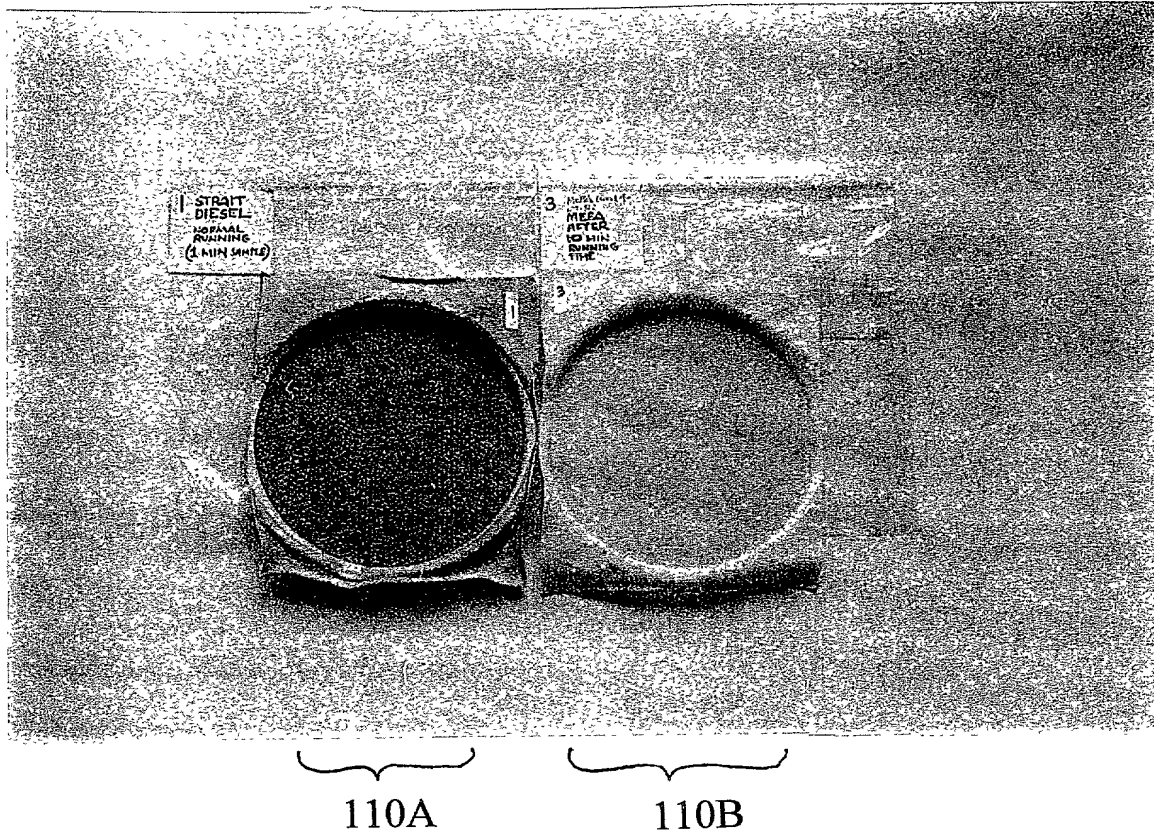


Fig. _12

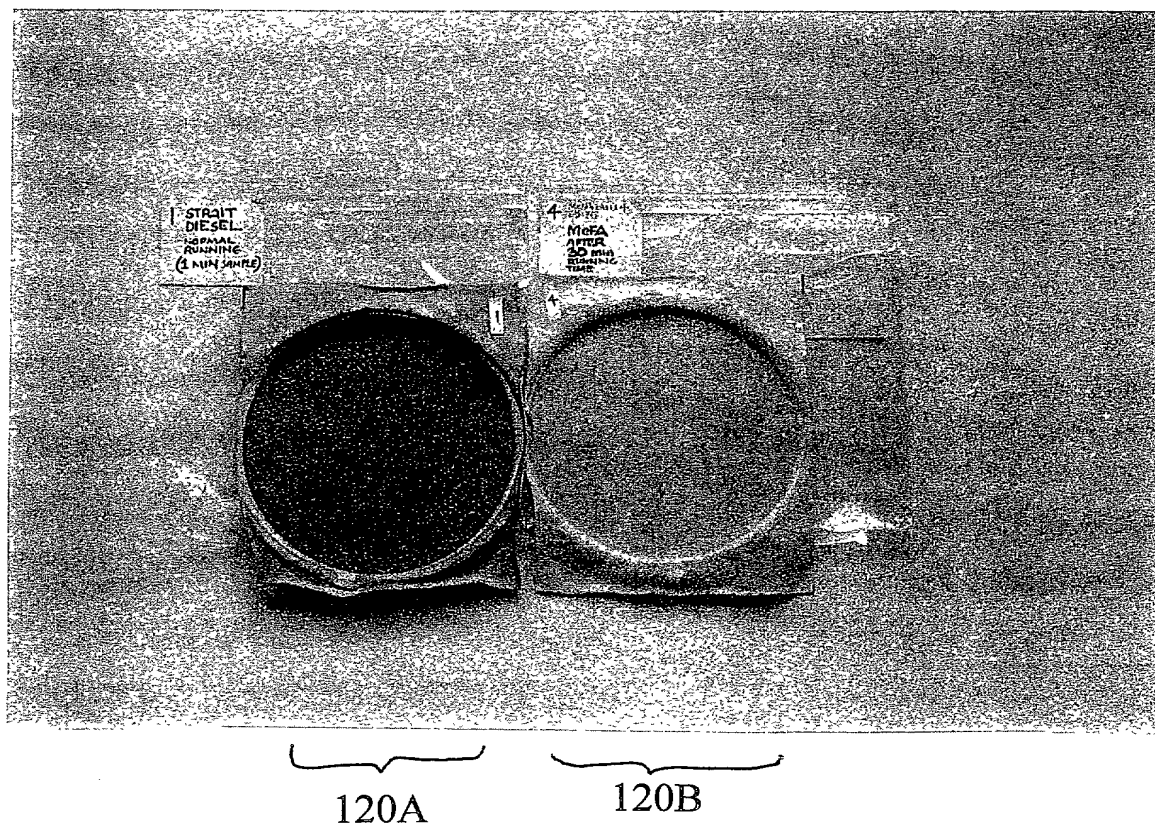


Fig. _13

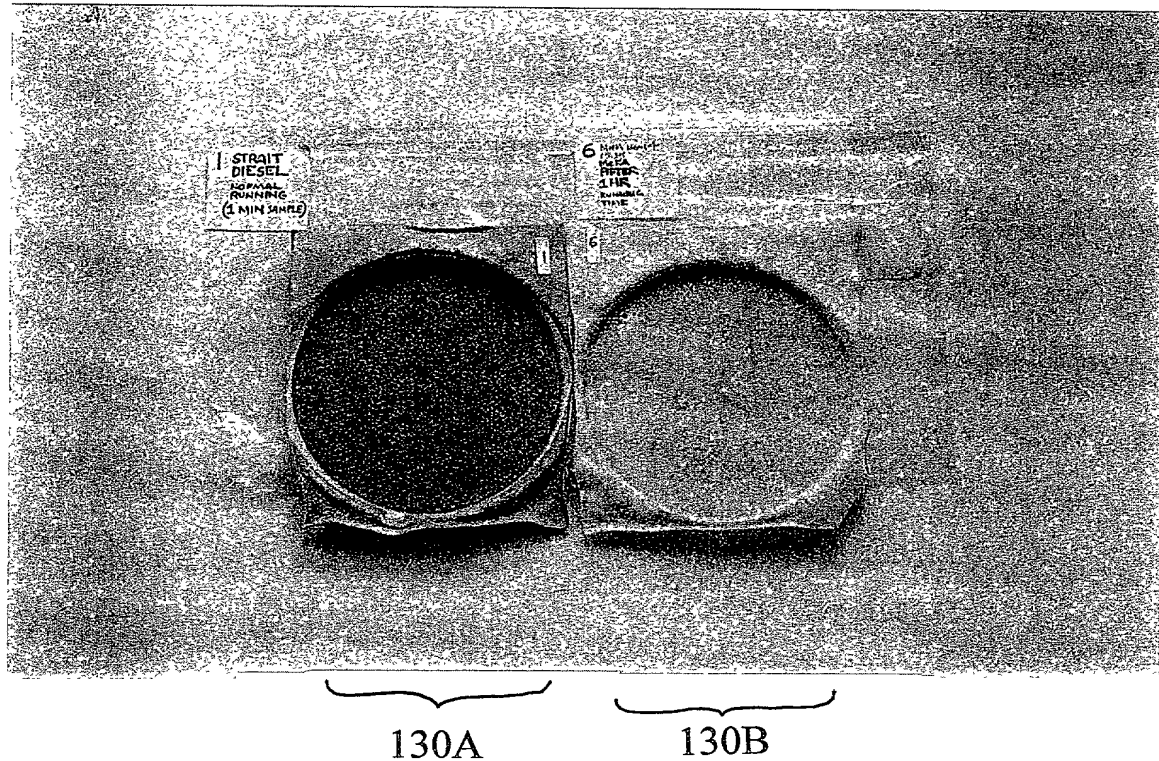


Fig. _14

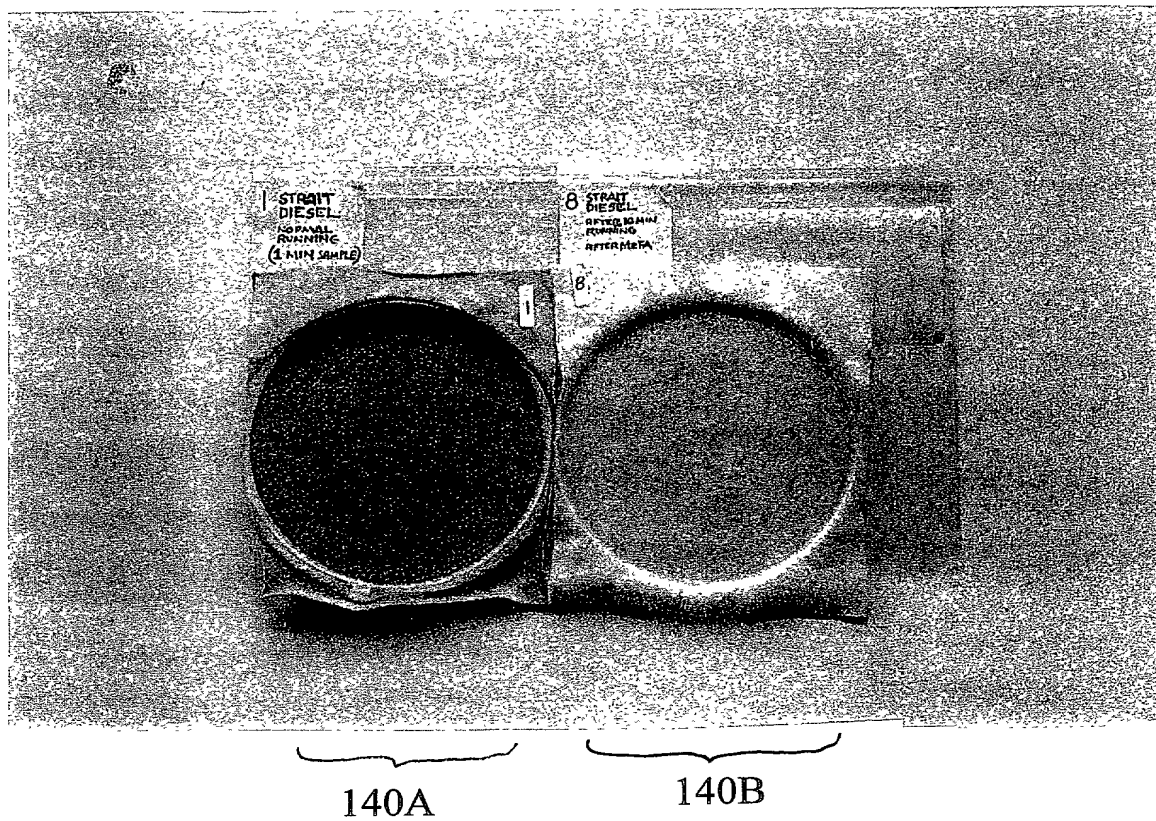


Fig. _15

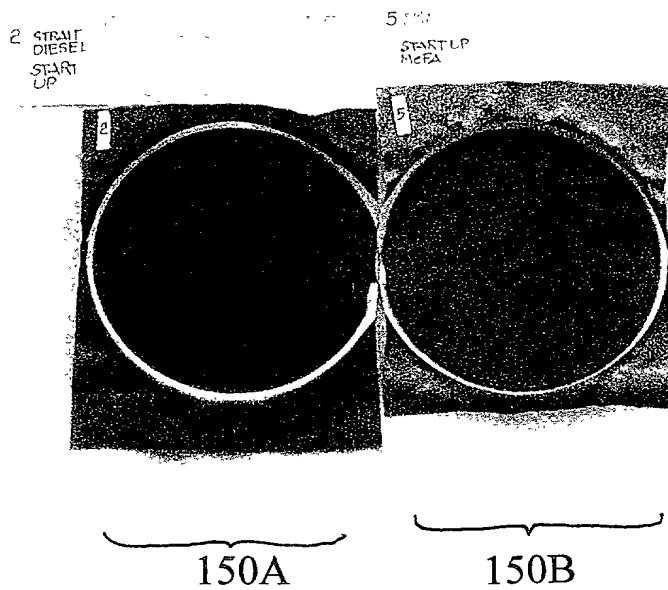


Fig. _16


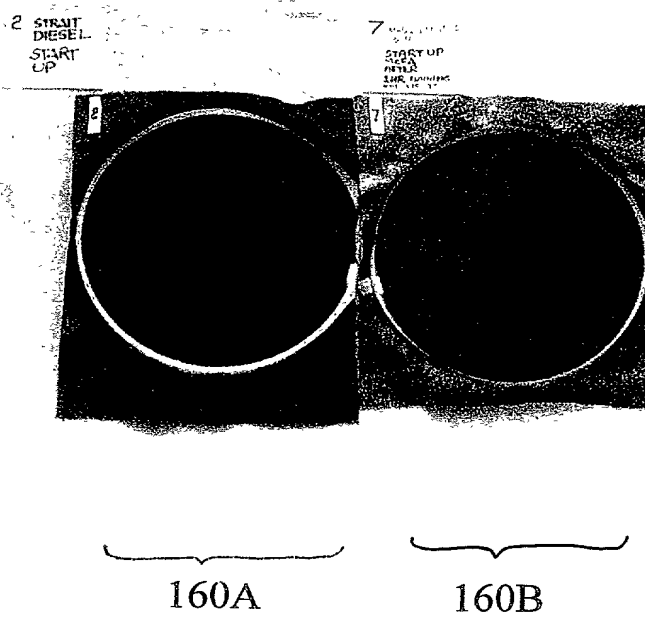


Fig. _17

2 STRAIT DIESEL START UP
9 STRAIGHT DIESEL START UP (after 1000 RPM)

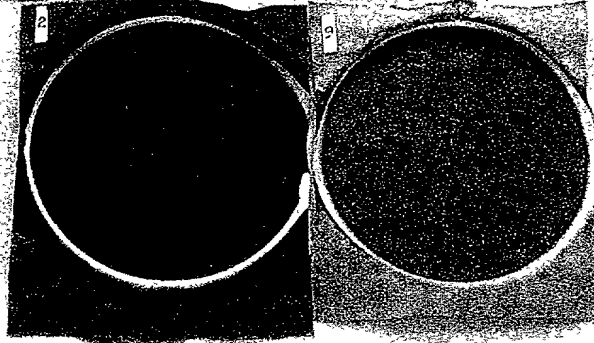

170A

170B


Fig. _18

150B

160B

170B

150A
160A
170A

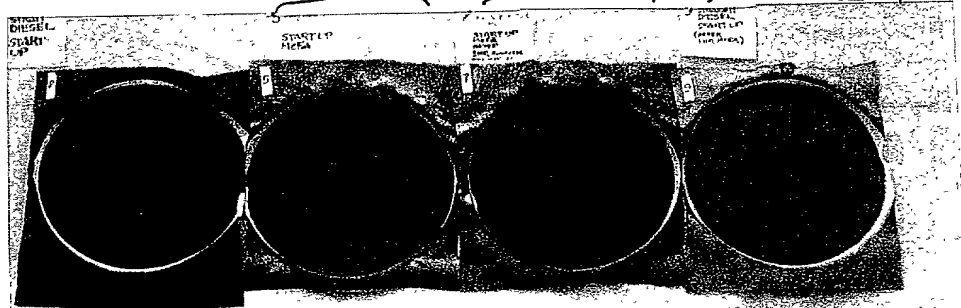

110A
120A
140A




110B

120B

140B

	Mean	SD	Median	Mode	Range	Skewness	Kurtosis	Shapiro-Wilk	Normality
Age	35.5	10.5	35	35	25-55	0.1	0.2	0.95	Normal
Gender	1.5	1.0	1	1	1-2	0.5	0.2	0.95	Normal
Marital Status	1.5	1.0	1	1	1-2	0.5	0.2	0.95	Normal
Education	12.5	2.5	12	12	10-15	0.1	0.2	0.95	Normal
Income	1500	500	1200	1200	800-2000	0.1	0.2	0.95	Normal
Occupation	1.5	1.0	1	1	1-2	0.5	0.2	0.95	Normal
Health Status	1.5	1.0	1	1	1-2	0.5	0.2	0.95	Normal
Stress Level	3.5	1.5	3	3	2-5	0.1	0.2	0.95	Normal
Life Satisfaction	4.5	1.5	4	4	3-5	0.1	0.2	0.95	Normal
Resilience	3.5	1.5	3	3	2-5	0.1	0.2	0.95	Normal
Emotional Stability	3.5	1.5	3	3	2-5	0.1	0.2	0.95	Normal
Self-Esteem	3.5	1.5	3	3	2-5	0.1	0.2	0.95	Normal
Optimism	3.5	1.5	3	3	2-5	0.1	0.2	0.95	Normal
Gratitude	3.5	1.5	3	3	2-5	0.1	0.2	0.95	Normal
Forgiveness	3.5	1.5	3	3	2-5	0.1	0.2	0.95	Normal
Empathy	3.5	1.5	3	3	2-5	0.1	0.2	0.95	Normal
Compassion	3.5	1.5	3	3	2-5	0.1	0.2	0.95	Normal
Kindness	3.5	1.5	3	3	2-5	0.1	0.2	0.95	Normal
Generosity	3.5	1.5	3	3	2-5	0.1	0.2	0.95	Normal
Patience	3.5	1.5	3	3	2-5	0.1	0.2	0.95	Normal
Perseverance	3.5	1.5	3	3	2-5	0.1	0.2	0.95	Normal
Determination	3.5	1.5	3	3	2-5	0.1	0.2	0.95	Normal
Resilience	3.5	1.5	3	3	2-5	0.1	0.2	0.95	Normal
Adaptability	3.5	1.5	3	3	2-5	0.1	0.2	0.95	Normal
Flexibility	3.5	1.5	3	3	2-5	0.1	0.2	0.95	Normal
Openness	3.5	1.5	3	3	2-5	0.1	0.2	0.95	Normal
Conscientiousness	3.5	1.5	3	3	2-5	0.1	0.2	0.95	Normal
Agreeableness	3.5	1.5	3	3	2-5	0.1	0.2	0.95	Normal
Neuroticism	3.5	1.5	3	3	2-5	0.1	0.2	0.95	Normal
Extraversion	3.5	1.5	3	3	2-5	0.1	0.2	0.95	Normal
Introversion	3.5	1.5	3	3	2-5	0.1	0.2	0.95	Normal
Sensitivity	3.5	1.5	3	3	2-5	0.1	0.2	0.95	Normal
Emotionality	3.5	1.5	3	3	2-5	0.1	0.2	0.95	Normal
Stability	3.5	1.5	3	3	2-5	0.1	0.2	0.95	Normal
Control	3.5	1.5	3	3	2-5	0.1	0.2	0.95	Normal
Regulation	3.5	1.5	3	3	2-5	0.1	0.2	0.95	Normal
Management	3.5	1.5	3	3	2-5	0.1	0.2	0.95	Normal
Handling	3.5	1.5	3	3	2-5	0.1	0.2	0.95	Normal
Dealing	3.5	1.5	3	3	2-5	0.1	0.2	0.95	Normal
Coping	3.5	1.5	3	3	2-5	0.1	0.2	0.95	Normal
Response	3.5	1.5	3	3	2-5	0.1	0.2	0.95	Normal
Reaction	3.5	1.5	3	3	2-5	0.1	0.2	0.95	Normal
Behavior	3.5	1.5	3	3	2-5	0.1	0.2	0.95	Normal
Conduct	3.5	1.5	3	3	2-5	0.1	0.2	0.95	Normal
Performance	3.5	1.5	3	3	2-5	0.1	0.2	0.95	Normal
Productivity	3.5	1.5	3	3	2-5	0.1	0.2	0.95	Normal
Efficiency	3.5	1.5	3	3	2-5	0.1	0.2	0.95	Normal
Effectiveness	3.5	1.5	3	3	2-5	0.1	0.2	0.95	Normal
Success	3.5	1.5	3	3	2-5	0.1	0.2	0.95	Normal
Achievement	3.5	1.5	3	3	2-5	0.1	0.2		



COMBINED DECLARATION AND POWER OF ATTORNEY

**UTILITY, DESIGN, NATIONAL STAGE OF PCT, SUPPLEMENTAL, DIVISIONAL,
CONTINUATION OR CIP APPLICATION)**

As a below named inventor, I hereby declare that:

TYPE OF DECLARATION

This declaration is of the following type:

- ☒ utility.
- ☐ design.
- ☐ supplemental.

- ☐ national stage of PCT.

- ☐ divisional.
- ☐ continuation.
- ☐ continuation-in-part (CIP).

INVENTORSHIP IDENTIFICATION

My residence, post office address and citizenship are as stated below next to my name, I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

TITLE OF INVENTION

**COMPOSITION AS AN ADDITIVE TO CREATE CLEAR STABLE SOLUTIONS AND
MICROEMULSIONS WITH A COMBUSTIBLE LIQUID FUEL TO IMPROVE COMBUSTION**

SPECIFICATION IDENTIFICATION

the specification of which:

(complete (a), (b) or (c))

- (a) ☒ Is attached hereto.

NOTICE OF _____ (1177 O.G. 60).

- (b) ☐ was filed on _____, as ☐ Serial No. 0 / _____ or ☐ _____ and was amended on _____ (if applicable).

- (c) ☐ was described and claimed in PCT International Application No. _____, filed on _____ and as amended under PCT Article 19 on _____ (if any).

ACKNOWLEDGMENT OF REVIEW OF PAPERS AND DUTY OF CANDOR

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information, which is material to patentability as defined in 37, Code of Federal Regulations, §1.56,

(also check the following items, if desired)

- ☐ and which is material to the examination of this application, namely, information where there is a substantial likelihood that a reasonable Examiner would consider it important in deciding whether to allow the application to issue as a patent, and
- ☐ in compliance with this duty, there is attached an information disclosure statement, in accordance with 37 CFR 1.98.

PRIORITY CLAIM (35 U.S.C. § 119(a)-(d))

I hereby claim foreign priority benefits under Title 35, United States Code, § 119(a)-(d) of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed.

(complete (d) or (e))

- (d) ☒ no such applications have been filed.
- (e) ☐ such applications have been filed as follows

**PRIOR FOREIGN/PCT APPLICATION(S), FILED WITHIN 12 MONTHS
(6 MONTHS FOR DESIGN) PRIOR TO THIS APPLICATION
AND ANY PRIORITY CLAIMS UNDER 35 U.S.C. § 119(a)-(d)**

Country (or indicate if PCT)	Application Number	Date of Filing (day, month, year)	Priority Claimed Under 37 USC 119
N/A			<input type="checkbox"/> YES NO <input type="checkbox"/>

**CLAIM FOR BENEFIT OF PRIOR U.S. PROVISIONAL APPLICATION(S)
(34 U.S.C. § 119(e))**

I hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below:

PROVISIONAL APPLICATION NUMBER	FILING DATE
<u>60 / 071,181</u>	<u>January 12, 1998</u>
<u>60 / 079,686</u>	<u>March 27, 1998</u>
<u>60 / 093,305</u>	<u>July 17, 1998</u>

**CLAIM FOR BENEFIT OF PRIOR U.S. PROVISIONAL APPLICATION(S)
UNDER 35 U.S.C. 120**

- ☐ The claim for the benefit of any such applications are set forth in the attached ADDED PAGES TO COMBINED DECLARATION AND POWER OF ATTORNEY FOR DIVISIONAL, CONTINUATION OR CONTINUATION-IN-PART (CIP) APPLICATION.

**ALL FOREIGN APPLICATION(S), IF ANY, FILED MORE THAN 12 MONTHS
(6 MONTHS FOR DESIGN) PRIOR TO THIS U.S. APPLICATION**

N/A

- ☐ Attached, as part of this declaration and power of attorney, is the authorization of the above-named

attorney(s) to accept and follow instructions from my representative(s).

POWER OF ATTORNEY

As a named inventor, I hereby appoint HOWARD M. PETERS, Reg. No. 29,202, HANA VERNY, Reg. No. 30,518, ALLSTON L. JONES, Reg. No. 27,906 and JANIS BIKŠA, Reg. No. 33,648 all of the address listed below, my principal attorney and agents, with full power of substitution and revocation, to appoint other principal and associate attorneys, to prosecute this application, and to transact all business in the Patent and Trademark Office connected therewith.

SEND CORRESPONDENCE TO:

Howard M. Peters
PETERS, VERNY, JONES & BIKŠA, LLP
385 Sherman Avenue, Suite 6
Palo Alto, CA 94306-1840
Telephone No.: (650) 324-1677

DECLARATION

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of sole or first inventor Deborah Wenzel

Inventor's signature X Deborah C. Wenzel

Date January 11, 1999 Country of Citizenship U.S.A.

Residence 534 Ashbury Street, San Francisco, California 94117

Post Office Address Same as above

CHECK PROPER BOX(ES) FOR ANY ADDED PAGE(S) FORMING A PART OF THIS DECLARATION

- () Signature for third and subsequent joint inventors. Number of pages added ____.
- () Signature by administrator(trix), executor(trix) or legal representative for deceased or incapacitated inventor. Number of pages added ____.
- () Signature for inventor who refuses to sign or cannot be reached by person authorized under 37 C.F.R. 1.47. Number of pages added ____.